



PRODUCT FEATURES

- Sliding doors front and rear
- Single glazed
- Four adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Solid front glass - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

CABINET DIMENSIONS & SPECIFICATIONS

Ambient






Model	Cabinet			Shelving no.	Display m2	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5AB9	900	750	1380	4 + base		0.3 Amp	10amp 3 pin plug	144	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

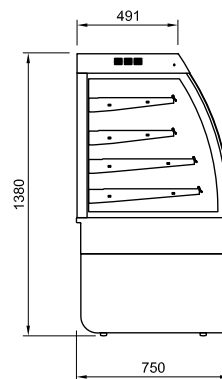

REAR VIEW



PRODUCT FEATURES

- Sliding doors front and rear
- Single glazed
- Four adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Solid front glass - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

CABINET DIMENSIONS & SPECIFICATIONS

Ambient






Model	Cabinet			Shelving no.	Display m ²	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5AB12	1200	750	1380	4 + base		0.4 Amp	10amp 3 pin plug	205	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

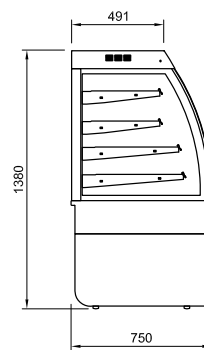

REAR VIEW



PRODUCT FEATURES

- Sliding doors front and rear
- Single glazed
- Four adjustable shelves
- Ticket strips on shelves and deck
- Undershelf and canopy LED lights
- Solid front glass - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

CABINET DIMENSIONS & SPECIFICATIONS

Ambient






Model	Cabinet			Shelving no.	Display m2	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5AB15	1500	750	1380	4 + base		0.5 Amp	10amp 3 pin plug	252	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

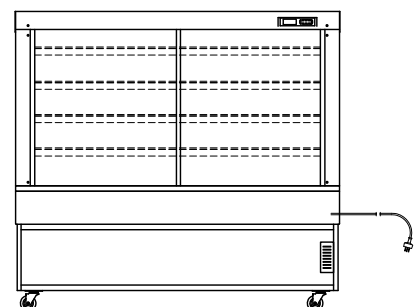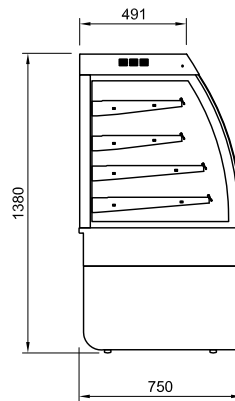

REAR VIEW