



PRODUCT FEATURES

- Open front
- Individual shelf heating
- Deck forced heating
- Single glazed
- Hinged rear door
- Ticket strips on shelves and base
- Undershelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point






Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)		
BTGOH6	600	750	1380	3+BASE	490X255	490X335	490X415	548X595	50	

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Operating Current	Connection	Voltage
8.1 Amp	10amp 3 pin plug	50/60 Hertz 240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

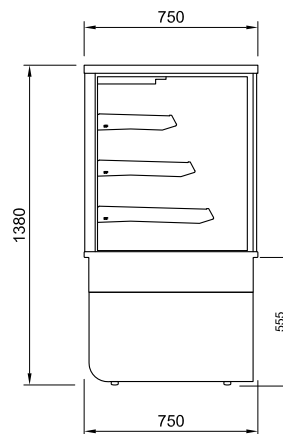

REAR VIEW



PRODUCT FEATURES

- Open front
- Individual shelf heating
- Deck forced heating
- Single glazed
- Sliding rear doors
- Ticket strips on shelves and base
- Undershelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point






Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)		
BTGOH9	900	750	1380	3+BASE	790X255	790X335	790X415	848X595	96	

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
12.6 Amp	15amp 3 pin plug	240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 15 amp 1 phase socket required.

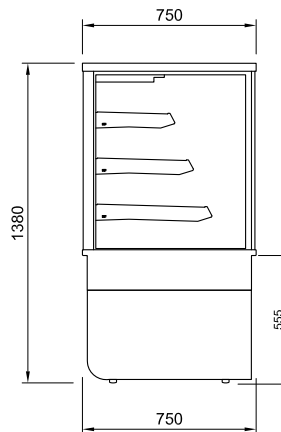



PRODUCT FEATURES

- Open front 1500mm high
- Individual shelf heating
- Deck forced heating
- Single glazed
- Hinged rear door
- Ticket strips on shelves and base
- Undershelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point






Model	Cabinet			Shelving no.	SHELVES SIZE				BASE(WXD)	Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	4TH			
TTGOH6	600	750	1500	4+BASE	490X345	490X425	490X505	548X595	548X595	95	

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Operating Current	Connection	Voltage
9.3 Amp	10amp 3 pin plug	240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

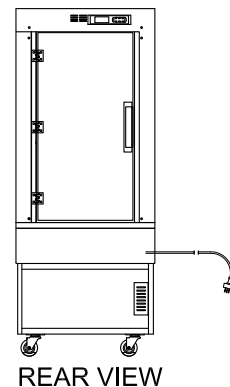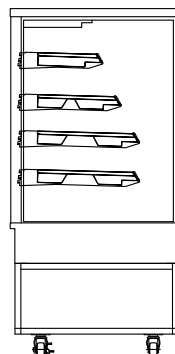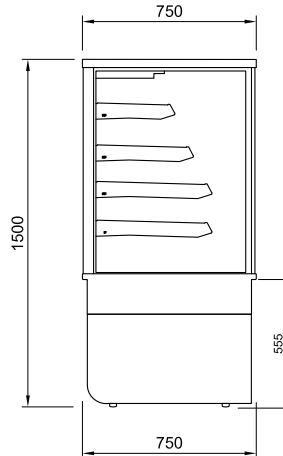



PRODUCT FEATURES

- Open front 1500mm high
- Individual shelf heating
- Deck forced heating
- Single glazed
- Sliding rear doors
- Ticket strips on shelves and base
- Undershelf and canopy LED lights

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75° factory set point






Model	Cabinet			Shelving no.	SHELVES SIZE				BASE(WXD)	Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	4TH			
TTGOH9	900	750	1500	4+BASE	790X345	790X425	790X505	748X595	848X595	136	

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Operating Current	Connection	Voltage
		50/60 Hertz
14.6 Amp	20 lead only	240V

ELECTRICAL POWER

Electrical power cord 2200mm
20 amp 1 phase hard wired to isolator.

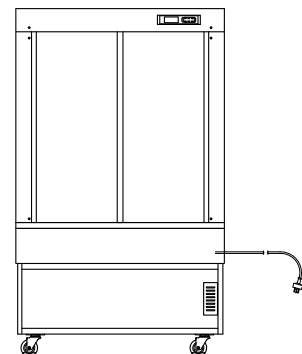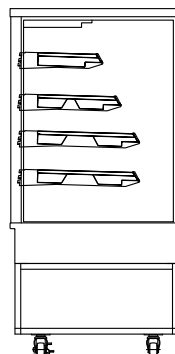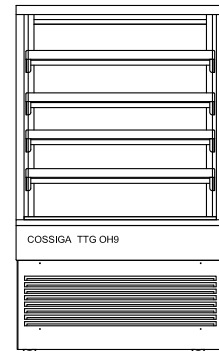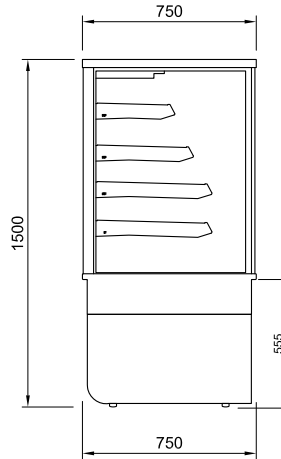

REAR VIEW