



PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Shelf length w x d	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm					
BTGRA10	1000	750	1380	3 + base	RF 610 x 445 AB 210 x 445	RF 645 x 480 AB 260 x 480	100 x 100 mm RF 102 AB 44	2.00





* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
R134A	5.0 Amp	10amp 3 pin plug	50/60 Hertz 240V



ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

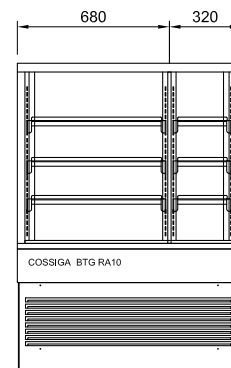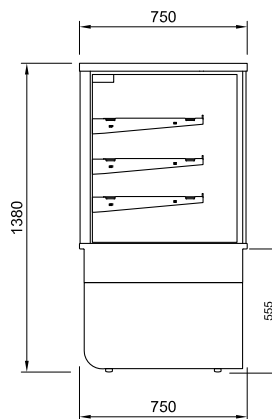

REAR VIEW



PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point






Model	Cabinet			Shelving no.	Shelf length w x d	base tray w x d	Total food units 100 x 100 mm	Display m ²
	Length mm	Depth mm	Height mm					
BTGRA15	1500	750	1380	3 + base	RF 760 x 445 AB 535 x 445	RF 820 x 480 AB 570 x 480	RF 124 AB 90	2.40

* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
R134A	5.0 Amp	10amp 3 pin plug	50/60 Hertz 240V

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

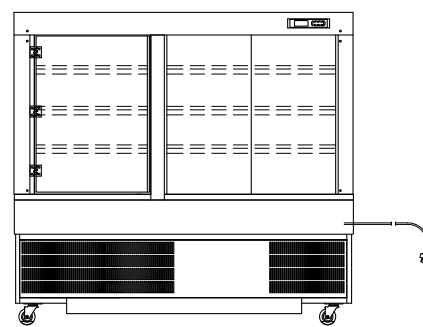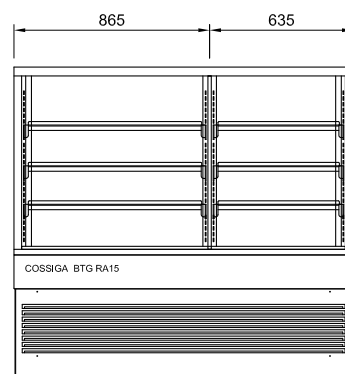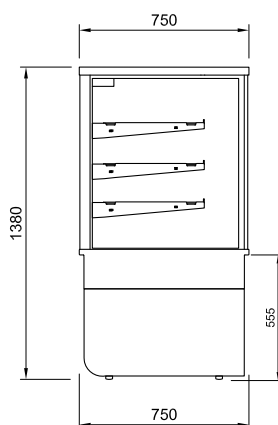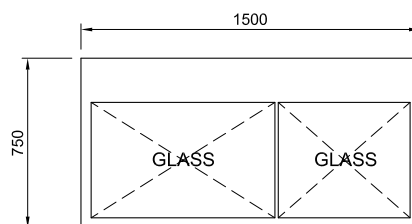

REAR VIEW