




RF

BTGRF6
BTGRF9
BTGRF12
BTGRF15
BTGRF18

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors (RF6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Deck forced refrigeration
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

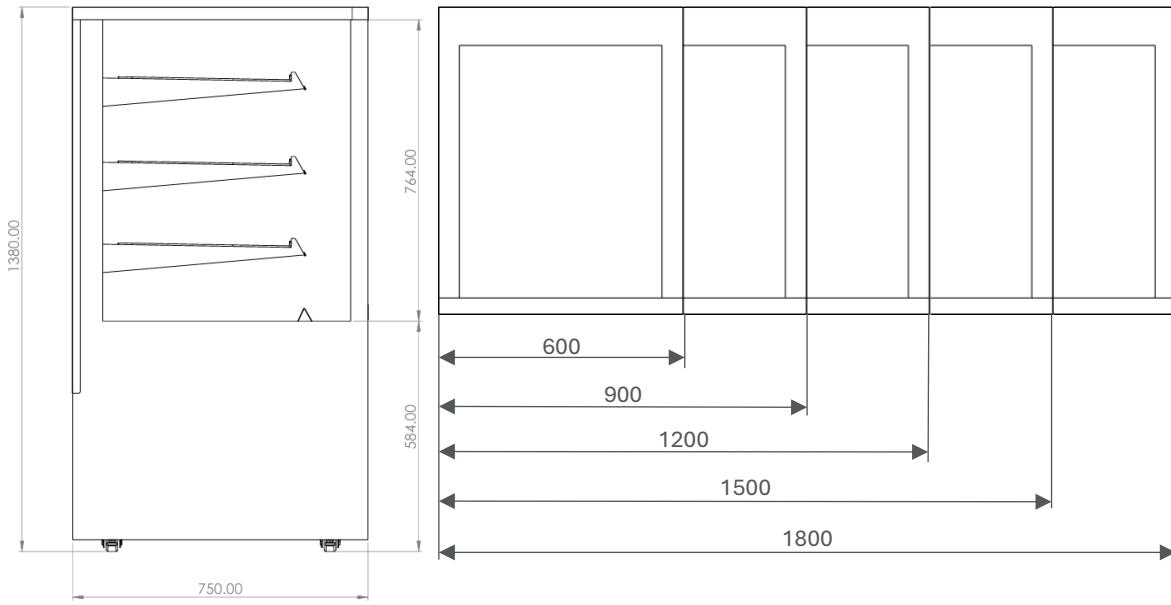


| MODEL | CABINET | | | | SHELVING | OPERATING TEMP | SHELF | BASE TRAY | TOTAL FOOD | DISPLAY | FREQUENCY | REFRIGERANT | POWER | | | CONNECTION POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | |
|------------|-------------|------------|-------------|-----------|--------------|----------------|------------|------------|------------|---------|-----------|-------------|---------|-----|---------------|------------------------------|---------|-------------|---------------------|-------------|-----------|
| | LENGTH (MM) | DEPTH (MM) | HEIGHT (MM) | WEIGHT KG | | | | | | | | | KW 230V | AMP | NZ/AUS 10 AMP | UK 13 AMP | V | LENGTH (MM) | DEPTH (MM) | HEIGHT (MM) | WEIGHT KG |
| BTGRF6 | 600 | 750 | 1380 | 175 | 3 + BASE | 3-5 | 490 X 445 | 540 X 510 | 86 | 0.92 | 50 | R290 | 1.00 | 5.5 | 3 PIN PLUG | 3 PIN PLUG | 220-240 | 700 | 830 | 1550 | 180 |
| BTGRF6-SD | | | | | | | | | | | | | | | | | | | | | |
| BTGRF9 | 900 | 750 | 1380 | 224 | 3 + BASE | 3-5 | 790 X 445 | 840 X 510 | 136 | 1.48 | 50 | R290 | 1.00 | 5.5 | 3 PIN PLUG | 3 PIN PLUG | 220-240 | 1000 | 830 | 1550 | 235 |
| BTGRF9-SD | | | | | | | | | | | | | | | | | | | | | |
| BTGRF12 | 1200 | 750 | 1380 | 273 | 3 + BASE | 3-5 | 1090 X 445 | 1140 X 510 | 175 | 2.03 | 50 | R290 | 1.20 | 6.6 | 3 PIN PLUG | 3 PIN PLUG | 220-240 | 1300 | 830 | 1550 | 279 |
| BTGRF12-SD | | | | | | | | | | | | | | | | | | | | | |
| BTGRF15 | 1500 | 750 | 1380 | 329 | 3 + BASE | 3-5 | 1390 X 445 | 1440 X 510 | 285 | 2.59 | 50 | R290 | 1.52 | 8.3 | 3 PIN PLUG | 3 PIN PLUG | 220-240 | 1600 | 830 | 1550 | 337 |
| BTGRF15-SD | | | | | | | | | | | | | | | | | | | | | |
| BTGRF18 | 1800 | 750 | 1380 | 380 | 2 x 3 + BASE | 3-5 | 827 X 445 | 1740 X 510 | 325 | 3.14 | 50 | R290 | 1.52 | 8.3 | 3 PIN PLUG | 3 PIN PLUG | 220-240 | 1900 | 830 | 1550 | 388 |
| BTGRF18-SD | | | | | | | | | | | | | | | | | | | | | |

FREESTANDING

Freestanding cabinets come with default rear venting

Cool intake air comes from both front and rear and hot exhaust air vents out the rear

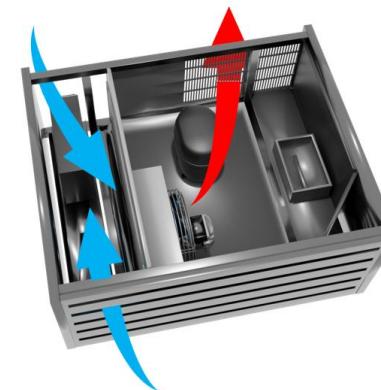

ROLLED INTO BENCH


Cabinets can be rolled into or against a bench, both intaking and extracting out the rear



UP AGAINST A WALL


When pushed up against a wall, the baffle can be swapped to both intake and extract out the front of the cabinet

**Refer to page 3 for
baffle swapping
information**

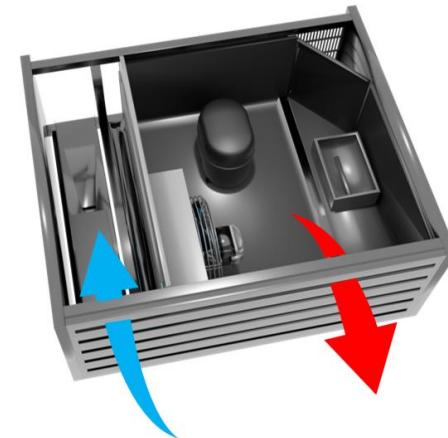


REAR VENTING

Cabinets come standard with the baffle positioned to direct the exhaust airflow out the rear of the cabinet

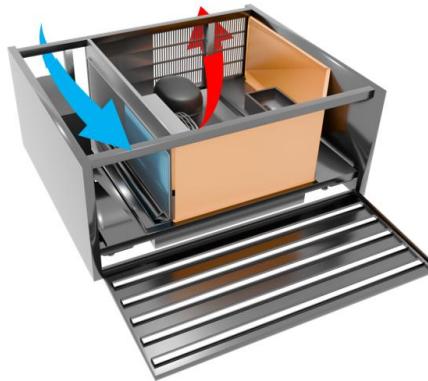


FRONT VENTING

When front venting is required, the baffle can be swapped to direct the exhaust airflow out the front of the cabinet

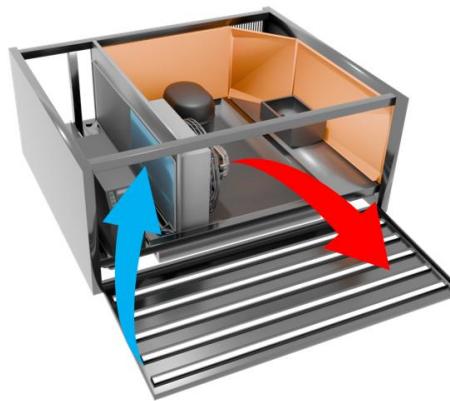


BAFFLE SWAPPING

The baffle comes in two parts which can be unscrewed from the cabinet structure and re-screwed in either a front venting or rear venting position

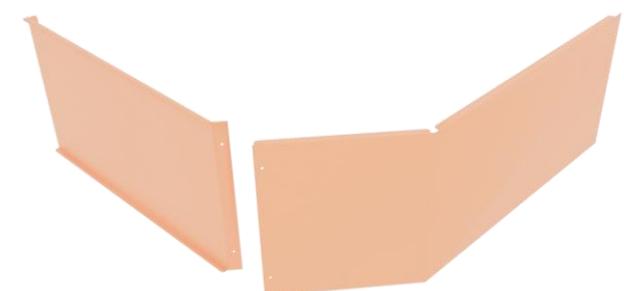

CONTROLLER BOX MOVEMENT

The controller box can be swapped to face the rear or front based on the placement of the cabinet. Standard configuration has the controller box facing the rear. If there is no access to the rear, the controller box can be lifted at an angle off the tray and moved to face the front

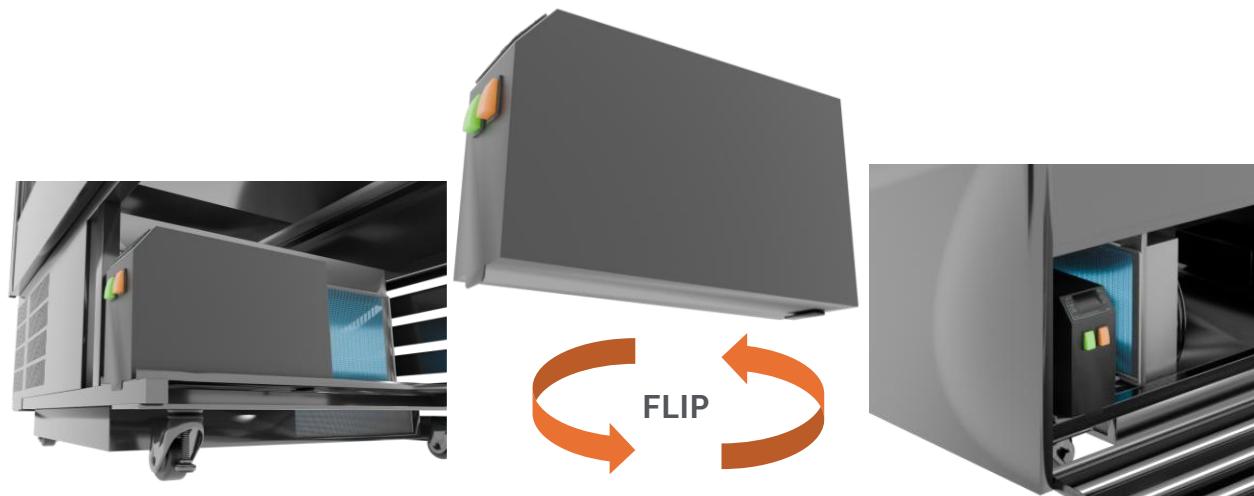


CABINET PLACEMENT

SIDE BY SIDE



Cabinets can be placed side by side without the need for a gap between

BACK TO BACK

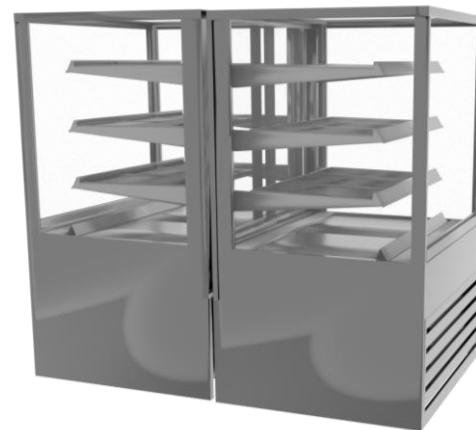


Units are front venting, both baffles have been rotated and controller boxes moved to the front

Correct placement ensures optimal performance


MECHANICAL AIRFLOW

Mechanical air flows such as air conditioning vents and fans can disturb the air curtain on open fronted units, causing failure

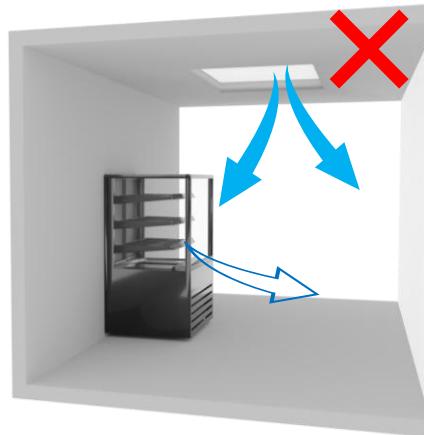


ENVIRONMENTAL CONDITIONS

Heat from other equipment and natural conditions, such as direct sunlight on units, can cause cooling to be dramatically affected, resulting in the compressor overloading

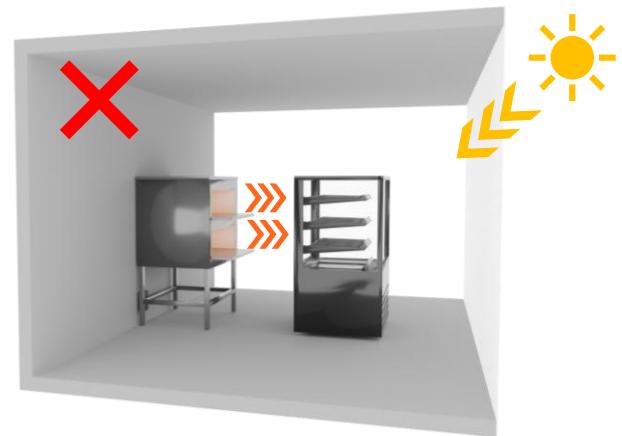

LOCATIONS TO AVOID



- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high wind
- Near any source producing excessive heat

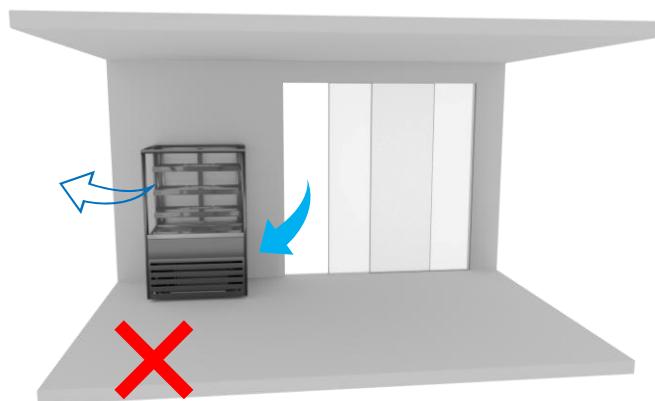

As standard, units are self evaporating to a receptacle in the condenser unit. In a new site where external drainage is accessible, it is recommended by-passing the evaporation dish. A plastic hose can be attached to the end of the condensate drain and re-directed as shown. This reduces power consumption and will result in less maintenance being required over time.

PLUMBED DRAINAGE TO WASTE


- Plumbed to waste following all local plumbing and building codes
- Building waste by client
- Preferred method in high humidity conditions

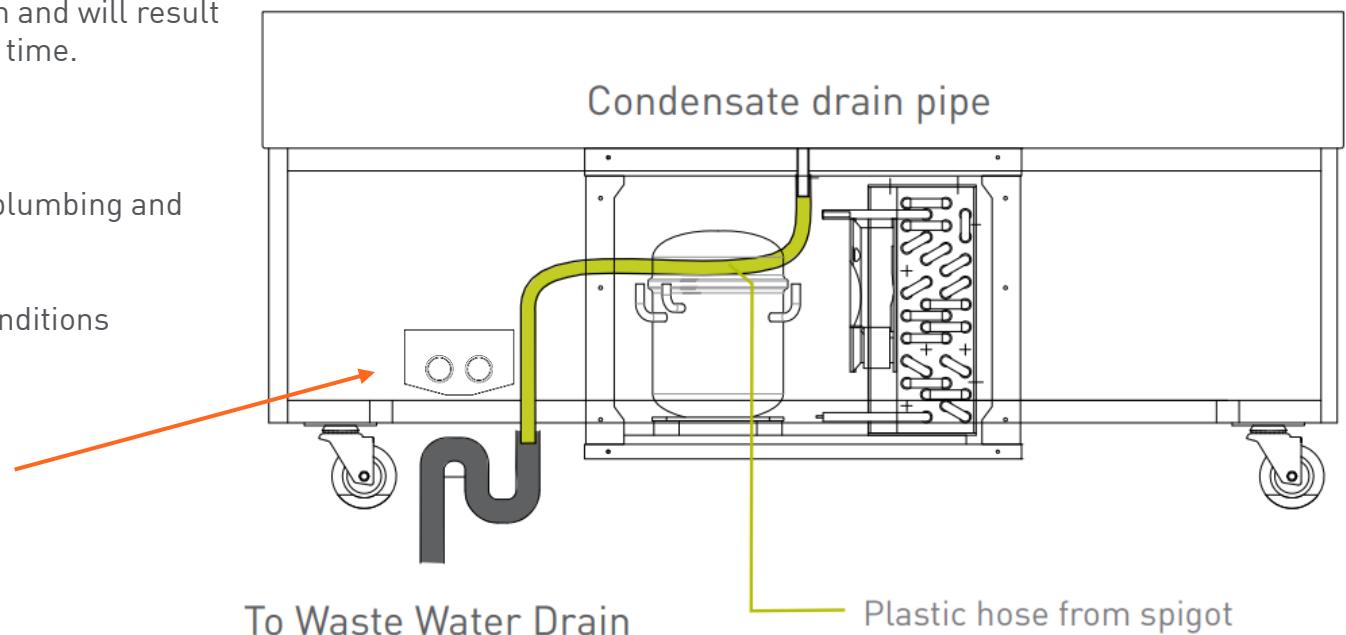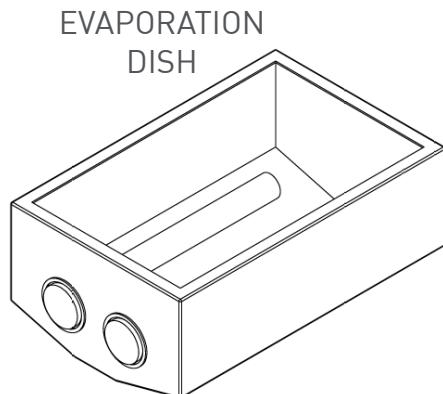

CONDENSER FILTER NET



In all BTGRF models (EXCEPT BTGRF6), there are filter nets covering the condenser face. To ensure excellent performance and maintain the quality of your cabinet, these filter nets should be retrieved and cleaned every 2 weeks

FILTER NET ASSEMBLY

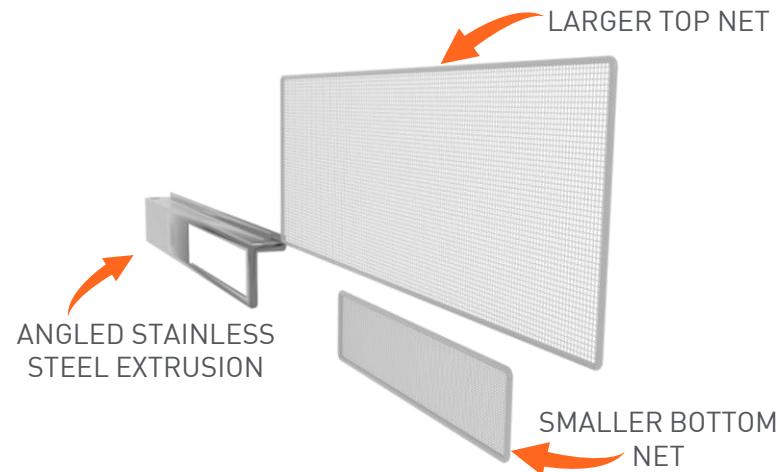

FILTER NET REMOVAL FROM FRONT

- Pull the front grill down
- Pull larger top net out
- Lift angled stainless steel extrusion up and out
- Remove smaller bottom net from stainless steel extrusion
- Brush or vacuum both filter nets

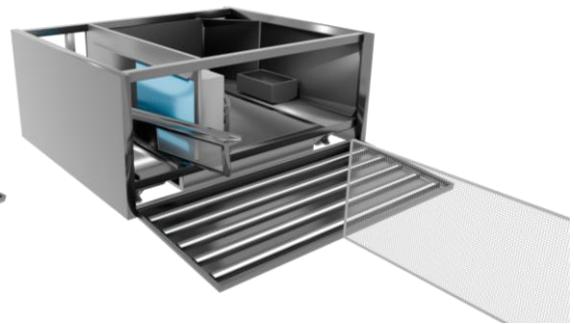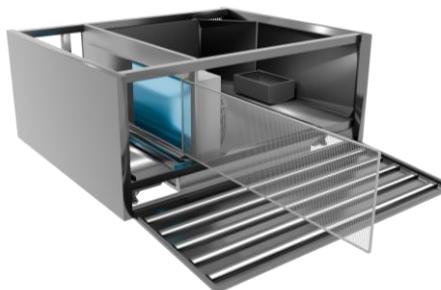

FILTER NET REMOVAL FROM REAR


- Pull larger top net out
- Lift angled stainless steel extrusion up and out
- Remove smaller bottom net from stainless steel extrusion
- Brush or vacuum both filter nets

ТИЛТИНГ FRONT GLASS

BTG RF units which have a solid glass front have the ability to tilt the front glass forward to allow for easy cleaning and ticket strip merchandising

TO TILT THE FRONT GLASS:

- Pull the top trim out, away from the cabinet before flipping it up
- Finger slots will be visible on top of the front glass
- Using the finger slots, pull the top of the glass out from the cabinet

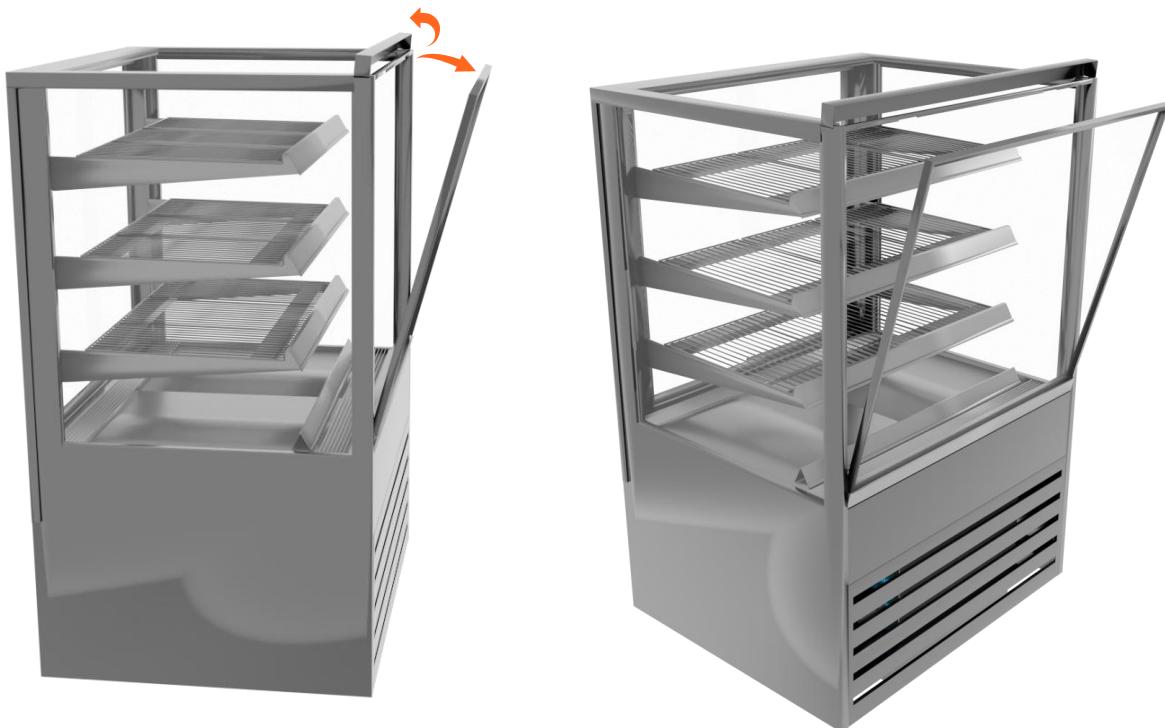


Always hold the glass when opening Hold the glass Always hold the glass when opening

WHEN OPENING THE SOLID FRONT, ENSURE YOU USE ONE HAND TO SUPPORT THE GLASS AS YOU CLEAN OR ACCESS THE TICKET STRIPS



FRONT AND REAR TRAY RACES

Stainless steel
Sold individually

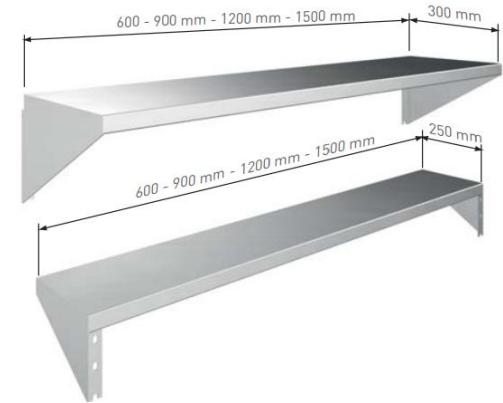


CASTOR EXTENSION KIT

Increases cabinet height to 1660mm



Set of four, uses existing castors, includes fixing bolts and washers and 2x fascia mounting plates

BAG HOLDER


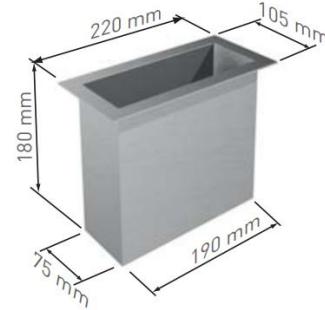


TONG HOLDER




GLASS FLAT OR ANGLED

The shelves can be lifted and pulled out until they lock into their second or third slots, resulting in angled shelves

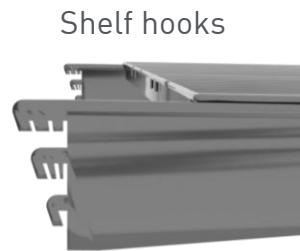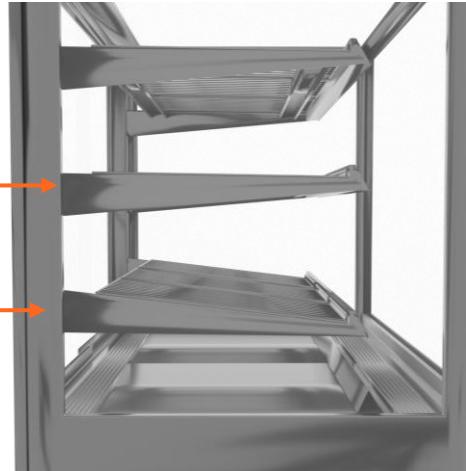

TICKET STRIP

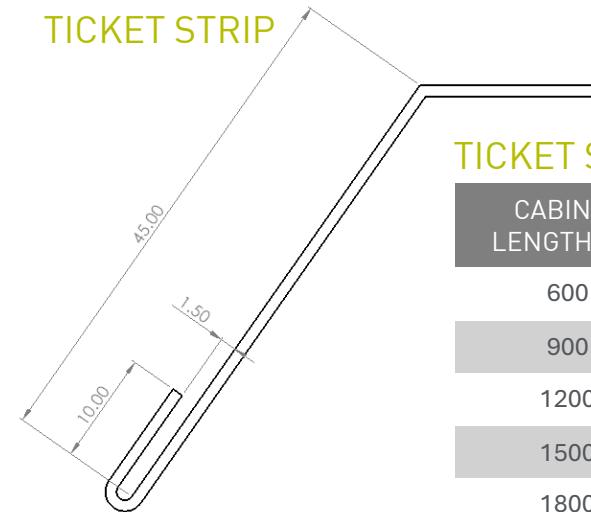

TICKET STRIP LENGTHS

| CABINET LENGTH MM | TICKET STRIP LENGTH MM |
|-------------------|------------------------|
| 600 | 490 |
| 900 | 790 |
| 1200 | 1090 |
| 1500 | 1390 |
| 1800 | 827 X 2 |

GLASS SHELF OPTIONS

Standard wire racks are removed and replaced with 6mm toughened glass panes



| MODEL | GLASS | WIDTH MM | DEPTH MM | PER SHELF PANES | SHELVES | TOTAL PANES |
|---------|--------------------------------|----------|----------|-----------------|---------|-------------|
| BTGRF6 | 6MM TOUGHENED – POLISHED EDGES | 240 | 430 | 2 | 3 | 6 |
| BTGRF9 | 6MM TOUGHENED – POLISHED EDGES | 390 | 430 | 2 | 3 | 6 |
| BTGRF12 | 6MM TOUGHENED – POLISHED EDGES | 540 | 430 | 2 | 3 | 6 |
| BTGRF15 | 6MM TOUGHENED – POLISHED EDGES | 690 | 430 | 2 | 3 | 6 |