


STGCH6-SD  
STGCH6



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors (HC6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

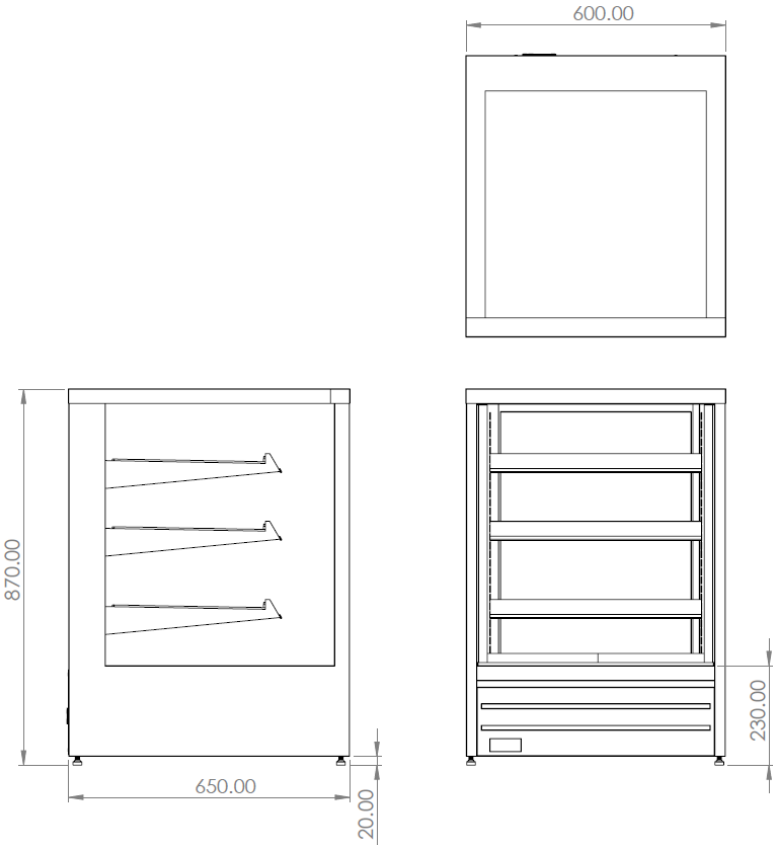

CABINET DIMENSIONS AND SPECIFICATIONS


| MODEL               |             | CABINET    |             |           | SHELVING | OPERATING TEMP | SHELF     | BASE TRAY | TOTAL FOOD  | DISPLAY | FREQUENCY | POWER   |     | CONNECTION<br>POWER CORD<br>2200MM |            | VOLTAGE | PACKED FOR SHIPPING |            |             |           |
|---------------------|-------------|------------|-------------|-----------|----------|----------------|-----------|-----------|-------------|---------|-----------|---------|-----|------------------------------------|------------|---------|---------------------|------------|-------------|-----------|
|                     | LENGTH (MM) | DEPTH (MM) | HEIGHT (MM) | WEIGHT KG |          | DEG C          | W X D     | W X D     | 100MM UNITS | M²      | Hz        | KW 230V | AMP | NZ/AUS 10 AMP                      | UK 13 AMP  | V       | LENGTH (MM)         | DEPTH (MM) | HEIGHT (MM) | WEIGHT KG |
| STGCH6<br>STGCH6-SD | 600         | 650        | 870         | 90        | 3 + BASE | 75-85          | 490 X 350 | 560 X 420 | 74          | 1.18    | 50        | 1.3     | 5.4 | 3 PIN PLUG                         | 3 PIN PLUG | 220-240 | 700                 | 730        | 1040        | 97        |

STGCH9-SD  
STGCH9



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors (HC6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

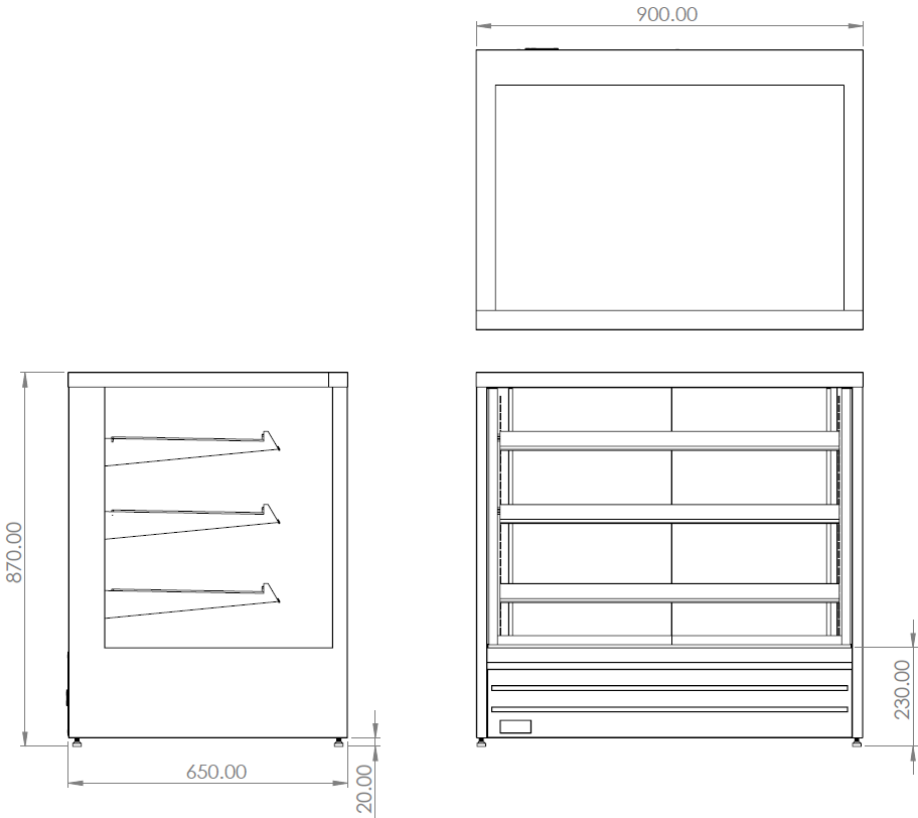

CABINET DIMENSIONS AND SPECIFICATIONS


| MODEL               | CABINET        |               |                |              | SHELVING | OPERATING<br>TEMP | SHELF        |              | BASE<br>TRAY | TOTAL<br>FOOD | DISPLAY | FREQUENCY | POWER      |     | CONNECTION<br>POWER CORD<br>2200MM |               | VOLTAGE | PACKED FOR SHIPPING |               |                |              |
|---------------------|----------------|---------------|----------------|--------------|----------|-------------------|--------------|--------------|--------------|---------------|---------|-----------|------------|-----|------------------------------------|---------------|---------|---------------------|---------------|----------------|--------------|
|                     | LENGTH<br>(MM) | DEPTH<br>(MM) | HEIGHT<br>(MM) | WEIGHT<br>KG |          |                   | W X D        | W X D        |              |               |         |           | KW<br>230V | AMP | NZ/AUS<br>10 AMP                   | UK<br>13 AMP  |         | LENGTH<br>(MM)      | DEPTH<br>(MM) | HEIGHT<br>(MM) | WEIGHT<br>KG |
| STGCH9<br>STGCH9-SD | 900            | 650           | 870            | 112          | 3 + BASE | 75-85             | 790 X<br>350 | 860 X<br>420 |              | 119           | 1.71    | 50        | 1.8        | 7.4 | 3 PIN<br>PLUG                      | 3 PIN<br>PLUG | 220-240 | 1000                | 730           | 1040           | 119          |

STGCH12-SD  
STGCH12



### PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors (HC6 Hinged)
- Solid front or sliding front doors
- Solid front that hinges at base
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

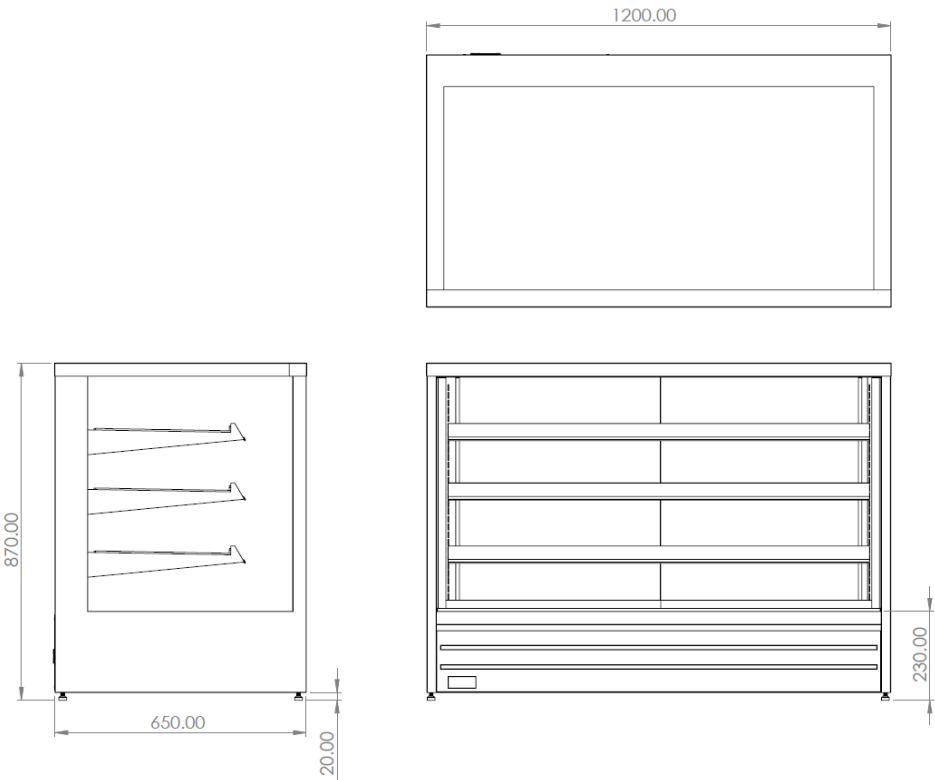

### CABINET DIMENSIONS AND SPECIFICATIONS

| MODEL                 | CABINET        |               |                |              | SHELVING | OPERATING<br>TEMP | SHELF         | BASE<br>TRAY  | TOTAL<br>FOOD | DISPLAY | FREQUENCY | POWER      |     | CONNECTION<br>POWER CORD<br>2200MM |               | VOLTAGE | PACKED FOR SHIPPING |               |                |              |
|-----------------------|----------------|---------------|----------------|--------------|----------|-------------------|---------------|---------------|---------------|---------|-----------|------------|-----|------------------------------------|---------------|---------|---------------------|---------------|----------------|--------------|
|                       | LENGTH<br>(MM) | DEPTH<br>(MM) | HEIGHT<br>(MM) | WEIGHT<br>KG |          |                   |               |               |               |         |           | KW<br>230V | AMP | NZ/AUS<br>15 AMP                   | UK<br>13 AMP  |         | LENGTH<br>(MM)      | DEPTH<br>(MM) | HEIGHT<br>(MM) | WEIGHT<br>KG |
| STGCH12<br>STGCH12-SD | 1200           | 650           | 870            | 128          | 3 + BASE | 75-85             | 1090 X<br>350 | 1160 X<br>420 | 163           | 2.19    | 50        | 2.3        | 9.6 | 3 PIN<br>PLUG                      | 3 PIN<br>PLUG | 220-240 | 1300                | 730           | 1040           | 135          |