



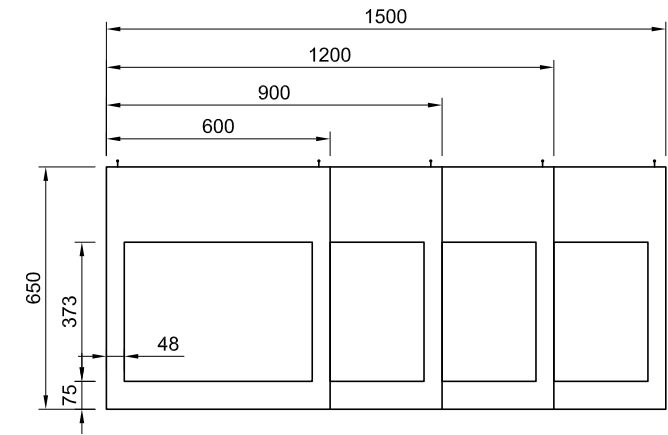

RF

STG RF6
STG RF9
STG RF12
STG RF15



- Deck forced refrigeration
- Sliding doors front and rear
- Heated double glazed glass top, sides and solid front
- Two adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Integral condenser
- Self evaporating
- Solid glass front - optional
- STG RF6 hinged rear door

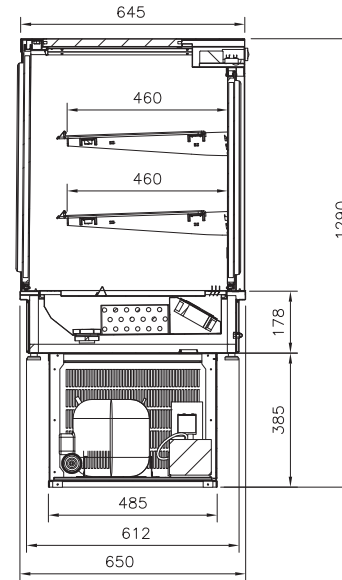

HT

STG HT6
STG HT9
STG HT12

- Sliding doors front and rear
- Single glazed
- Three adjustable shelves
- Ticket strips on shelves and deck
- Under shelf and canopy LED lights
- Solid glass front - optional
- STG HT6 hinged rear door

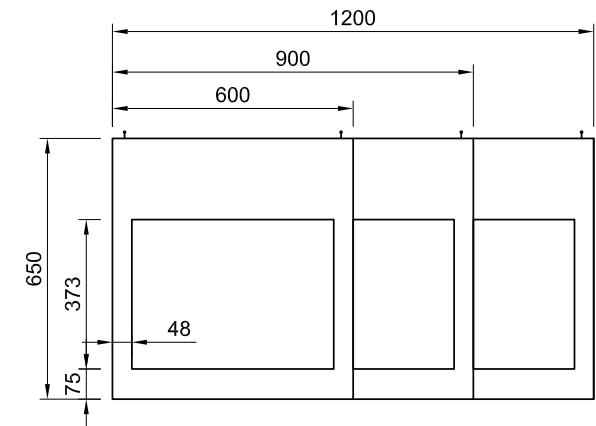
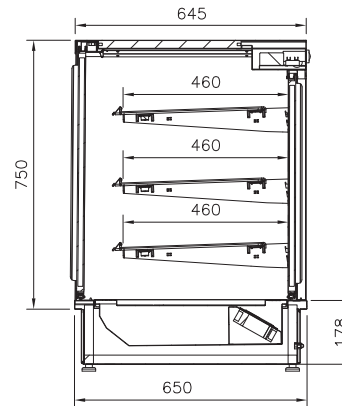




AB

STG AB6
STG AB9
STG AB12



- Sliding doors front and rear
 - Single glazed
 - Three adjustable shelves
 - Ticket strips on shelves and deck
 - Under shelf and canopy LED lights
 - Solid glass front - optional
 - Ambient converted from heated
 - Air removal fan installed in ceiling
- STG AB6 hinged rear door

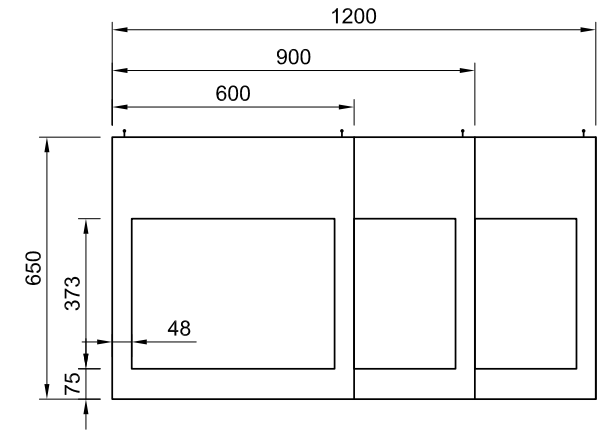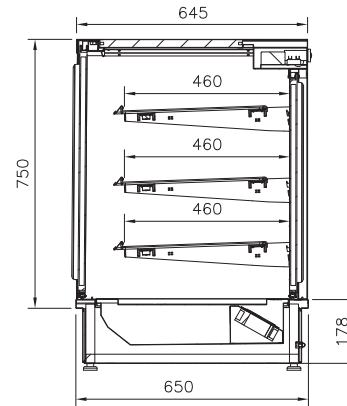

BM

STG BM9
STG BM12
STG BM15


- Sliding doors front and rear
- Overhead halogen lights
- Wet / dry element in base
- Single glazed glass
- Solid glass front - optional

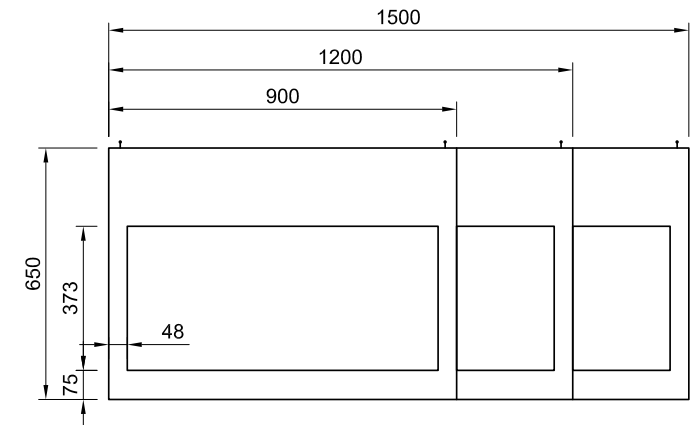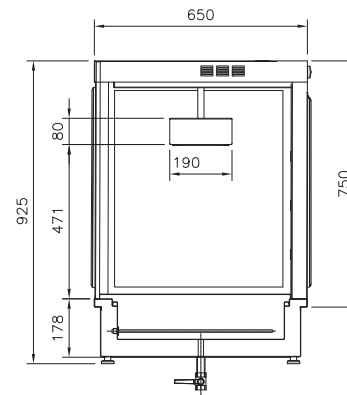



CC STG CC9 STG CC12

- Compact chilled
 - Integral condenser
 - Deck forced refrigeration
 - Sliding doors front and rear
 - Double glazed
 - Two adjustable shelves
 - Ticket strips on shelves and deck
 - Under shelf and canopy LED lights
 - Self evaporating
 - Solid glass front - optional
- Counter top only - cannot drop into benchtop

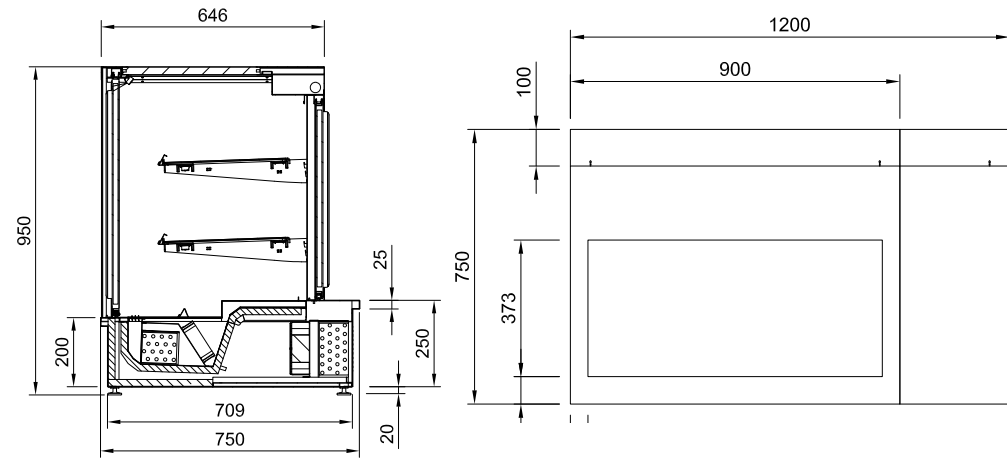

MODEL	CABINET			SHELVING		REFRIGERANT	TOTAL FOOD 100MM UNITS	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING					
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	CUT OUTS	NO.						SIZE W X D	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUBE
STGRF6-SD STGRF6	600	650	925	615x620	2+BASE	490 X 395	134A	55	4.3 AMP	10 AMP 3 PIN PLUG	220~240V	700	730	1400	143	0.72
STGRF9-SD STGRF9	900	650	925	915x620	2+BASE	790 X 395	134A	84	4.5 AMP	10 AMP 3 PIN PLUG	220~240V	1000	730	1450	178	1.06
STGRF12-SD STGRF12	1200	650	925	1215x620	2+BASE	1090 X 395	134A	121	5.0 AMP	10 AMP 3 PIN PLUG	220~240V	1300	730	1450	212	1.38
STGRF15-SD STGRF15	1500	650	925	1515x620	2+BASE	1390 x 395	134a	154	5.2 AMP	10 AMP 3 PIN PLUG	220~240V	1600	730	1450	243	1.69
STGHT6-SD STGHT6	600	650	925	615x620	3+BASE	490 x 395		55	5.4 AMP	10 AMP 3 PIN PLUG	220~240V	700	730	1100	88	0.56
STGHT9-SD STGHT9	900	650	925	915x620	3+BASE	790 x 395		84	7.42 AMP	10 AMP 3 PIN PLUG	220~240V	1000	730	1100	110	0.80
STGHT12-SD STGHT12	1200	650	925	1215x620	3+BASE	1090 x 395		121	9.52 AMP	10 AMP 3 PIN PLUG	220~240V	1300	730	1100	126	1.04
STGAB6-SD STGAB6	600	650	925	615x620	3+BASE	490 x 395		55	0.2 AMP	10 AMP 3 PIN PLUG	220~240V	700	730	1100	77	0.56
STGAB9-SD STGAB9	900	650	925	915x620	3+BASE	790 x 395		84	0.3 AMP	10 AMP 3 PIN PLUG	220~240V	1000	730	1100	97	0.80
STGAB12-SD STGAB12	1200	650	925	1215x620	3+BASE	1090 x 395		121	0.4 AMP	10 AMP 3 PIN PLUG	220~240V	1300	730	1100	110	1.04
STGBM9-SD STGBM9	900	650	925	915x620					9.9 AMP	15 AMP SUPPLY LEAD ONLY	220~240V	1000	730	1100	99	0.80
STGBM12-SD STGBM12	1200	650	925	1215x620					11.0 AMP	15 AMP SUPPLY LEAD ONLY	220~240V	1300	730	1100	119	1.04
STGBM15-SD STGBM15	1500	650	925	1515x620					15.0 AMP	20 AMP SUPPLY LEAD ONLY	220~240V	1600	730	1100	140	1.28
STGCC9-SD STGCC9	900	750	950	n/a	2+BASE	790 X 395	134A	84	4.5 AMP	10 AMP 3 PIN PLUG	220~240V	1000	730	1100	170	0.80
STGCC12-SD STGCC12	1200	750	950	n/a	2+BASE	1090 X 395	134A	121	5.0 AMP	10 AMP 3 PIN PLUG	220~240V	1300	730	1100	200	1.04

SLIDING FRONT DOORS and rear glass sliding doors STG-SD
SOLID FRONT and rear glass sliding doors STG