





## OR

TTG OR6  
TTG OR9  
TTG OR12

REFRIGERATED

- Open front
- Three adjustable glass shelves
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Pull down night blind

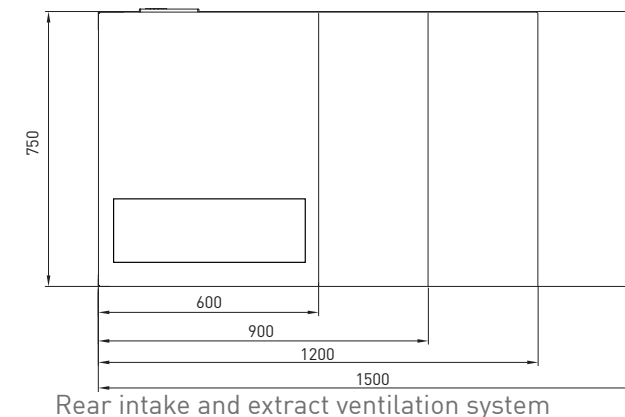
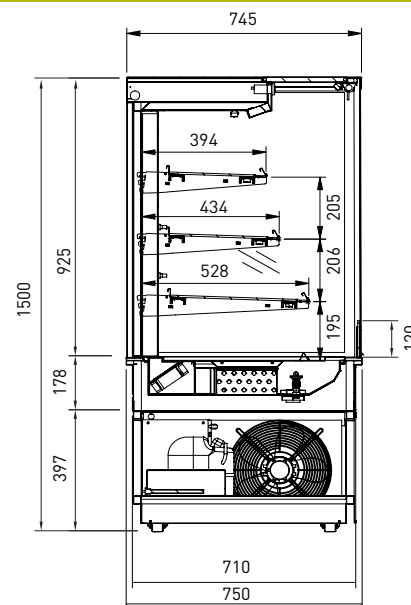


## OH

TTG OH6  
TTG OH9

HEATED



- Open front heated
- Four adjustable shelves
- Individual shelf heating
- Deck forced heating
- Single glazed
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

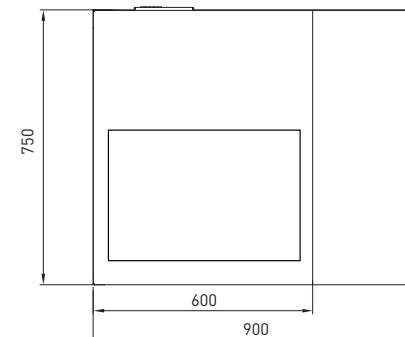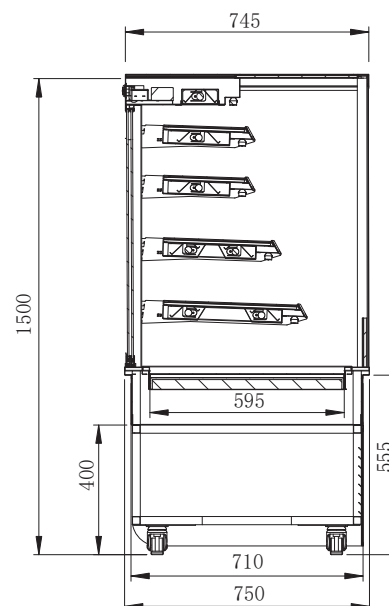



## RF TTG RF9 TTG RF12 REFRIGERATED

- Solid glass front
- Heated double glazed glass
- Heated rear sub frame
- Argon filled sliding rear doors
- Deck forced refrigeration
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Front doors not available for this model

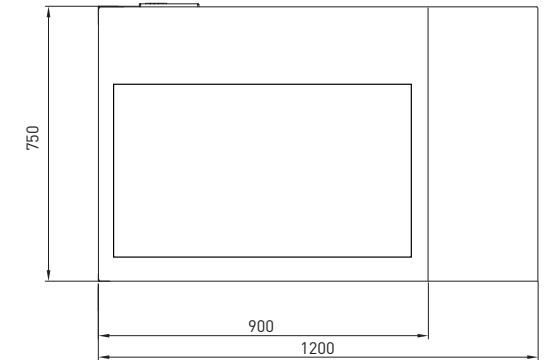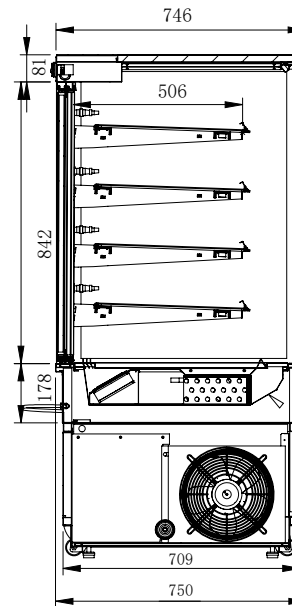

Rear intake and extract ventilation system

## CABINET DIMENSIONS & SPECIFICATIONS

| MODEL   | CABINET     |            |             | SHELVING | SHELVES SIZE |          |          |          |           | TOTAL FOOD | FREQUENCY | REFRIGERANT | OPERATING CURRENT | CONNECTION       | VOLTAGE  | PACKED FOR SHIPPING |     |             |            |
|---------|-------------|------------|-------------|----------|--------------|----------|----------|----------|-----------|------------|-----------|-------------|-------------------|------------------|----------|---------------------|-----|-------------|------------|
|         | LENGTH (MM) | DEPTH (MM) | HEIGHT (MM) |          | TOP          | 2ND      | 3RD      | 4TH      | BASE(WXD) |            |           |             |                   |                  |          | 100 MM UNITS        | HZ  | LENGTH (MM) | DEPTH (MM) |
| TTGOR6  | 600         | 750        | 1500        | 3+BASE   | 490X295      | 790X325  | 790X415  | NA       | 545X515   | 75         | 50/60 HZ  | 134A        | 3.3AMP            | 10AMP 3 PIN PLUG | 220~240V | 700                 | 830 | 1670        | 192        |
| TTGOR9  | 900         | 750        | 1500        | 3+BASE   | 790X295      | 790X325  | 790X415  | NA       | 845X515   | 120        | 50/60 HZ  | 134A        | 3.7AMP            | 10AMP 3 PIN PLUG | 220~240V | 1000                | 830 | 1670        | 246        |
| TTGOR12 | 1200        | 750        | 1500        | 3+BASE   | 1090X295     | 1090X325 | 1090X415 | NA       | 1145X515  | 155        | 50/60 HZ  | 134A        | 5.4AMP            | 10AMP 3 PIN PLUG | 220~240V | 1300                | 830 | 1670        | 300        |
| TTGOH6  | 600         | 750        | 1500        | 4+BASE   | 490X255      | 490X335  | 490X415  | 490X415  | 548X595   | 95         | 50/60 HZ  | NA          | 9.3AMP            | 15AMP 3 PIN PLUG | 220~240V | 700                 | 830 | 1670        | 132        |
| TTGOH9  | 900         | 750        | 1500        | 4+BASE   | 790X255      | 790X335  | 790X415  | 790X415  | 848X595   | 136        | 50/60 HZ  | NA          | 14.6AMP           | 20AMP LEAD ONLY  | 220~240V | 1000                | 830 | 1670        | 170        |
| TTGRF9  | 900         | 750        | 1500        | 4+BASE   | 790X445      | 790X445  | 790X445  | 790X445  | 845X515   | 168        | 50/60 HZ  | 134A        | 4.5AMP            | 10AMP 3 PIN PLUG | 220~240V | 1000                | 830 | 1670        | 246        |
| TTGRF12 | 1200        | 750        | 1500        | 4+BASE   | 1090X445     | 1090X445 | 1090X445 | 1090X445 | 1145X515  | 275        | 50/60 HZ  | 134A        | 5.0AMP            | 10AMP 3 PIN PLUG | 220~240V | 1300                | 830 | 1670        | 300        |

Maximum shelf load weight 15kg spread evenly