





## OR

TTG OR6  
TTG OR9  
TTG OR12

REFRIGERATED

- Open front
- Three adjustable glass shelves
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Pull down night blind
- Pigeonhole perspex screens

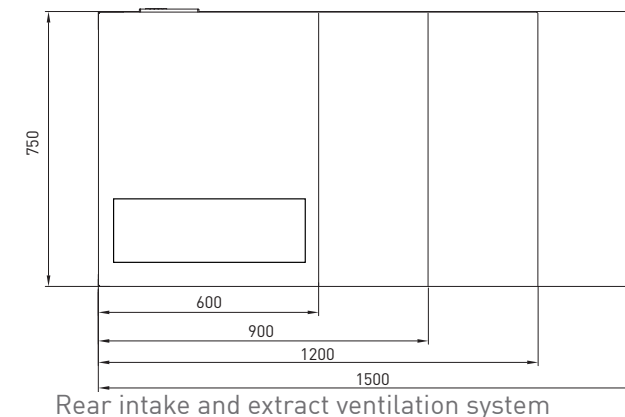
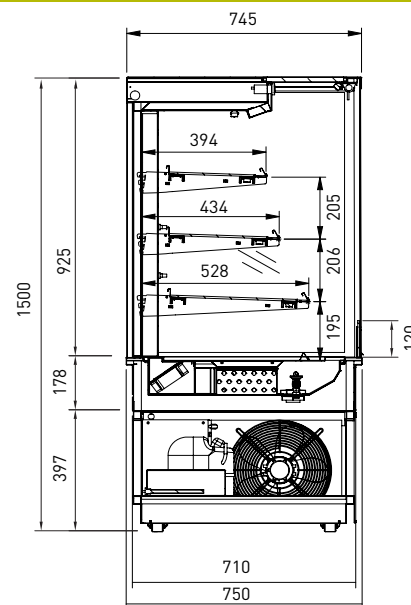


## OH

TTG OH6  
TTG OH9

HEATED

- Open front heated
- Four adjustable shelves
- Individual shelf heating
- Deck forced heating
- Single glazed
- Ticket strips on shelves and base
- Under shelf and canopy LED lights

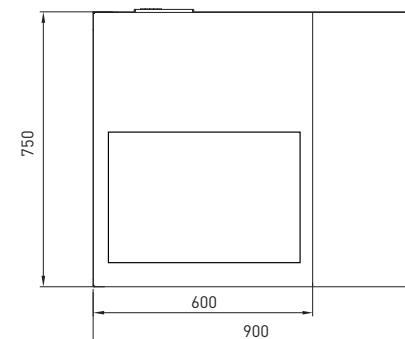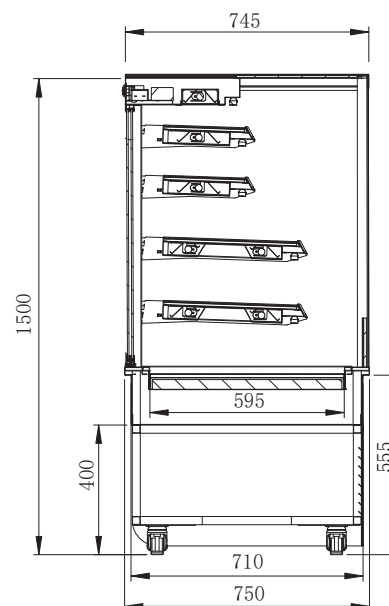





## RF

TTG RF9  
TTG RF12  
TTG RF15

REFRIGERATED

- Solid glass front
- Heated double glazed glass
- Heated rear sub frame
- Argon filled sliding rear doors
- Deck forced refrigeration
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Front doors not available for this model

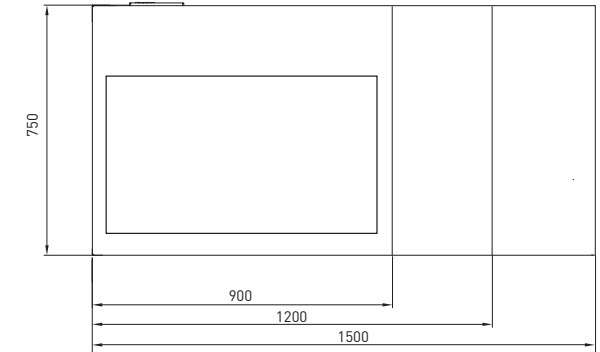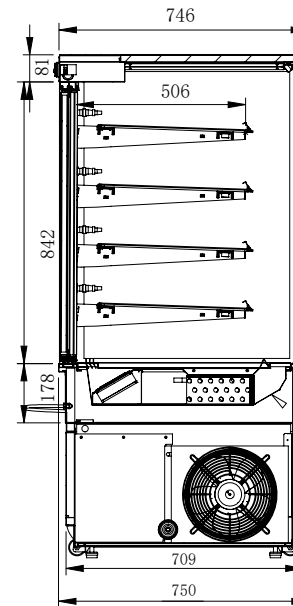

Rear intake and extract ventilation system

## CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	SHELVES SIZE					TOTAL FOOD 100 MM UNITS	FREQUENCY HZ	REFRIGERANT	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)		TOP	2ND	3RD	4TH	BASE(WXD)							LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)
TTGOR6	600	750	1500	3+BASE	490X295	790X325	500X415	NA	545X515	75	50/60 HZ	134A	3.3AMP	10AMP 3 PIN PLUG	220~240V	700	830	1670	192
TTGOR9	900	750	1500	3+BASE	790X295	790X325	790X415	NA	845X515	120	50/60 HZ	134A	3.7AMP	10AMP 3 PIN PLUG	220~240V	1000	830	1670	246
TTGOR12	1200	750	1500	3+BASE	1090X295	1090X325	1090X415	NA	1145X515	155	50/60 HZ	134A	5.4AMP	10AMP 3 PIN PLUG	220~240V	1300	830	1670	300
TTGOH6	600	750	1500	4+BASE	490X255	490X335	490X415	490X415	548X595	95	50/60 HZ	NA	9.3AMP	15AMP 3 PIN PLUG	220~240V	700	830	1670	132
TTGOH9	900	750	1500	4+BASE	790X255	790X335	790X415	790X415	848X595	136	50/60 HZ	NA	14.6AMP	20AMP LEAD ONLY	220~240V	1000	830	1670	170
TTGRF9	900	750	1500	4+BASE	790X445	790X445	790X445	790X445	845X515	168	50/60 HZ	134A	4.5AMP	10AMP 3 PIN PLUG	220~240V	1000	830	1670	246
TTGRF12	1200	750	1500	4+BASE	1090X445	1090X445	1090X445	1090X445	1145X515	275	50/60 HZ	134A	5.0AMP	10AMP 3 PIN PLUG	220~240V	1300	830	1670	300
TTGRF15	1500	750	1500	4+BASE	1390X445	1390X445	1390X445	1390X445	1445X515	382	50/60 HZ	134A	6.6AMP	10AMP 3 PIN PLUG	220~240V	1600	830	1670	352

Maximum shelf load weight 15kg spread evenly