



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Solid front glass - optional

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75^o factory set point






Model	Cabinet			Shelving no.	Display m2	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5HT9	900	750	1380	4 + base	1.73	6.2 Amp	10amp 3 pin plug	160	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

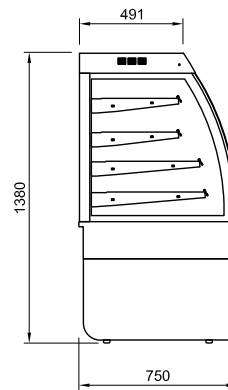

REAR VIEW



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Solid front glass - optional

CABINET DIMENSIONS & SPECIFICATIONS






Heated 75^o factory set point

Model	Cabinet			Shelving no.	Display m2	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5HT12	1200	750	1380	4 + base	1.97	8.3 Amp	10amp 3 pin plug	205	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.

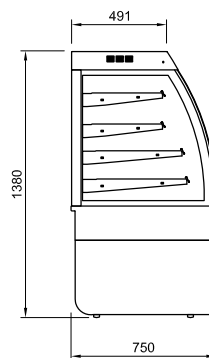

REAR VIEW



PRODUCT FEATURES

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Solid front glass - optional

CABINET DIMENSIONS & SPECIFICATIONS

Heated 75^o factory set point






Model	Cabinet			Shelving no.	Display m2	Operating Current	Connection	Total food units	Voltage
	Length mm	Depth mm	Height mm						
CD5HT12	1500	750	1380	4 + base		10.4 Amp	10amp 3 pin plug	252	50/60 Hertz 240V

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

ELECTRICAL POWER

Electrical power cord 2200mm

3 pin 10 amp 1 phase socket required.

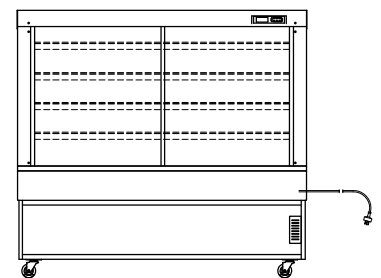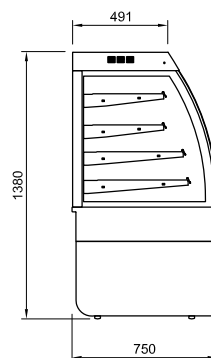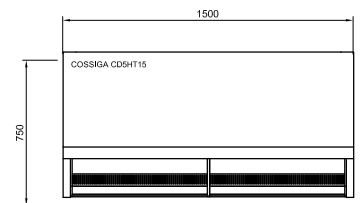

REAR VIEW