BTG RA10 TOWER SERIES

cossiga

PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor

Front doors not available for this model

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4° factory set point

Model	Cabinet			Shelving no.	Shelf length w x d	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm				100 x 100 mm	
BTGRA10	1000	750	1380	3 + base	RF 615 x 445 AB 238 x 445	RF 615 x 480 AB 238 x 480	RF 102 AB 44	2.00

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
			50/60 Hertz
R134A	4.3 Amp	10amp 3 pin plug	240V



ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32˚C

Maximum shelf load weight 15kg
spread evenly

All units rear venting

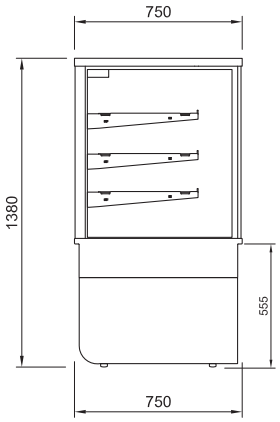

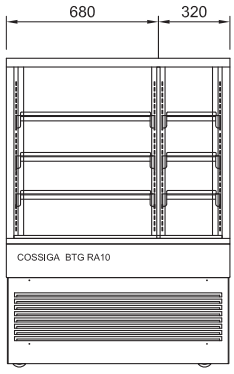





REAR VIEW

Download C.A.D models or contact us on COSSIGA.COM

BTG RA15 TOWER SERIES

cossiga

PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Undershelf and canopy LED lights
- Integral condensor

Front doors not available for this model

CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4° factory set point

Model	Cabinet			Shelving no.	Shelf length w x d	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm				100 x 100 mm	
BTGRA15	1500	750	1380	3 + base	RF 790 x 445 AB 564 x 445	RF790 x 510 AB 564 x 510	RF 124 AB 90	2.40

* prior to installation see, installation guidelines, ventillation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
			50/60 Hertz
R134A	4.6 Amp	10amp 3 pin plug	240V

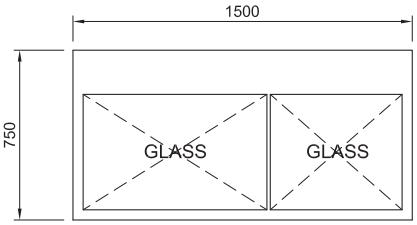

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32˚C

Maximum shelf load weight 15kg
spread evenly

All units rear venting

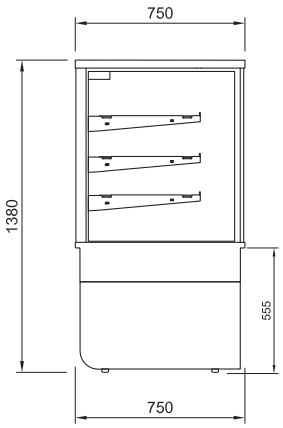

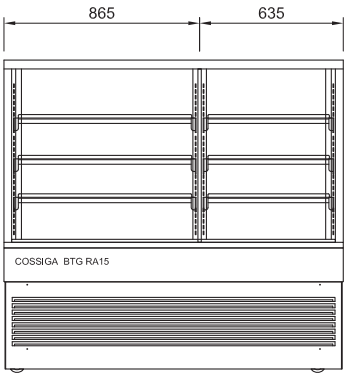



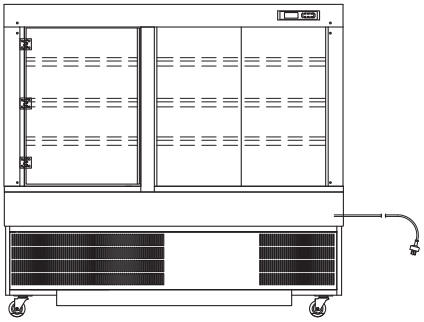

REAR VIEW

Download C.A.D models or contact us on COSSIGA.COM