



PRODUCT FEATURES

- Single glazed
- Hinged rear door
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling


CABINET DIMENSIONS & SPECIFICATIONS

Ambient

| Model | Cabinet | | | Shelving no. | Shelf length | Base tray w x d | Total food units | Display m ² |
|--------|-----------|----------|-----------|--------------|--------------|-----------------|------------------|------------------------|
| | Length mm | Depth mm | Height mm | | | | | |
| BTGAB6 | 600 | 750 | 1380 | 4 + base | 490 x 445 | 540 x 510 | 100 | 1.16 |

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents





| Operating Current | Connection | Voltage |
|-------------------|------------------|---------------------|
| 0.3 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |



ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required

Maximum shelf load weight 15kg
spread evenly

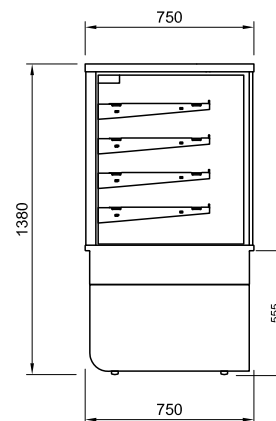

REAR VIEW



PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

CABINET DIMENSIONS & SPECIFICATIONS

Ambient

| Model | Cabinet | | | Shelving no. | Shelf length | Base tray w x d | Total food units | Display m2 |
|--------|-----------|----------|-----------|--------------|--------------|-----------------|------------------|------------|
| | Length mm | Depth mm | Height mm | | | | | |
| BTGAB9 | 900 | 750 | 1380 | 4 + base | 790 x 445 | 840 x 510 | 168 | 1.86 |






Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| Operating Current | Connection | Voltage |
|-------------------|------------------|-------------|
| | | 50/60 Hertz |
| 0.3 Amp | 10amp 3 pin plug | 240V |

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required

Maximum shelf load weight 15kg
spread evenly

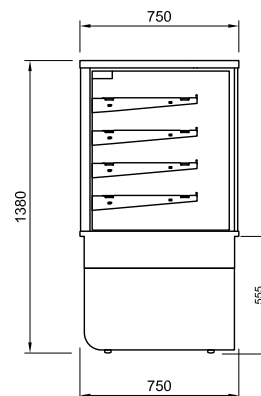

REAR VIEW



PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling

CABINET DIMENSIONS & SPECIFICATIONS

Ambient

| Model | Cabinet | | | Shelving no. | Shelf length | Base tray w x d | Total food units | Display m2 |
|---------|-----------|----------|-----------|--------------|--------------|-----------------|------------------|------------|
| | Length mm | Depth mm | Height mm | | | | | |
| BTGAB12 | 1200 | 750 | 1380 | 4 + base | 1090 x 445 | 1140 x 510 | 100 x 100 255 | 2.55 |






Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| Operating Current | Connection | Voltage |
|-------------------|------------------|---------------------|
| 0.4 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required

Maximum shelf load weight 15kg
spread evenly

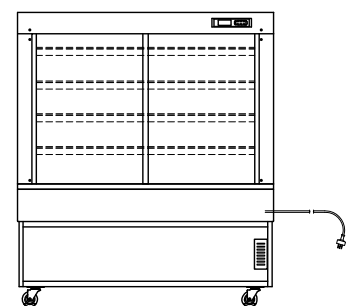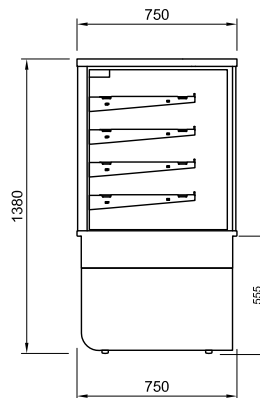



PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional
- Ambient converted from heated
- Air removal fan installed in ceiling


CABINET DIMENSIONS & SPECIFICATIONS

Ambient

| Model | Cabinet | | | Shelving no. | Shelf length | Base tray w x d | Total food units | Display m2 |
|---------|-----------|----------|-----------|--------------|--------------|-----------------|------------------|------------|
| | Length mm | Depth mm | Height mm | | | | | |
| BTGAB15 | 1500 | 750 | 1380 | 4 + base | 1390 x 445 | 1440 x 510 | 100 x 100 355 | 3.2 |

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents





| Operating Current | Connection | Voltage |
|-------------------|------------------|---------------------|
| 0.5 Amp | 10amp 3 pin plug | 50/60 Hertz 240V |

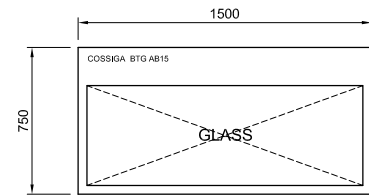

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required

Maximum shelf load weight 15kg
spread evenly

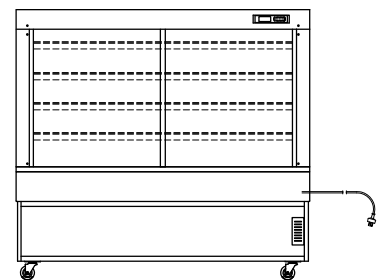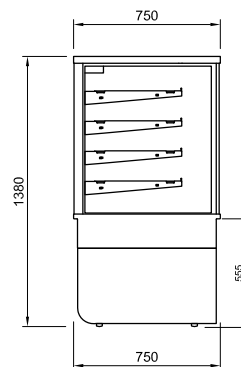

REAR VIEW