






Shown with panel option

RF

LPRF9
LPRF12
LPRF15

- Low Velocity air over refrigeration
- Dual canopy LED lights
- Adjustable deck height
- Integral condenser
- Self evaporating
- Polished glass front and sides
- Slide under and over perspex rear covers
- Ambient storage cabinet underneath
- Lockable castors
- Side and front panels available as an optional extra

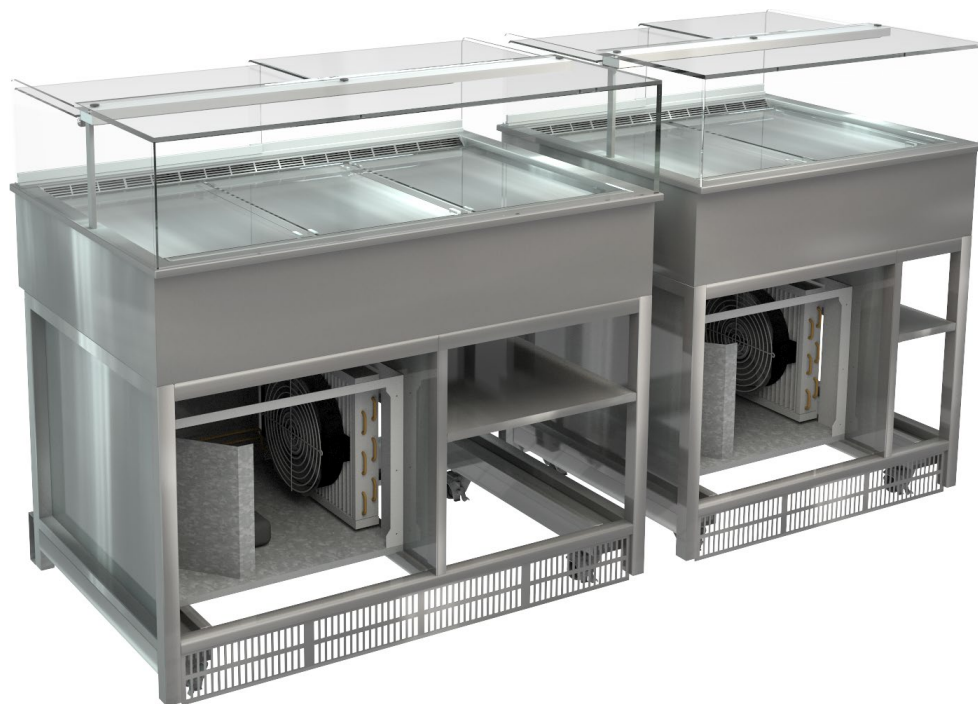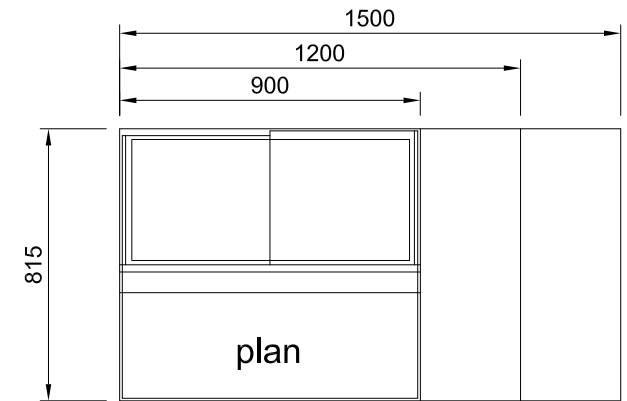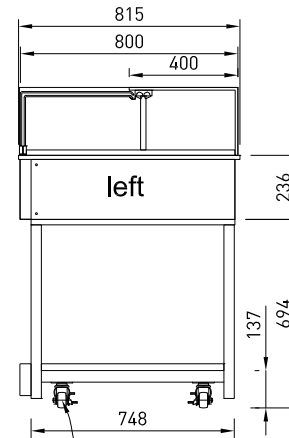

White gloss powder coated zintec panels with stainless base trim available as an optional extra

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			DISPLAY PLATES	DISPLAY PLATES SIZE	DISPLAY AREA	TEMP RANGE	POWER CORD LENGTH	FREQUENCY	REFRIGERANT	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING				
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											W X D	Sq.M	DEG C	LENGTH [MM]	DEPTH [MM]
LPRF9	900	815	1180	2	398 X 613	0.48	3-5	2200MM	50 HZ	134A	3.8 AMP	10AMP 3 PIN PLUG	220-240V	1000	910	1380	175	
LPRF12	1200	815	1180	3	365 X 613	0.67	3-5	2200MM	50 HZ	134A	4.3 AMP	10AMP 3 PIN PLUG	220-240V	1300	910	1380	223	
LPRF15	1500	815	1180	4	346 X 613	0.85	3-5	2200MM	50 HZ	134A	4.5 AMP	10AMP 3 PIN PLUG	220-240V	1600	910	1380	270	

