TOWER BTG HEATED

cossiga

HT

BTG HT6
BTG HT9
BTG HT12
BTG HT15

- Deck forced heating
- Single glazed
- Sliding rear doors
- Four adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Sliding front doors - optional

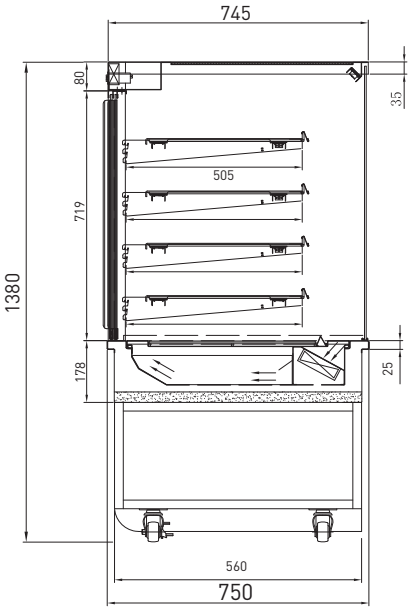

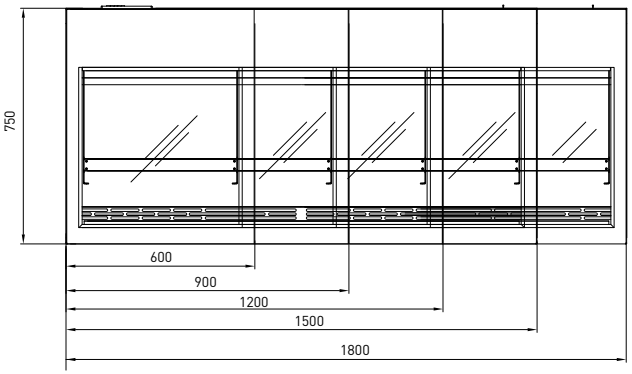

CABINET DIMENSIONS & SPECIFICATIONS

MODEL	CABINET			SHELVING	OPERATING TEMP	POWER CORD LENGTH	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M^2	INTERNAL VOLUME M^3	FREQUENCY	OPERATING CURRENT	CONNECTION	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]		DEG C		W X D	W X D	100MM UNITS					ELECTRICAL POWER CORD 2200MM		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGHT6	600	750	1380	4 + BASE	75-85	2200MM	490 X 445	540 x 510	100	1.14	0.29	50/60 HZ	5.41 AMP	10 AMP 3 PIN PLUG	220-240V	700	830	1550	118
BTGHT9	900	750	1380	4 + BASE	75-85	2200MM	790 X 445	840 x 510	168	1.83	0.45	50/60 HZ	7.45 AMP	10 AMP 3 PIN PLUG	220-240V	1000	830	1550	150
BTGHT12	1200	750	1380	4 + BASE	75-85	2200MM	1090 X 445	1140 x 510	255	2.52	0.60	50/60 HZ	9.56 AMP	10 AMP 3 PIN PLUG	220-240V	1300	830	1550	182
BTGHT15	1500	750	1380	4 + BASE	75-85	2200MM	1390 X 445	1440 x 510	355	3.20	0.75	50/60 HZ	11.61 AMP	15 AMP 3 PIN PLUG	220-240V	1600	830	1550	214

Maximum shelf load weight 15kg spread evenly

Date Modified: 29/03/22 Check website for latest version

Download C.A.D models or contact us on COSSIGA.COM

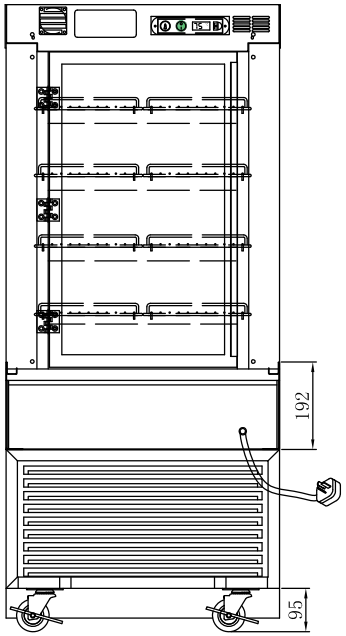
192
95

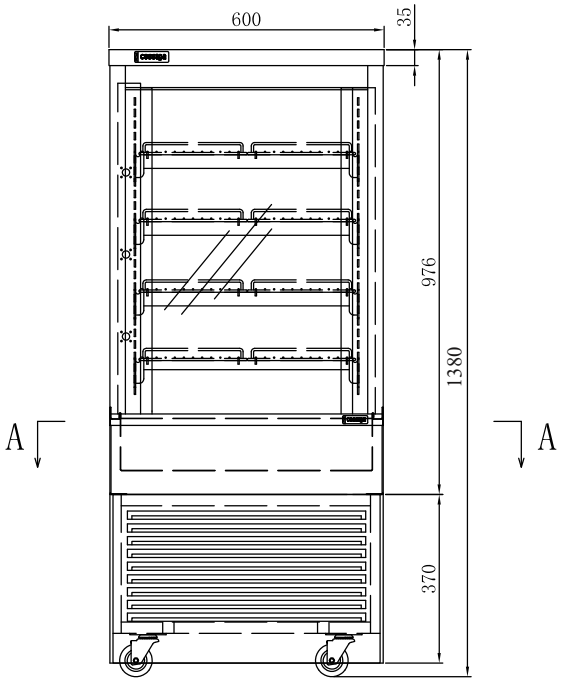
600
35
976
1380
370
A
A

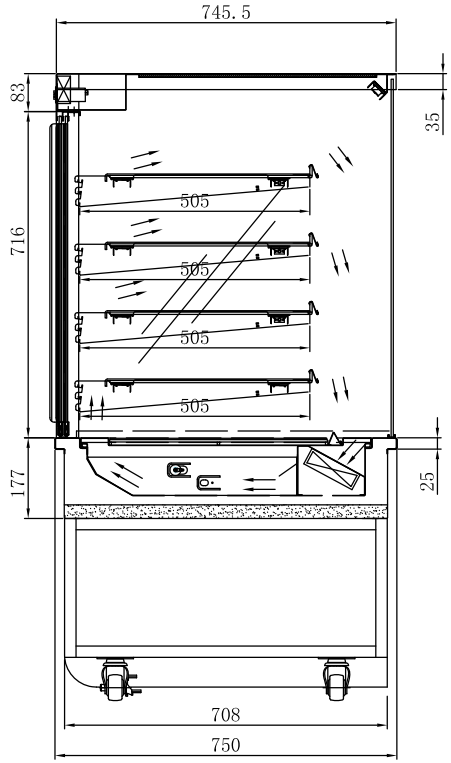
745.5
83
35
716
505
505
505
505
177
25
708
750

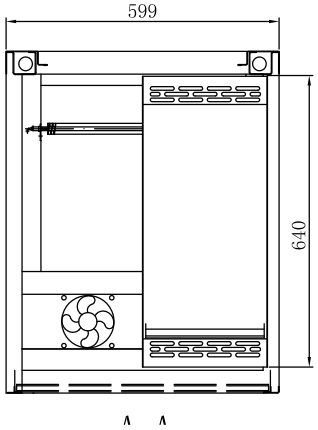
599
640

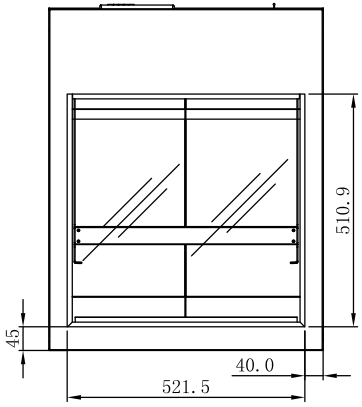
510.9
45
40.0
521.5

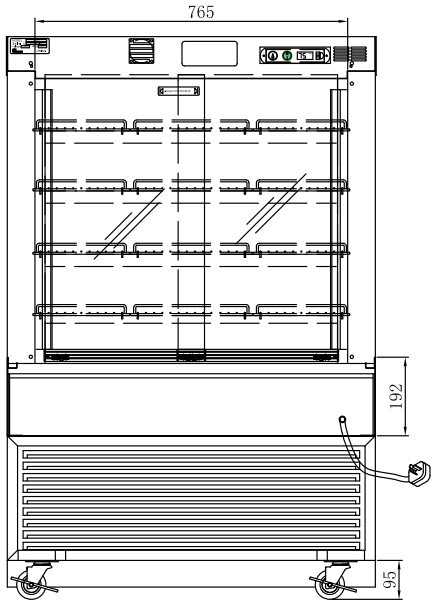

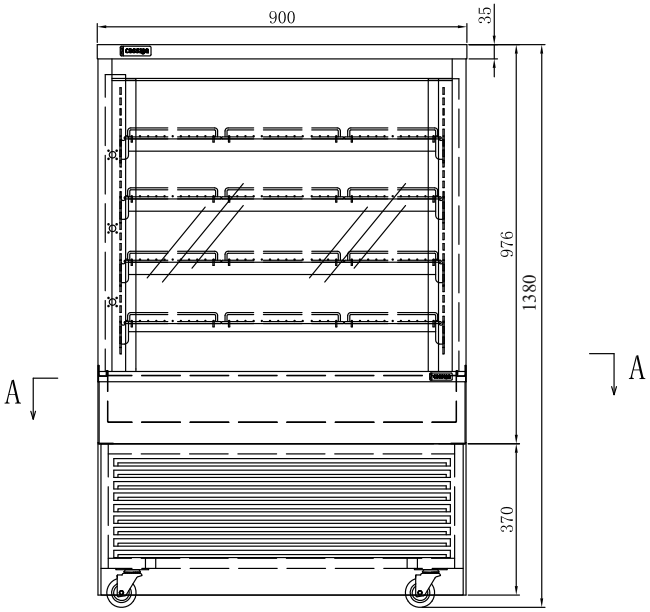

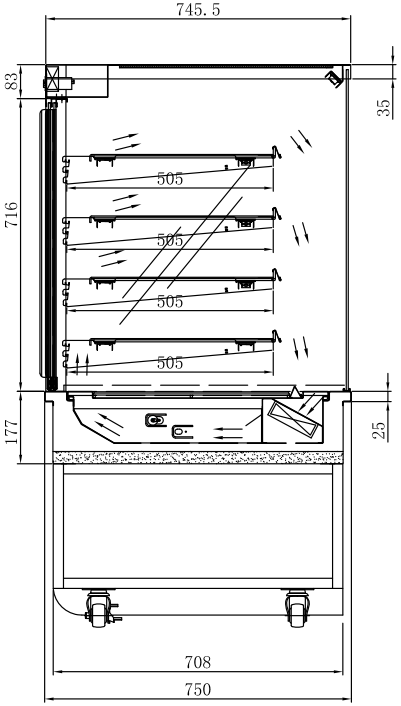

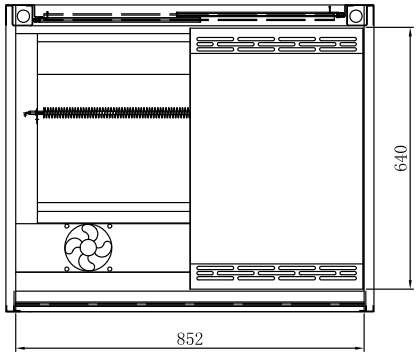

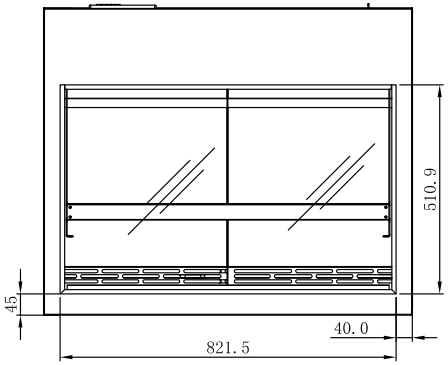

Download C.A.D models or contact us on COSSIGA.COM

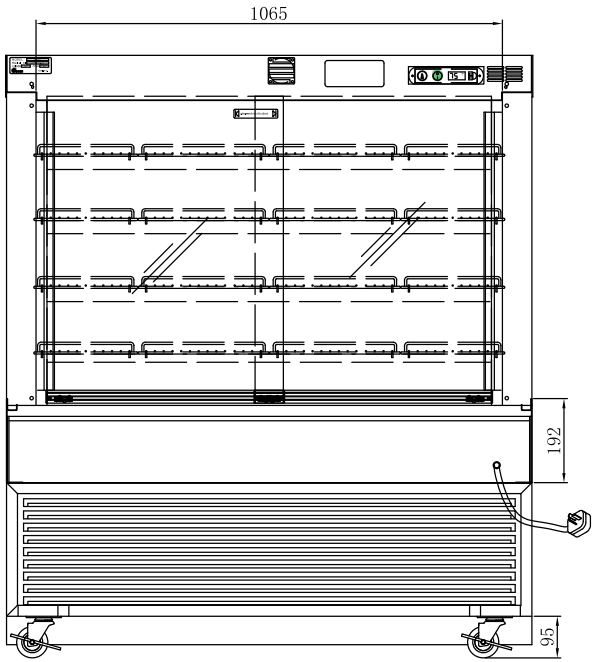
1065
192
95

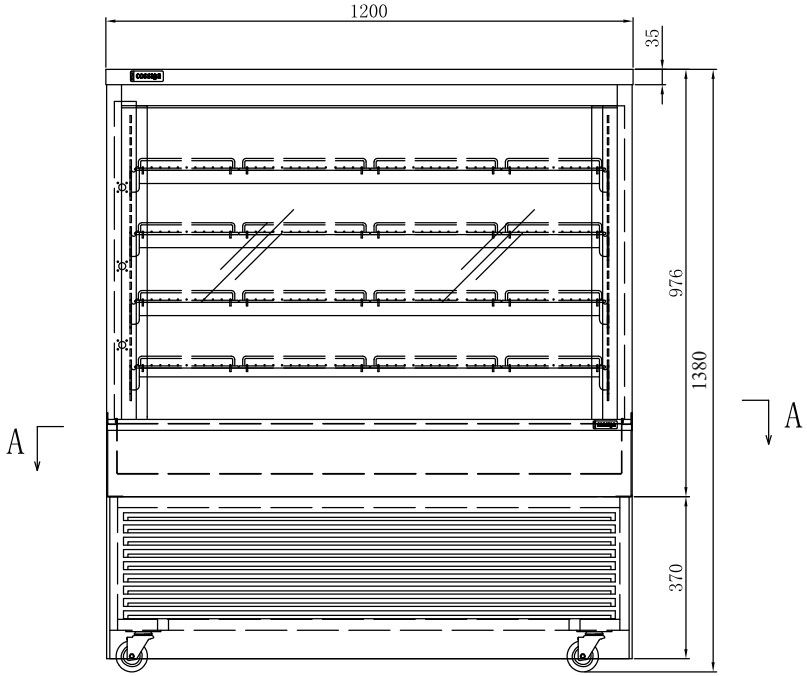
1200
35
976
1380
370
A
A

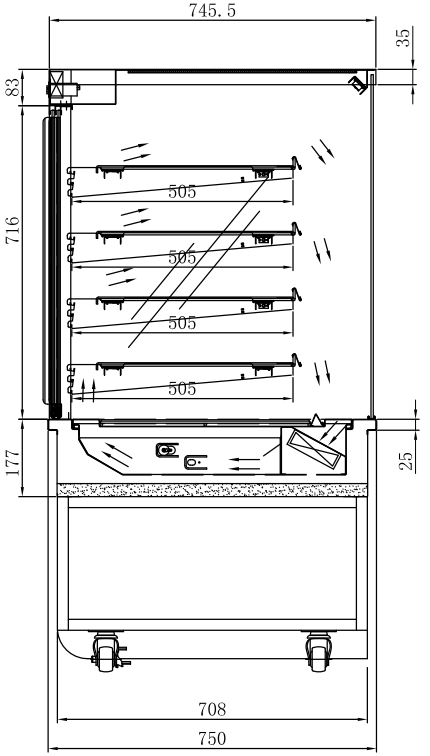
745.5
35
83
716
505
505
505
505
177
25
708
750

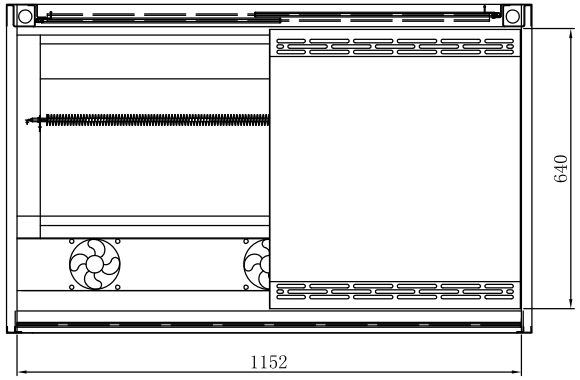
640
1152

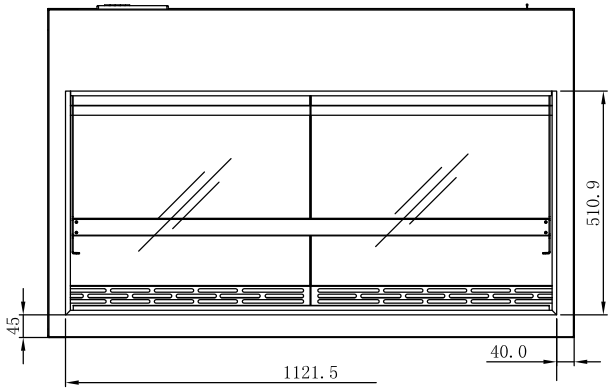
510.9
45
40.0
1121.5

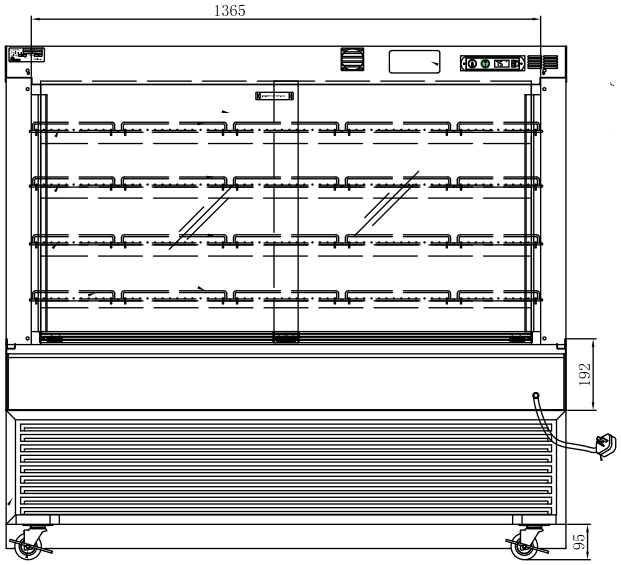
1365
192
95

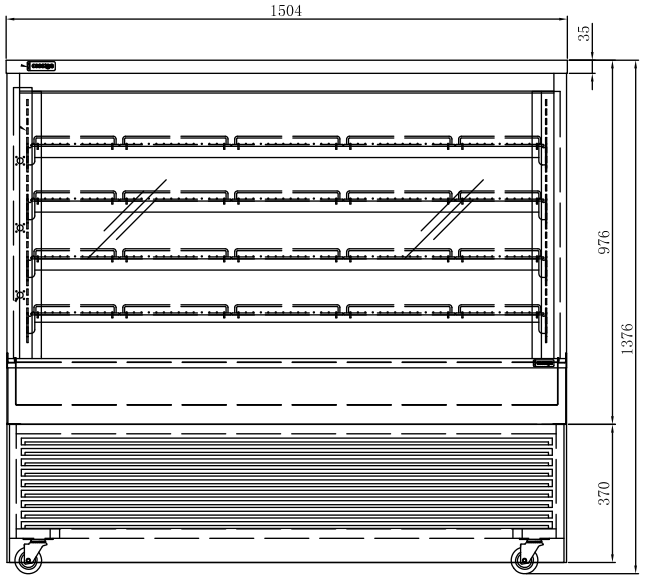
1504
35
976
1376
370

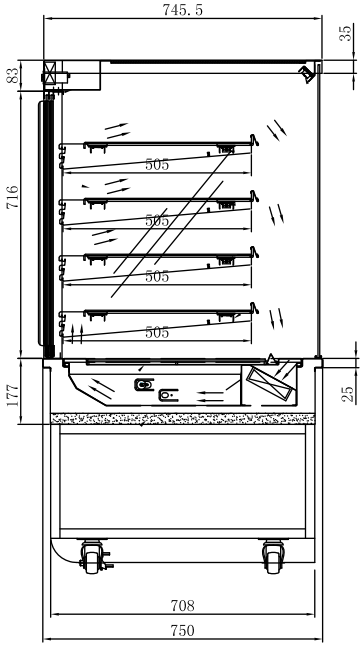
745.5
35
83
716
505
505
505
505
177
25
708
750

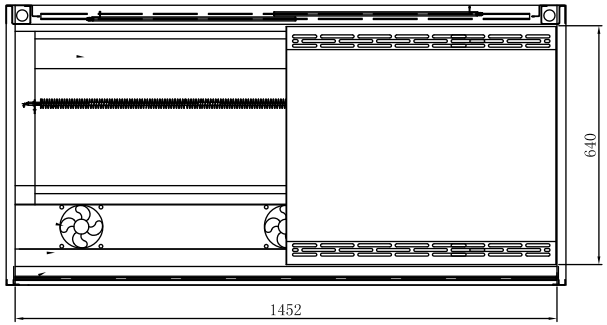
640
1452

A–A

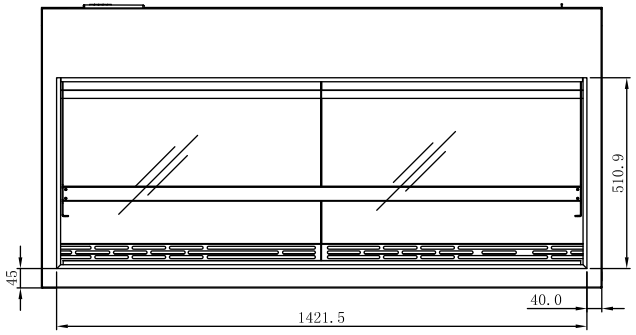
510.9
45
40.0
1421.5

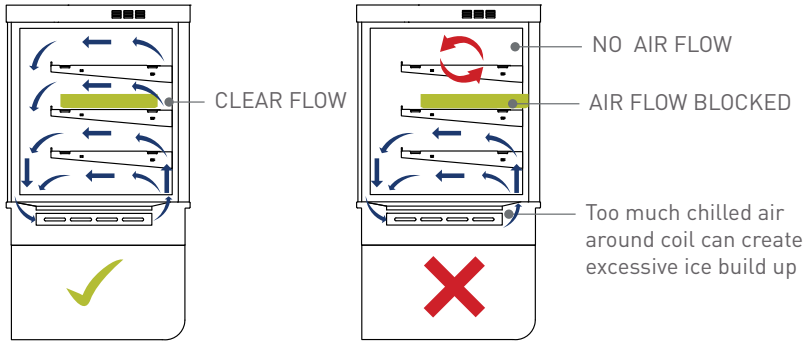

CORRECT AIRFLOW

IN CORRECT AIRFLOW

- Blocked air flow will retard operation on both HOT and COLD units
- Ensure trays or plates are not blocking air flow at rear

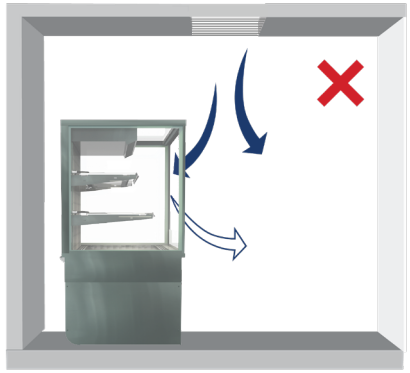

Mechanical airflow

Mechanical air flows, such as diffusers and fans can disturb the air curtain on open fronted units causing failure

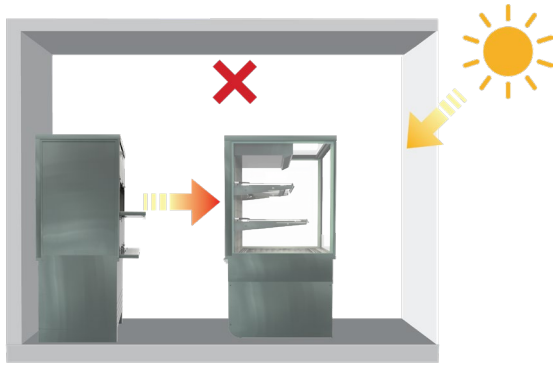

Environmental conditions

Heat from other equipment and natural conditions, such as direct sunlight straight on units, can cause cooling to fail and overload compressor

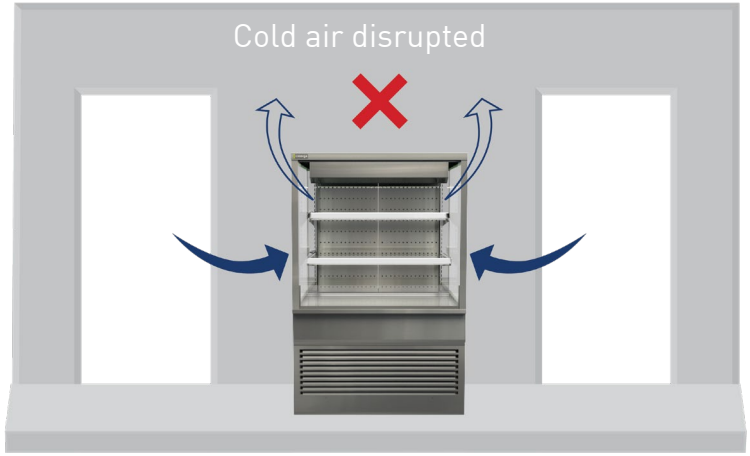

Locations to avoid

- Close to shop front exterior
- In an outside location
- In direct sunlight
- In a high wind
- Near any source producing excessive heat
- Service units more frequently in dusty or polluted areas

PLACED IN BENCH DETAIL

cossiga

Parts removed

Castors, front and side panels removed.
Rear panels / grill remain for personnel safety.

Dropped Into Benchtop

Unit is dropped in to hole cut in bench top and supported by font and rear flange of unit.

MODEL	CUT OUT SIZE
BTG6	615 X 720
BTG9	915 X 720
BTG12	1215 X 720
BTG15	1515 X 720

Placed Into Benchtop from rear

Unit is slid into custom built frame from rear and supported by the sides of the unit base frame. L shaped supports shown in red in this example.

COPS CLIP ON PANEL SYSTEM

cossiga

Create your own panels

Supplied by customer

Easy install option to eliminate a nib wall
Simply roll in and clip on

Clip on panels can be in up to 16 mm MDF
Meltica finish or similar.

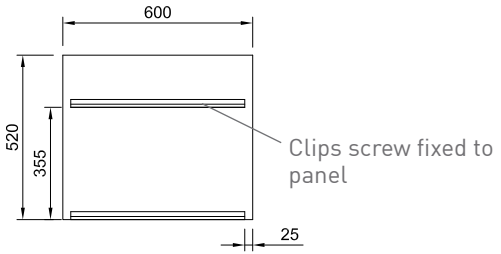

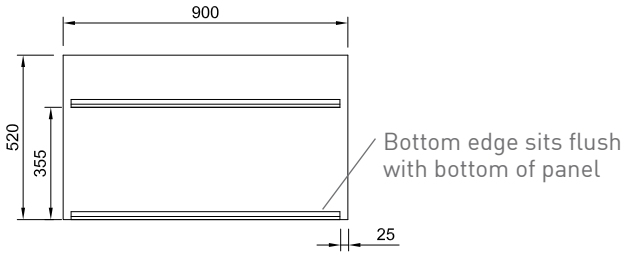

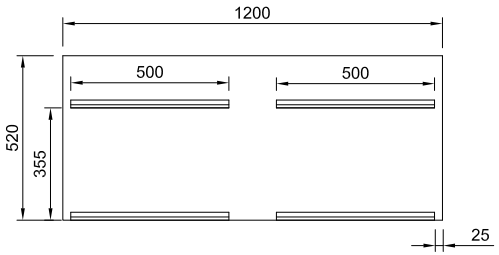

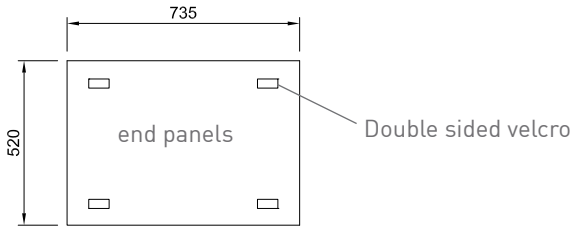

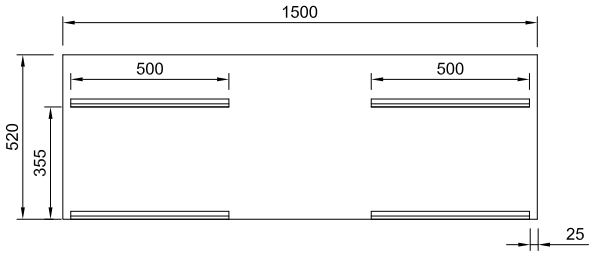

Integrated Clip System -
Bracket fixing to joinery panels

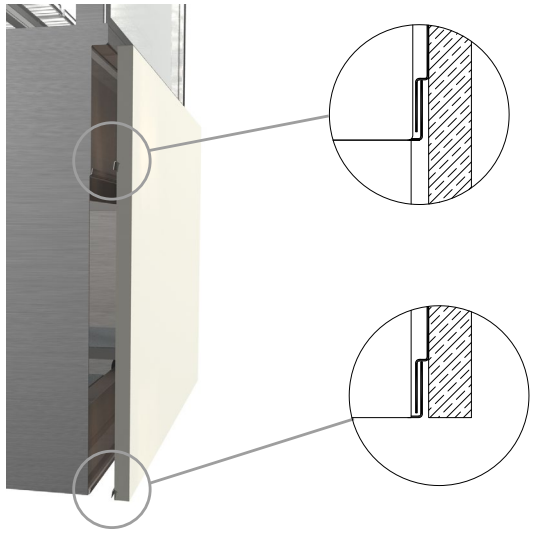

SELF SERVICE SYSTEM

Each unit is self contained
Roll-in - Roll-out
Install in minutes
No on site joinery work required
Ease of cleaning and servicing
Mobile and flexible
Easy to upgrade front panel design
Custom branding strip
Rear service or against wall
All parts as optional component kits
Ideal solution for temporary events

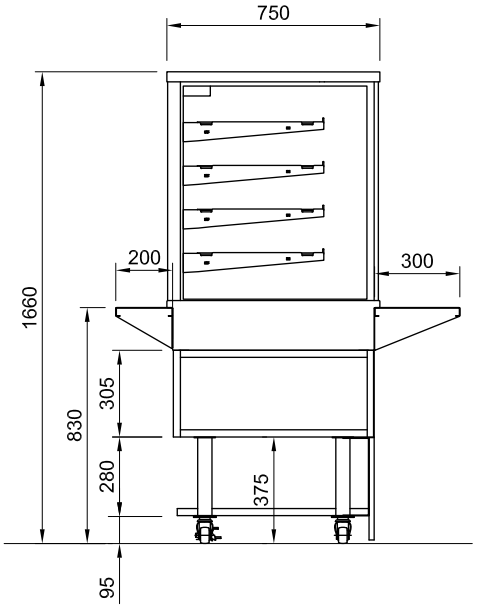

Optional bottom shelf kit for chilled units
Ensure chilled units are kept well ventilated

Vent required through front panel

Optional bottom meltica shelf kit - BY OTHERS

Optional rear loading shelf kit 200mm deep

Optional bottom meltica shelf kit - BY OTHERS

BTG ACCESSORIES

cossiga

Top Mounted Controller Panel

For against wall installations
Sold individually

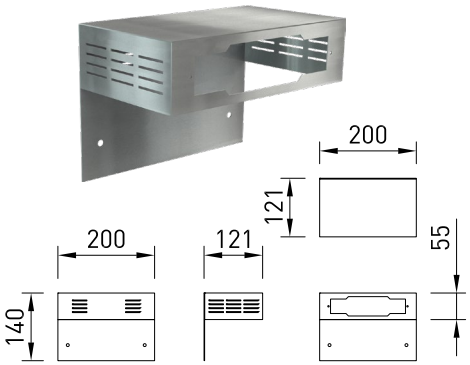

Base Tray - Heated Units

Stainless Steel
For heated units
Sold in pairs

Tong Holder

Stainless Steel
Drop into counter tray race
Sold individually

Price Tabs

Stainless Steel
Write on with marker or adhesive tape
Measure 60mm x 30mm
Sold in packs of 20



Bag Holder



Front and Rear Work Shelves

Stainless Steel
Sold individually

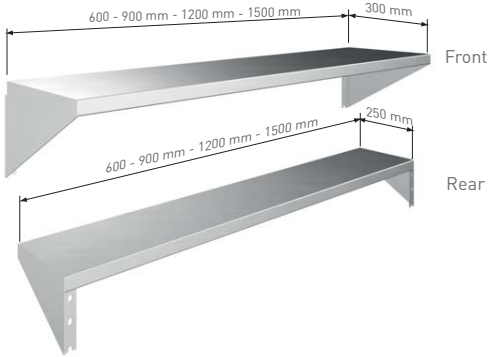

Castor Extension Kit

Increases cabinet height to 1660mm

Set of four, uses existing castors, includes fixing bolts and washers

Humidity Dish

Stainless Steel
Perforated lid is removable

Download C.A.D models or contact us on COSSIGA.COM

TICKET STRIP

cossiga

Shelf with ticket strip attached

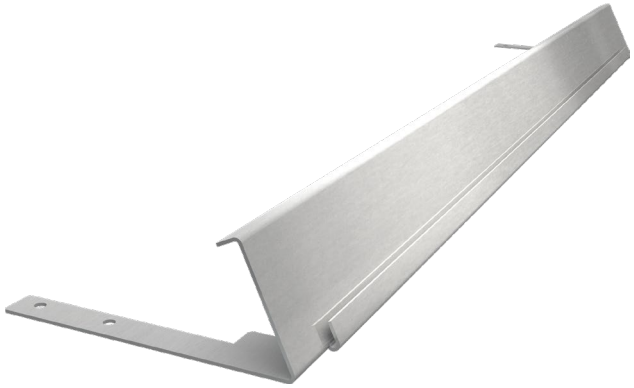

Ticket Strip

Stainless Steel
Attaches to shelf frame



End Profile

Lengths

CABINET LENGTH MM	TICKET STRIP LENGTH
600	475
900	775
1200	1075
1500	1375
1800	810 X 2

Price Tabs

Stainless Steel
Write on with marker or adhesive tape
Measure 60mm x 30mm
Sold in packs of 20



Download C.A.D models or contact us on COSSIGA.COM

BLOCKS
WORK AREAS
BEHIND
UNITS

Mirror film adhered to
inside of rear door glass

ADDS
DEPTH
TO YOUR
DISPLAYS

MIRROR FILM

- Applied to the inside glass rear doors
- Suitable for heated and chilled units

Pie Trays

Stainless Steel Construction

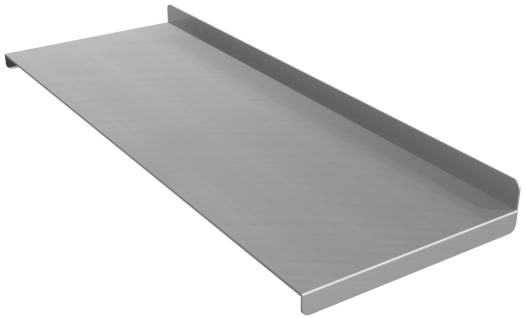

PIE TRAYS					
MODEL	NO. OF SHELF TRAYS	WIDTH MM	DEPTH MM	PER SHELF	TOTAL
BTGHT6	4 PER SHELF	120	445	4	16
BTGHT9	6 PER SHELF	120	445	6	24
BTGHT12	9 PER SHELF	120	445	9	36
BTGHT15	12 PER SHELF	120	445	12	48

Gastronorm Pan Kit

Allows you to merchandise multiple hot food choices in one cabinet

Expand the use of your heated cabinet with this Gastronorm Pan Kit with an angled frame that accepts 1/2 Gastro pan 65mm deep (supplied)
Holds fried foods and bulky products like chicken, lasagne, toppers, roast potatoes, etc.

Remove bottom shlef for optimum viewing

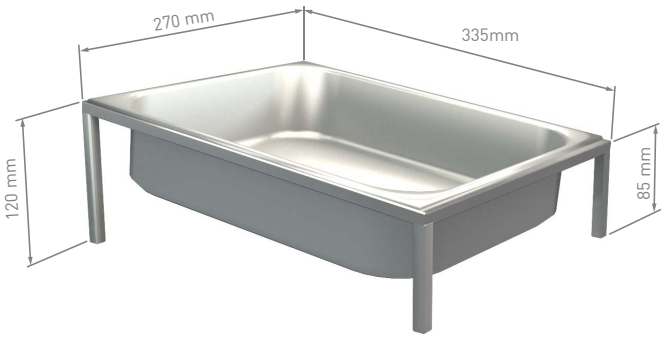

Stainless steel construction
angled display view

1 Rack + 1/2 Pan

One rack with half size pan



HT6 - 2 Pans



HT9 - 3 Pans

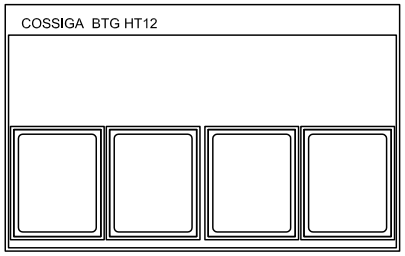

HT12 - 4 Pans

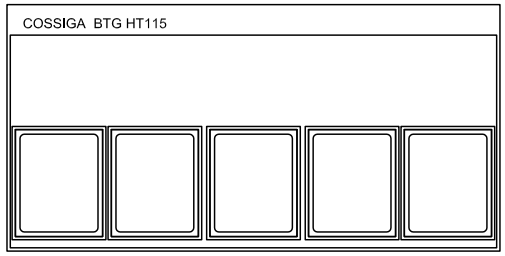

HT15 - 5 Pans

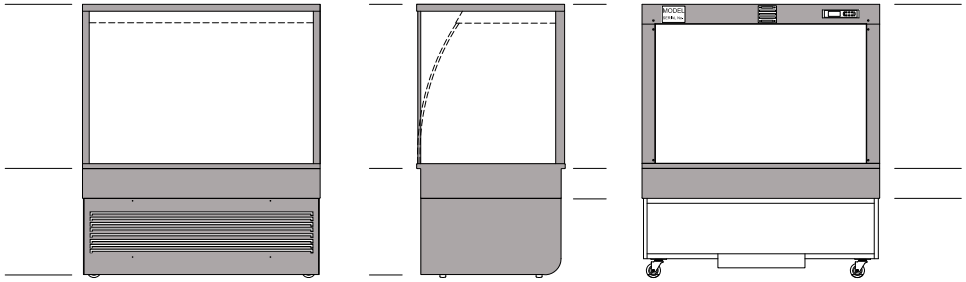

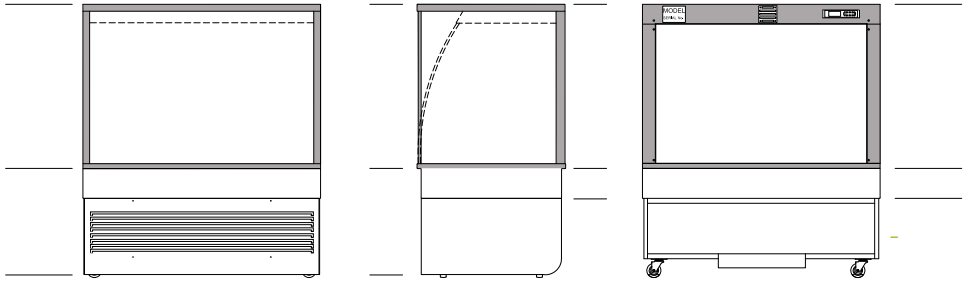

FREE STANDING - CURVED OR SQUARE

all exterior visible areas covered

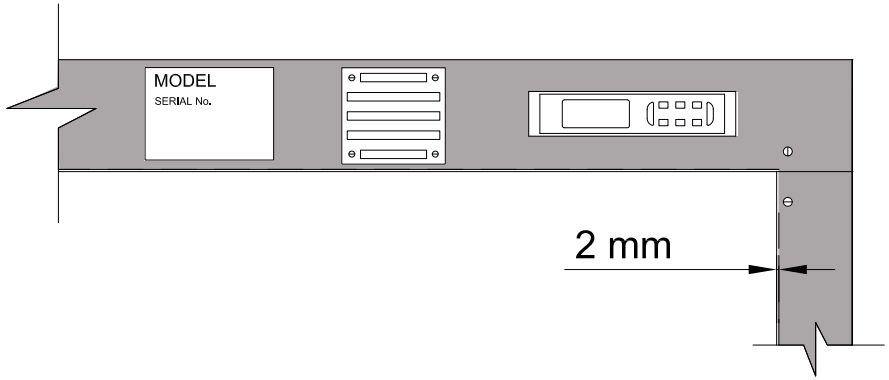

2mm gap left around rear frame

Rear of units cut around serial number plate, exhaust fan and controller

all exterior top visible areas covered

WRAP TRIMMING