

TTGRF9




PRODUCT FEATURES

- Solid glass front
- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled sliding rear doors
- Deck forced refrigeration
- Four adjustable shelves -flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- 1500 mm high

Front doors not available for this model

Maximum shelf load weight 15kg spread evenly
All units rear venting

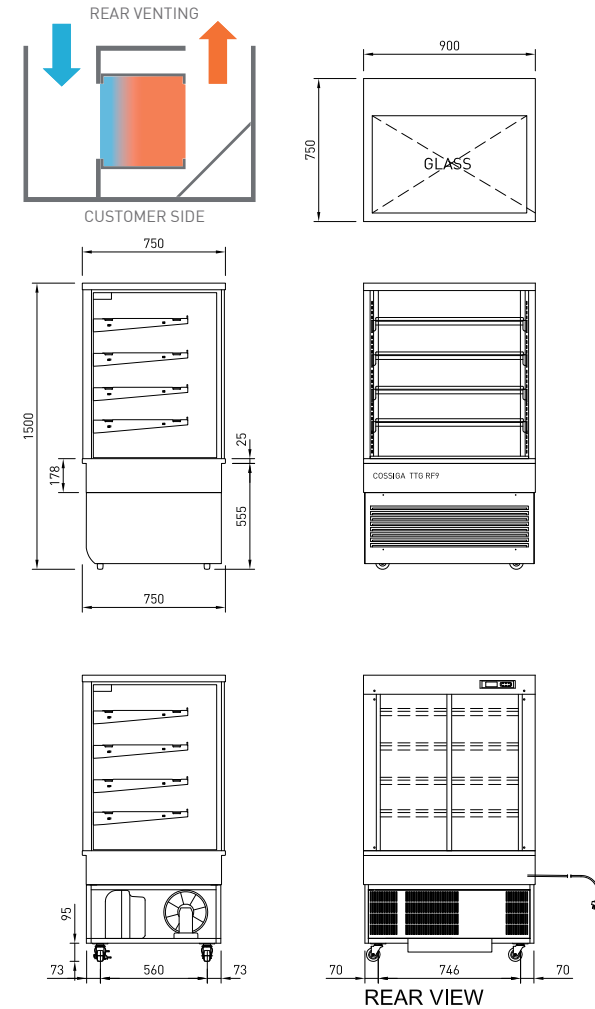

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING WEIGHT KG | SHELVING 4 + BASE | OPERATING TEMP DEG C | SHELF | | TOTAL FOOD 100MM UNITS | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY | REFRIGERANT | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | | |
|--------|-------------|------------|-------------|--------------------|-------------------|----------------------|-----------|----------|------------------------|------------------------|--------------------------------|-----------|-------------|-------|-----|---|------------|----------|---------------------|------------|-------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | W X D | W X D | | | | | | KWH | AMP | NZ/AUS 10 AMP | UK 13 AMP | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| TTGRF9 | 900 | 750 | 1500 | 246 | 4 + BASE | 3-5 | 790 X 445 | 845 x515 | 168 | 1.84 | 0.52 | 50/60 HZ | R290 | 1.38 | 6.0 | 3 PIN PLUG | 3 PIN PLUG | 220-240V | 1000 | 830 | 1670 | 252 |


TTGRF12



PRODUCT FEATURES

- Solid glass front
 - Heated double glazed glass top, sides and front
 - Heated rear sub frame
 - Argon filled sliding rear doors
 - Deck forced refrigeration
 - Four adjustable shelves -flat or angled
 - Ticket strips on shelves and base
 - Under shelf and canopy LED lights
 - Integral condenser
 - 1500 mm high
- Front doors not available for this model

Maximum shelf load weight 15kg spread evenly
All units rear venting

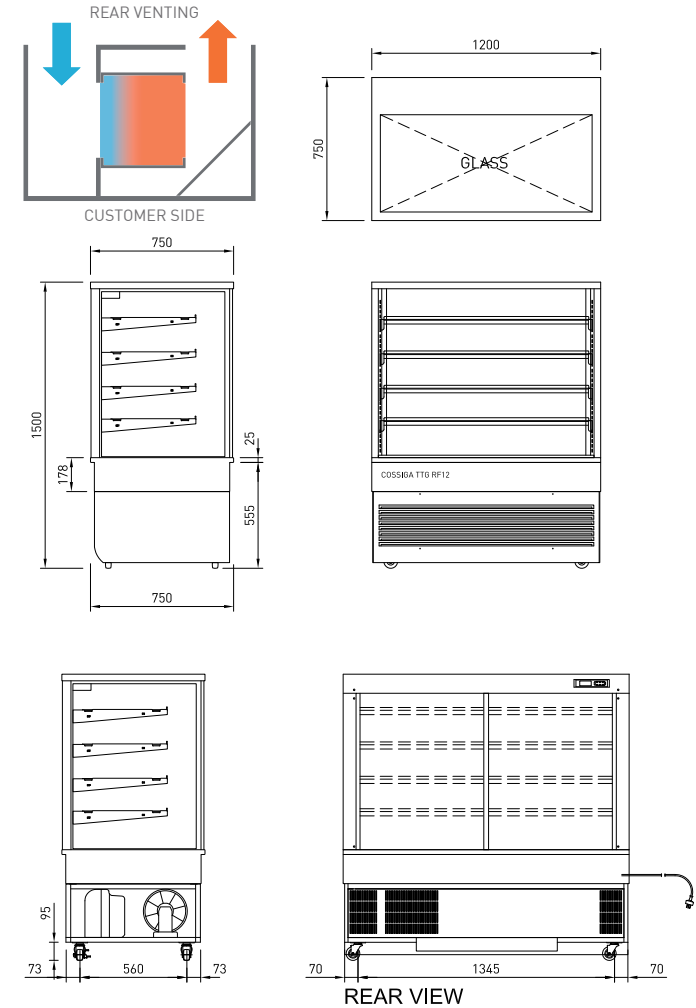

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

| MODEL | CABINET | | | SHELVING WEIGHT KG | SHELVING 4 + BASE | OPERATING TEMP DEG C | SHELF W X D | BASE TRAY W X D | TOTAL FOOD 100MM UNITS | DISPLAY M ² | INTERNAL VOLUME M ³ | FREQUENCY | REFRIGERANT | POWER | | CONNECTION ELECTRICAL POWER CORD 2200MM | | VOLTAGE | PACKED FOR SHIPPING | | | |
|---------|-------------|------------|-------------|--------------------|-------------------|----------------------|-------------|-----------------|------------------------|------------------------|--------------------------------|-----------|-------------|-------|-----|---|------------|----------|---------------------|------------|-------------|--------|
| | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | | | | | | | | | | | KWH | AMP | NZ/AUS 10 AMP | UK 13 AMP | | LENGTH [MM] | DEPTH [MM] | HEIGHT [MM] | WEIGHT |
| TTGRF12 | 1200 | 750 | 1500 | 300 | 4 + BASE | 3-5 | 1090 X 445 | 1145 X 515 | 275 | 2.52 | 0.69 | 50/60 HZ | R290 | 1.61 | 7.0 | 3 PIN PLUG | 3 PIN PLUG | 220-240V | 1300 | 830 | 1670 | 306 |