


## TTGRF9



### PRODUCT FEATURES

- Solid glass front
  - Heated double glazed glass top, sides and front
  - Heated rear sub frame
  - Argon filled sliding rear doors
  - Deck forced refrigeration
  - Four adjustable shelves -flat or angled
  - Ticket strips on shelves and base
  - Under shelf and canopy LED lights
  - Integral condenser
  - 1500 mm high
- Front doors not available for this model

Maximum shelf load weight 15kg spread evenly  
All units rear venting

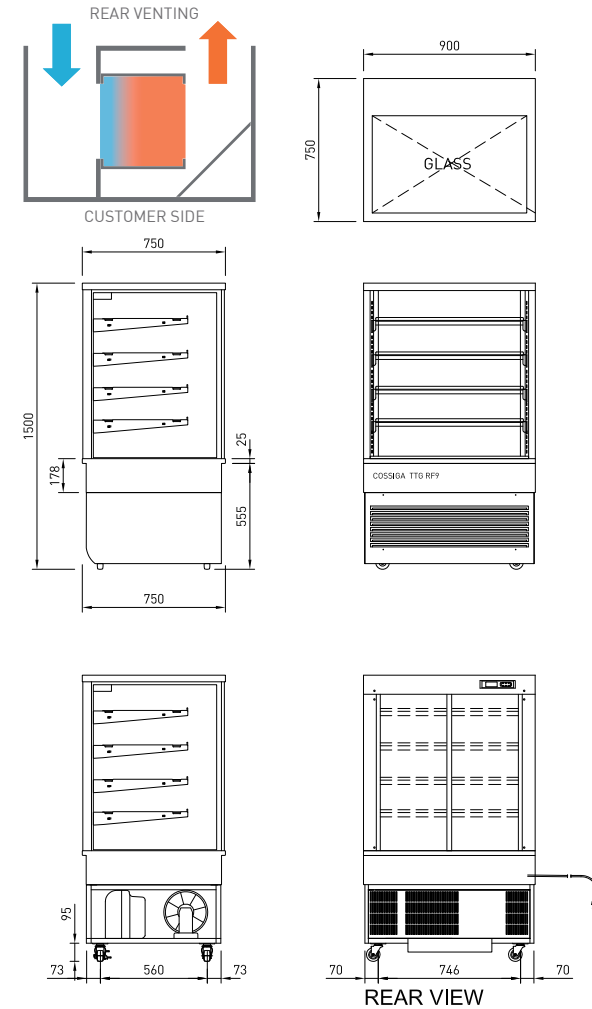

### CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF		TOTAL FOOD 100MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]				W X D	W X D						KWH	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF9	900	750	1500	246	4 + BASE	3-5	790 X 445	845 x 515	168	1.84	0.52	50/60 HZ	R290	1.38	6.0	3 PIN PLUG	3 PIN PLUG	220-240V	1000	830	1670	252

TTGRF12




## PRODUCT FEATURES

- Solid glass front
- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled sliding rear doors
- Deck forced refrigeration
- Four adjustable shelves -flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- 1500 mm high

Front doors not available for this model

Maximum shelf load weight 15kg spread evenly  
All units rear venting

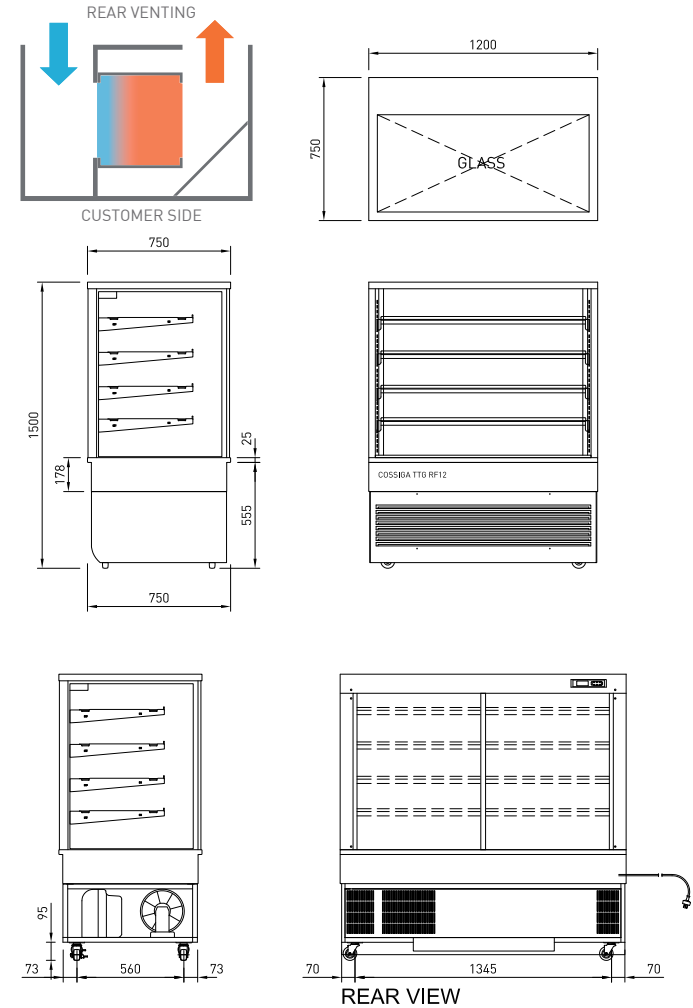

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 4 + BASE	OPERATING TEMP DEG C	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY 50/60 HZ	REFRIGERANT R290	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		PACKED FOR SHIPPING				
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KWH	AMP	NZ/AUS 10 AMP 3 PIN PLUG	UK 13 AMP 3 PIN PLUG	VOLTAGE 220-240V	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
TTGRF12	1200	750	1500	300	4 + BASE	3-5	1090 X 445	1145 X 515	275	2.52	0.69	50/60 HZ	R290	1.61	7.0	3 PIN PLUG	3 PIN PLUG	220-240V	1300	830	1670	306