


LS SQUARE GANTRY ASSEMBLED


- When using lugs a white washer is to be placed on the inside of glass - between the structure and the glass. No white washer is required between lug and glass.
- Lugs should be screwed in finger tight so as not to damage glass.
- There are two lug lengths, short and long. Short lugs are used only for the rear top door track.

EXPLODED PARTS DIAGRAM

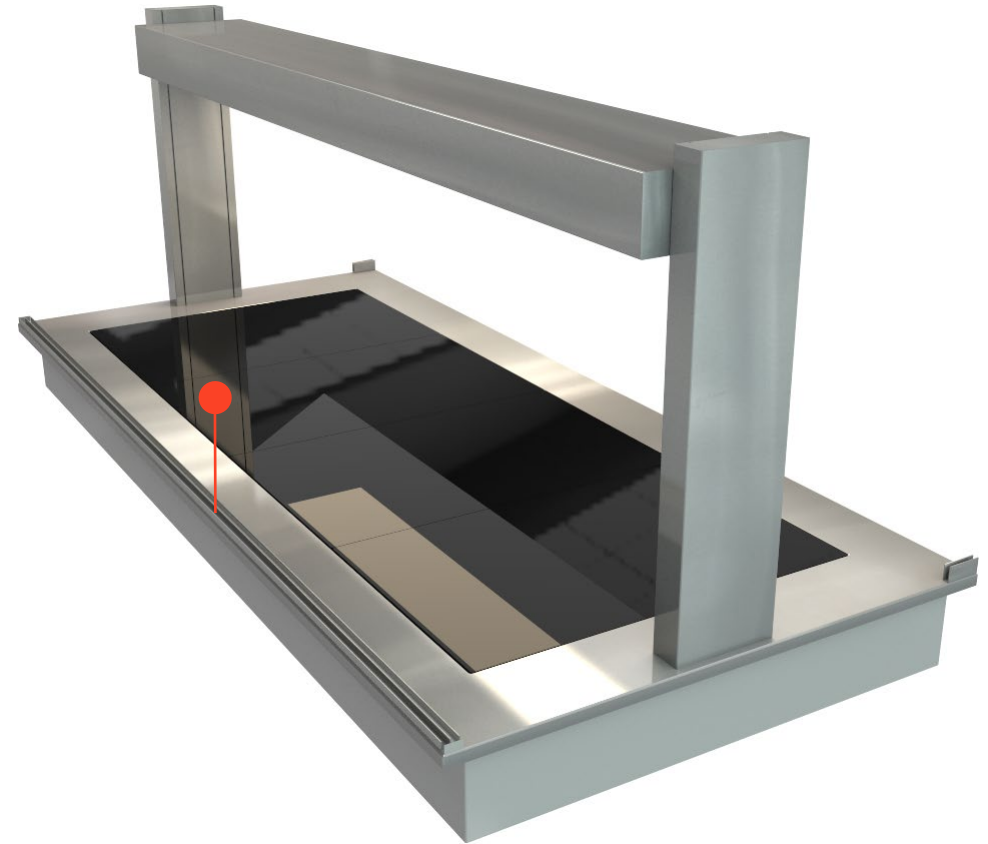


1. Put the two side glass U channel holder pieces on each side line up with front and side edges. This is also a guide for front glass track.

2. Position rear bottom door track. Remove double sided tape and stick down.

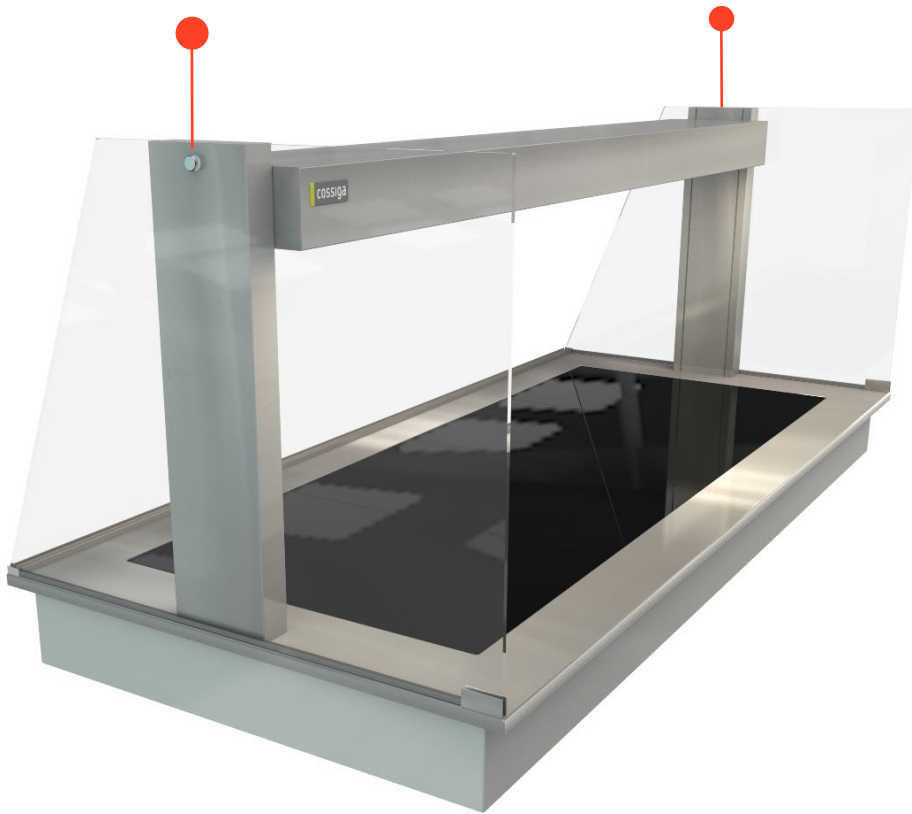


3. Position side glass. Use plastic U cap strip on the bottom of the glass. Screw in lugs placing a white rubber washer on the inside of glass.

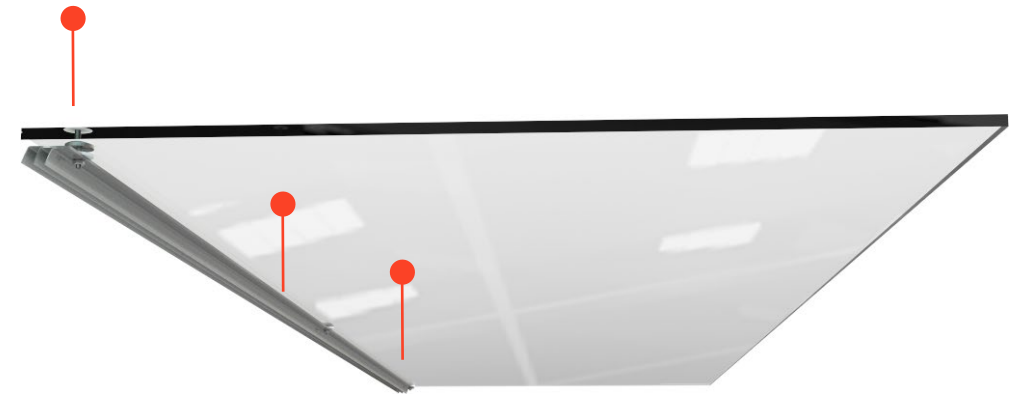


- Short type lug
- Glass
- White Washer
- Top track
- Metal washer
- Nut


4. Attach rear top door track to top glass using the short type lugs. Place white washer between glass and track. Use small metal washer and nut. Tighten to finger tight.

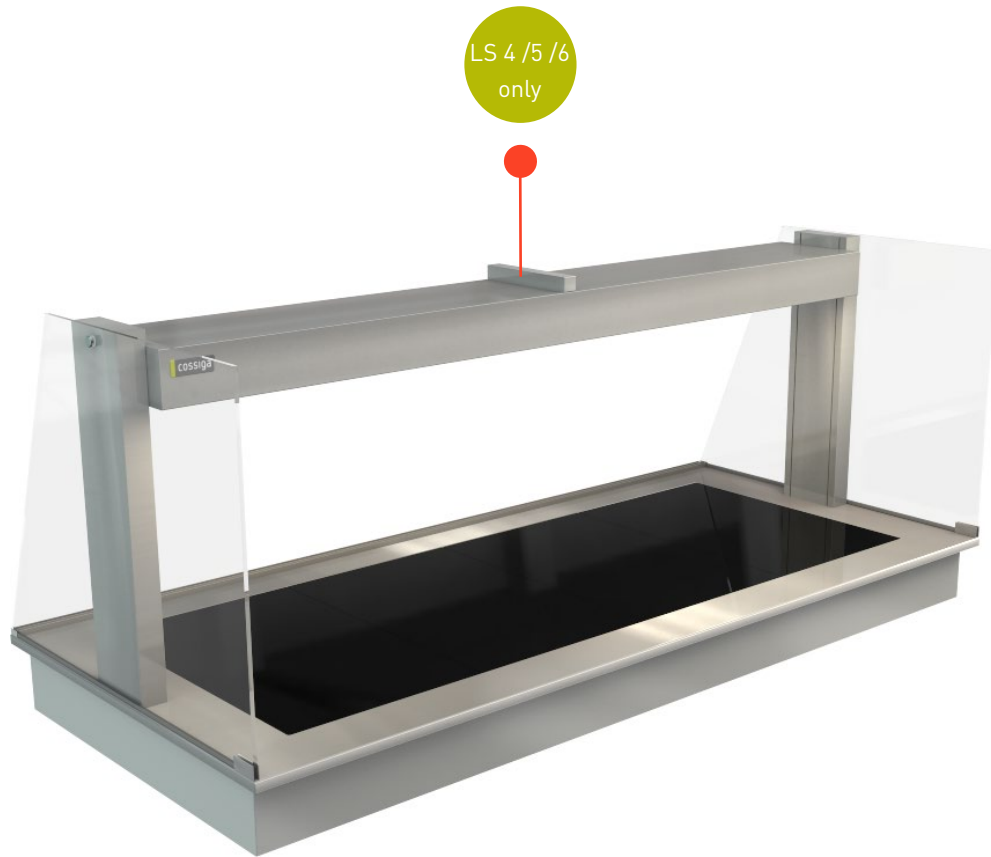

5. **Note:** For LS 4 /5 /6 units fit the top glass support bar in the centre and on top of the light box. This is fixed with the double sided tape.

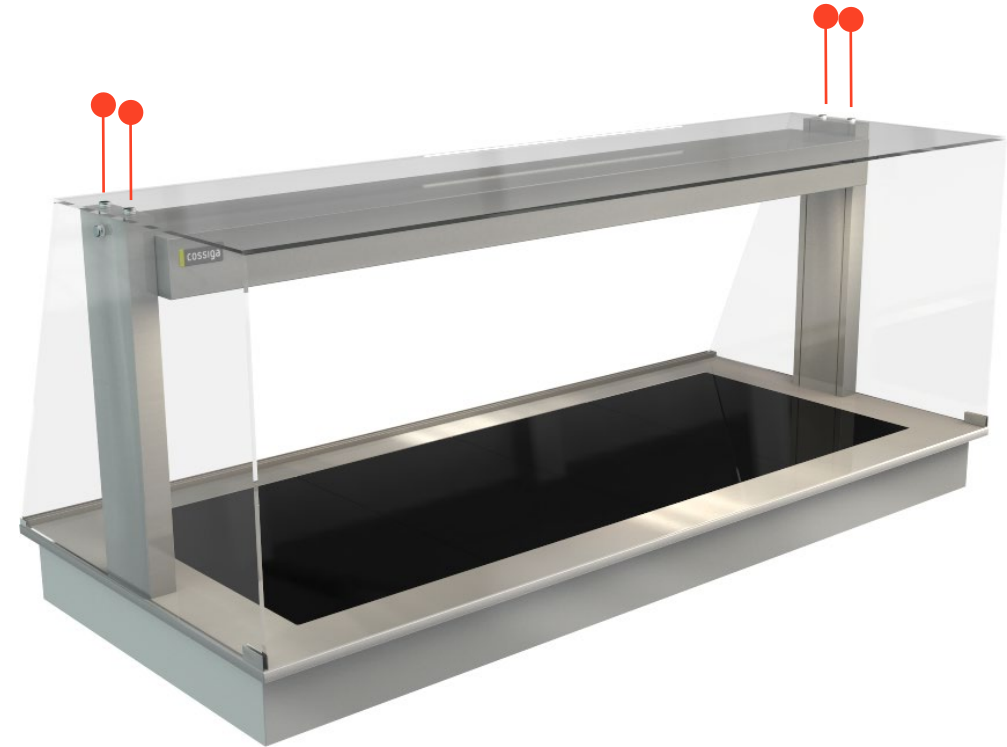


6. Position top glass. Screw in lugs on top placing a white rubber washer on the inside of glass.

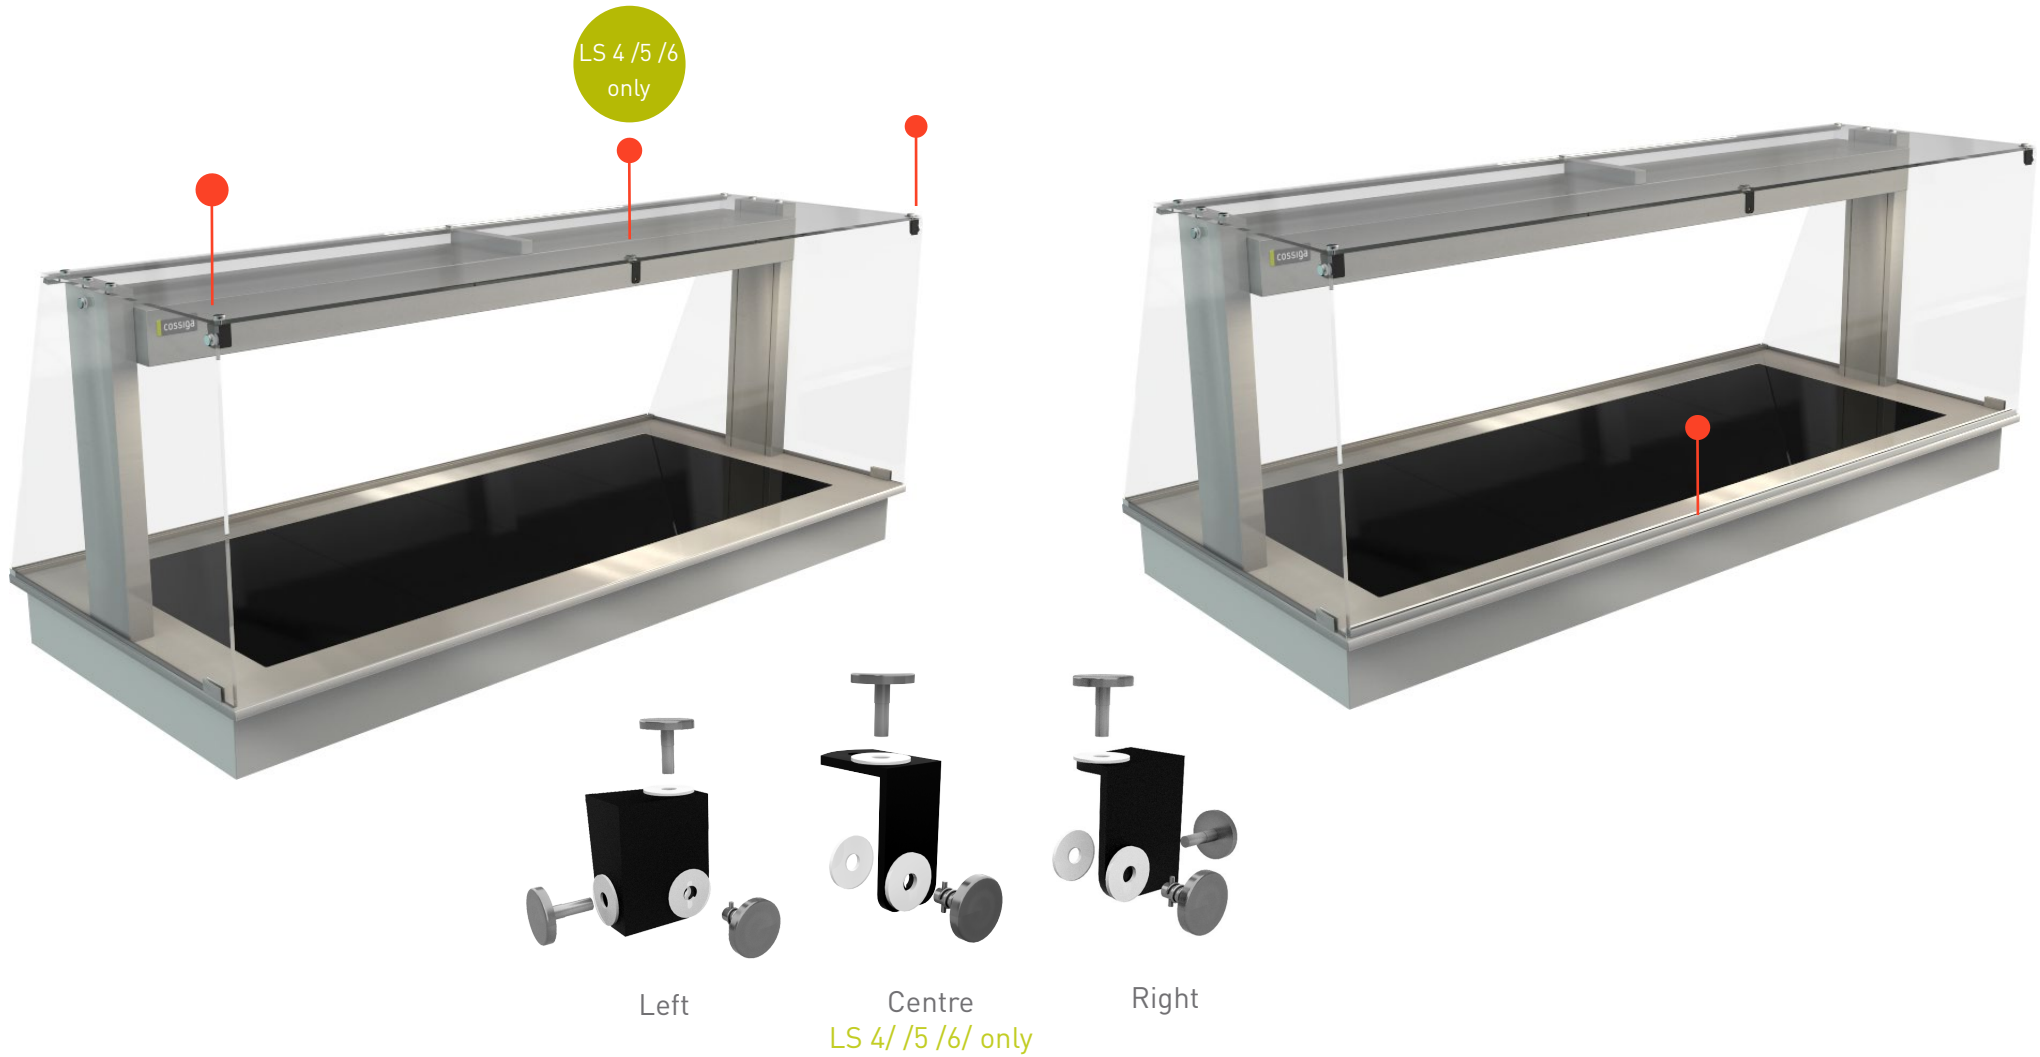


7. Position black corner holders. Connect to top and side glass. There is a left and a right holder. For LS 4 /5 /6 units place the front glass center holder in the middle of the top glass.

8. Position front track - same method as rear track. Remove double sided tape and stick down.

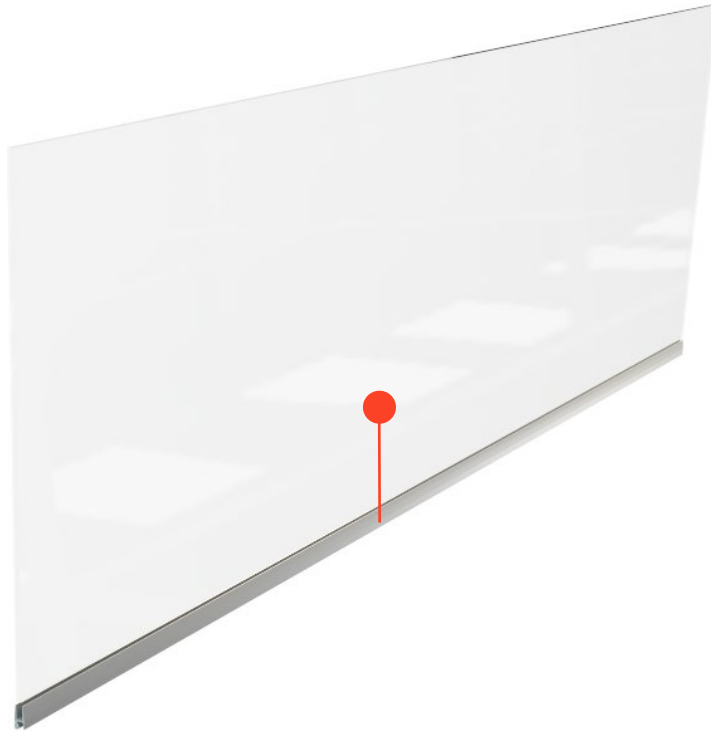

9.


Place small square clear plastic pieces onto front glass. Insert front glass into front channel.

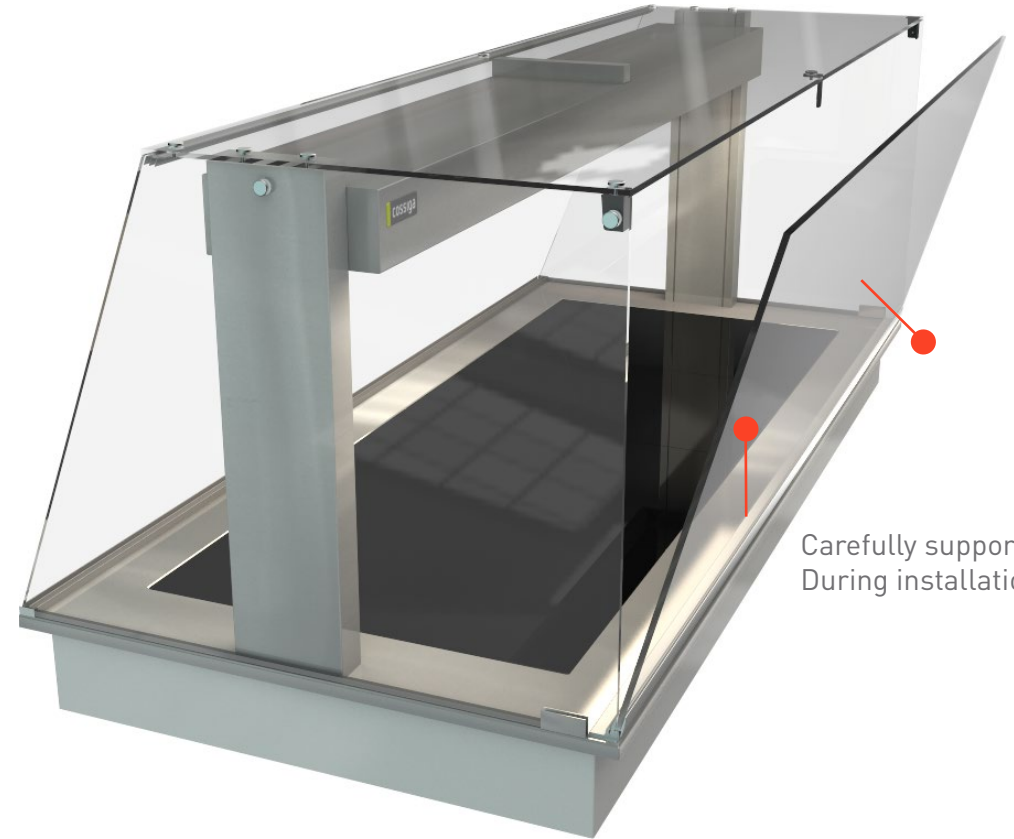

Carefully support glass During installation.

10.

Lift front glass and place in front track. The front glass should be able to pivot forwards and backwards - roughly on 45 degree angle.

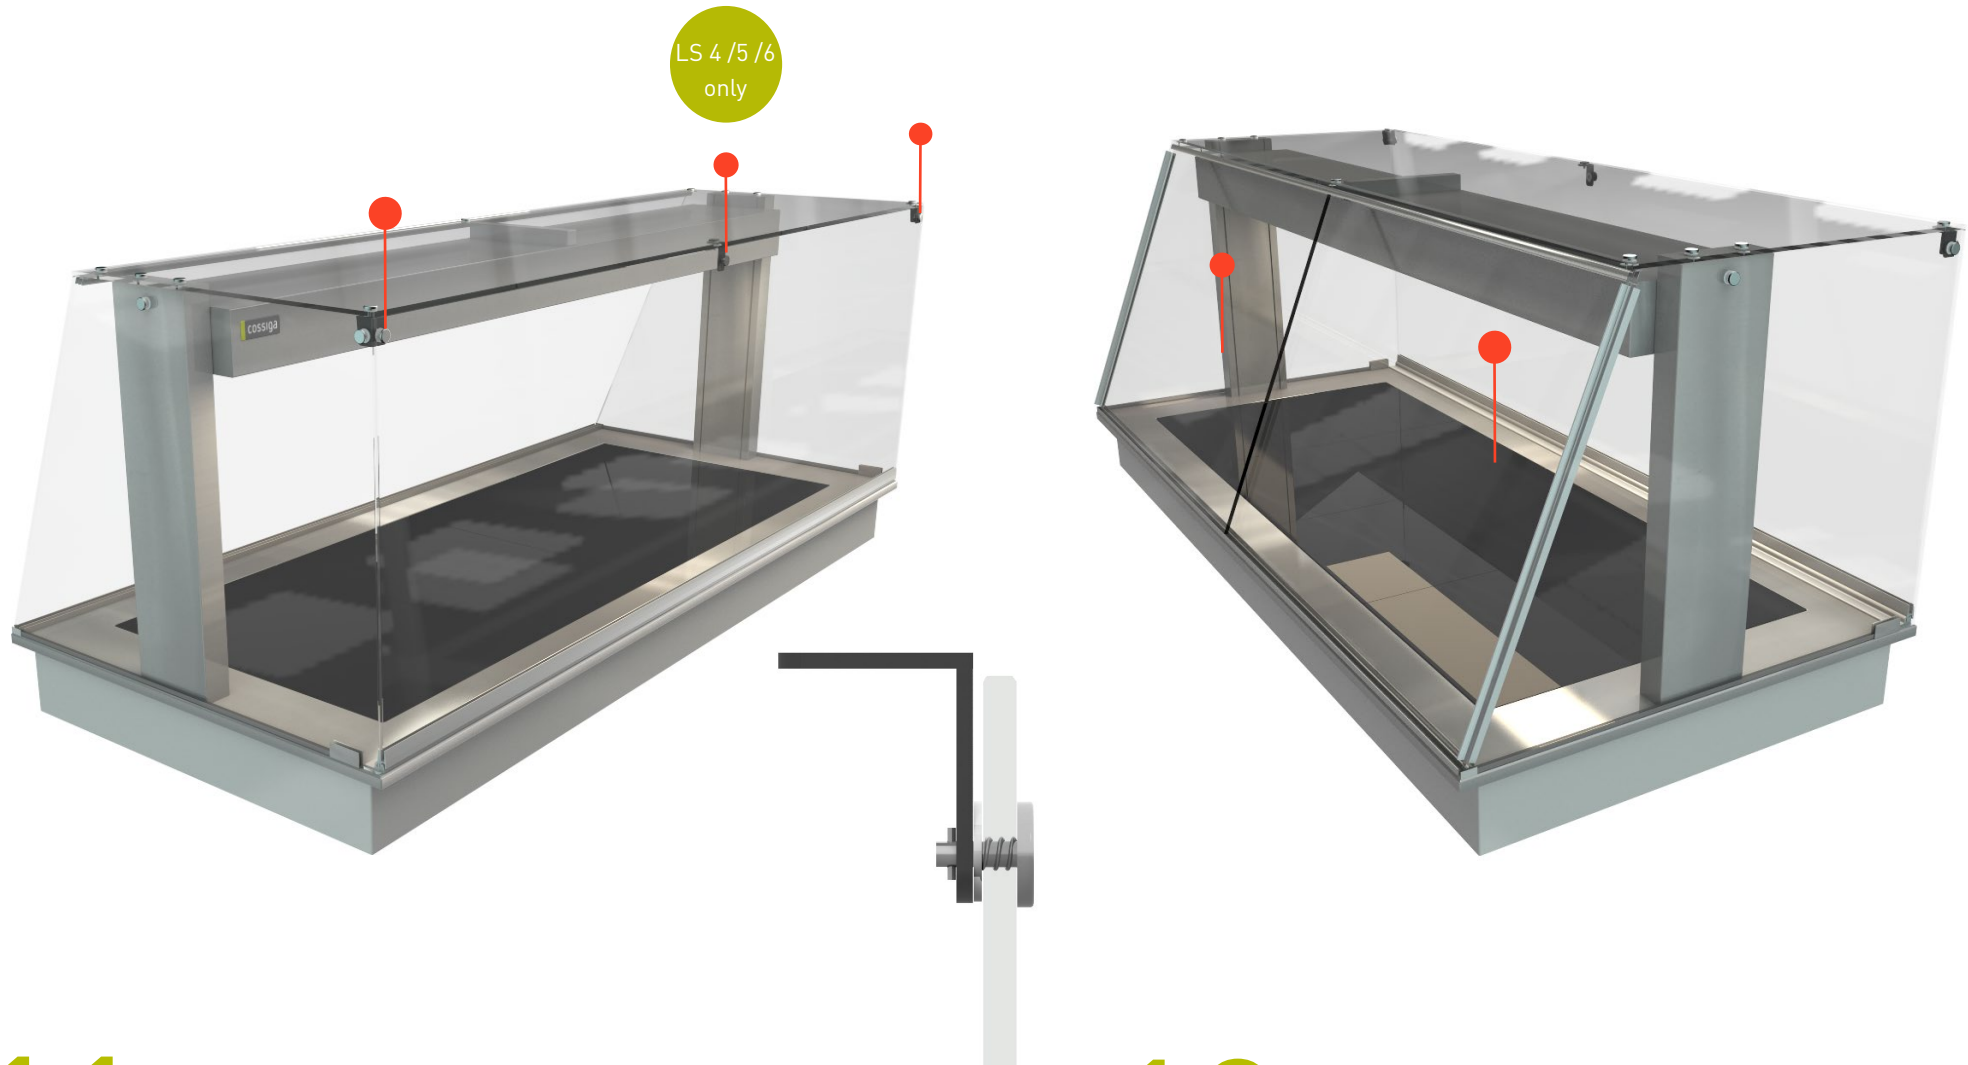

11.

Front glass needs to be fully upright, then locking spring lugs are inserted to secure. Place a white washer between bracket and the glass.

12.

Place perspex doors in tracks..