


1. Unscrew and remove the base panel

LSCM Glass & Heater replacement



2. Remove the insulation

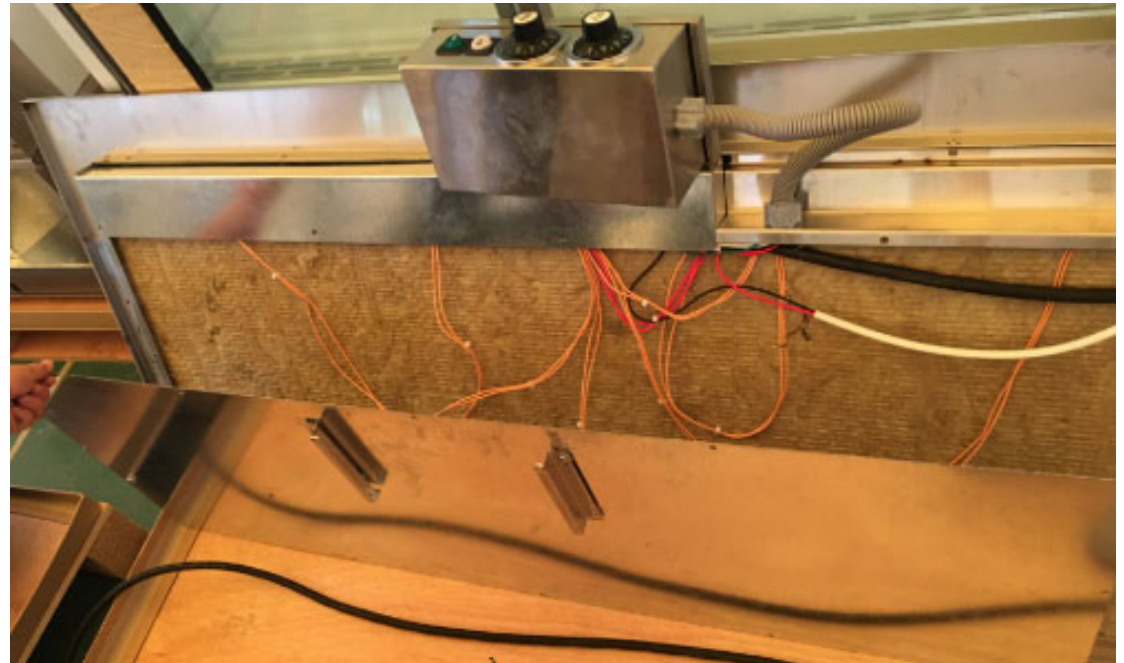

3. Cut off the silicon "on top" and "bottom" of glass

LSCM Glass & Heater replacement



Only for replacing broken glass; if replacing defective heater, skip this step.

4. Remove whole set of glass and heater


LSCM Glass & Heater replacement



Only for replacing broken glass; if replacing defective heater, skip this step.



5. Tear out the heater and replace the defective part

LSCM Glass & Heater replacement

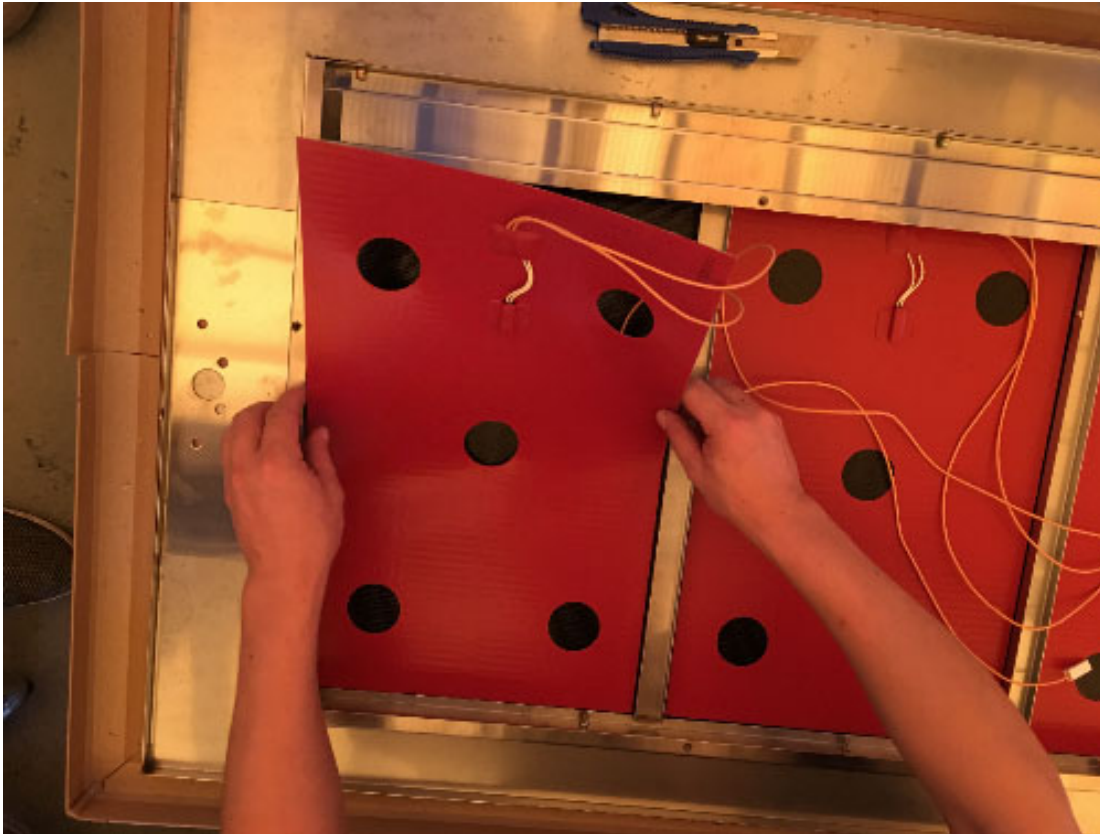

6. Apply silicon on frame & install glass


LSCM Glass & Heater replacement

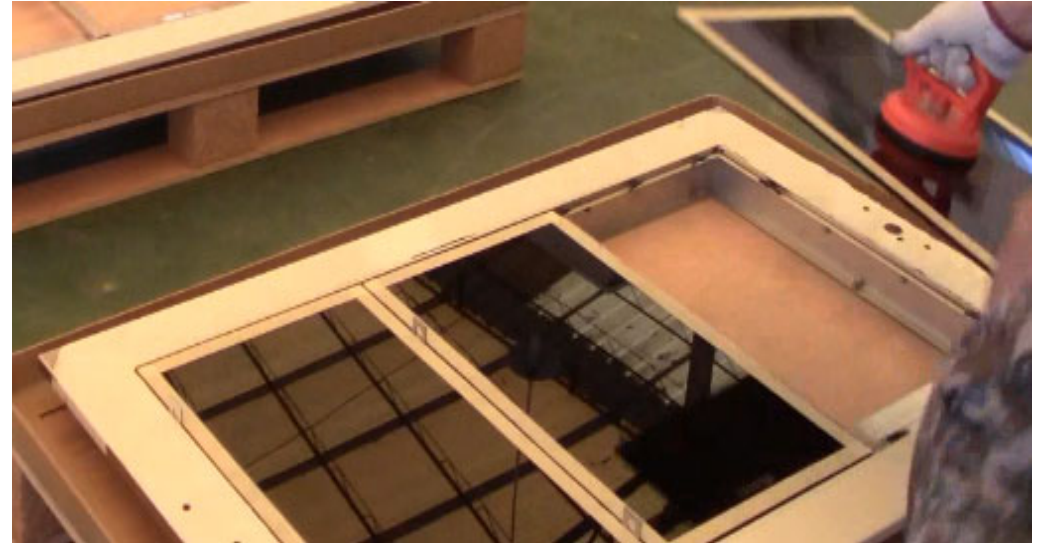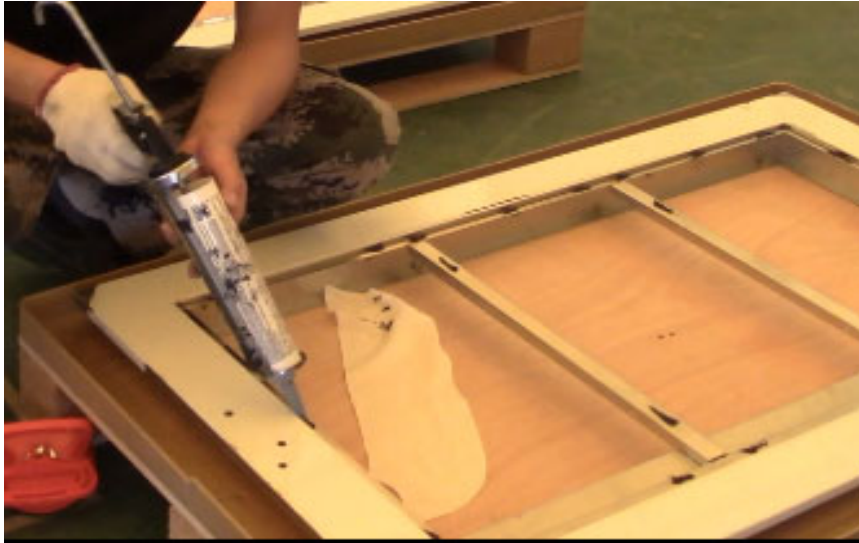

Only for replacing broken glass; if replacing defective heater, skip this step.

.

7. Installed (paste) heater

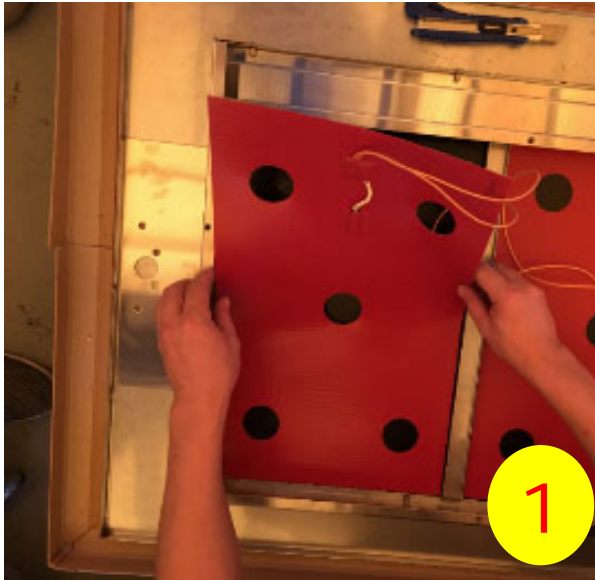

1. Paste the "self-adhesive" heater along the bottom edge; (pic 1)
2. Clean glass surface with alcohol for better bond with new heater.
3. Fold the heater to avoid S/S frame when pasting heater onto glass; (pic 2)

If replacing broken glass, it is recommended to replace heater as well.

8. Confirm the wiring connections



Install all the cover panels