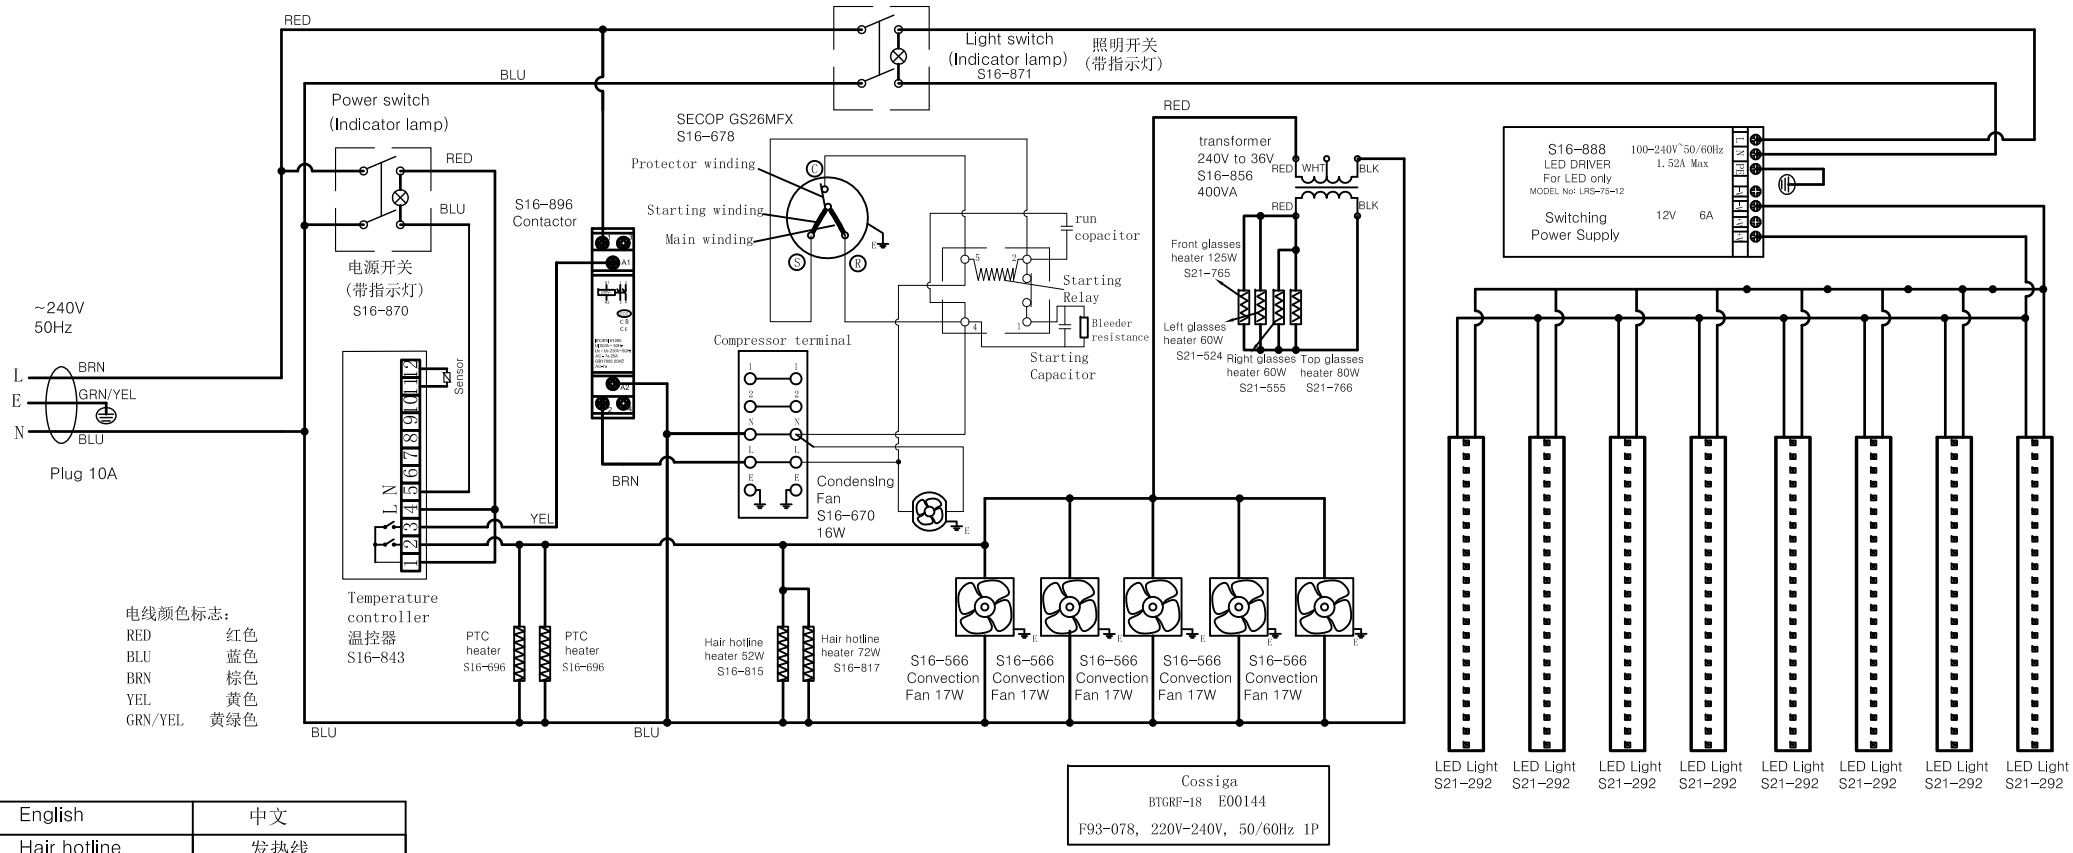

Cossiga
BTGRF-18 E00144
F93-078, 220V-240V, 50/60Hz 1P

English	中文
Hair hotline	发热线
terminal	端子
winding protector	绕组保护
starting winding	启动绕组
main winding	主线绕组
Relay / copacitor	继电器 / 电容
Transformer	变压器
Glasses	玻璃
Plug	插头
Digital Controller	数字控制器
Sensor	感温探头
Contactor	接触器
Compressor	压缩机
Condensing Fan	冷凝风扇
Convection Fan	对流风扇
LED Light	LED 灯
LED DRIVER	LED 控制装置
Heat	单头发热管
EMI FILTER	EMI 滤波器

REV LVL	DESCRIPTION OF REVISIONS	ECO	BY	APP	DATE
A-1	将开关电源更换为LRS-75-12	EC019-019	邓伟雄		2019.11.21

Hole Tolerance	0~3.2	3.2~6.35	6.35~12.7	12.7~19.05	19.05~25.4	Angle Tolerance
	+0.1 -0.05	+0.127 -0.05	+0.152 -0.05	+0.2 -0.05	+0.254 -0.05	±2°
Linear Tolerance	0.5~6	<6~30	<30~120	<120~400	<400~1000	<1000~2000
	±0.3	±0.5	±0.8	±1.2	±2	±3

DO NOT SCALE THIS DRAWING

CRITICAL DIMENSION

1. DIMENSIONS ARE IN mm UNLESS OTHERWISE NOTED;
2. SHEETMETAL FLAT PATTERN=±3 .

CTQ SYMBOL

MEASURABLE ATTRIBUTES THAT ARE CRMCAL TOCUSTOMER SATISFACTION. THIS INCLUDES (BUT IS NOT LIMITED TO) FIT, FORM, FUNCTION, AND APPEARACE

CPK OF 1.33 OR GREATER AS DEFINED BY INSPECTION STANDARD

COSSIGA

Foshan Cossiga Trading Ltd.
佛山科西加贸易有限公司

THIRD ANGLE

THIS PRINT REMAINS THE PROPERTY OF COSSIGA LTD. ALL INFORMATION CONTAINED THEREON IS CONFIDENTIAL. IT IS LOANED, SUBJECT TO RETURN UPON DEMAND, AND ON THE EXPRESS CONDITION THAT IT IS NOT TO BE COPIED OR USED DIRECTLY OR INDIRECTLY IN ANY WAYWHATSOEVER DETRIMENAL TO OUR INTERESTS.

DESCRIPTION:	DWG TITLE:	MATERIAL:
BTGRF18	电路图	

DWG NO.	VER.	WEIGHT:	QTY:
E00144	A-1		1
DRAWN BY:	DATE:	SCALE:	SIZE: A4
APPROVED:	DATE:	SHEET 1 OF 1	