



### PRODUCT FEATURES

- Heated double glazed glass top, sides and front
- Heated rear sub frame
- Argon filled rear doors
- Sliding rear doors
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Sliding front doors - optional


### CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4<sup>0</sup> factory set point

Model	Cabinet			Shelving no.	Shelf length	Base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm					
BTGRF9	900	750	1380	3 + base	790 x 445	840 x 510	100 x 100 136	1.88

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
175g			50 Hertz
R290	4.8 Amp	10amp 3 pin plug	240V





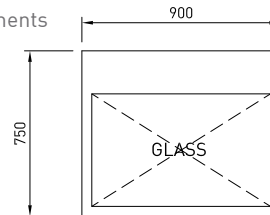


### ELECTRICAL POWER

Electrical power cord 2200mm  
3 pin 10 amp 1 phase socket required  
Maximum ambient operating temperature 3M1 - climate class N

Maximum shelf load weight 15kg  
spread evenly

All units rear venting

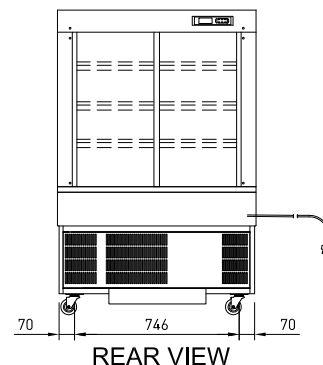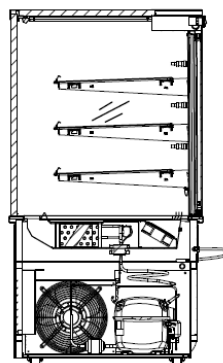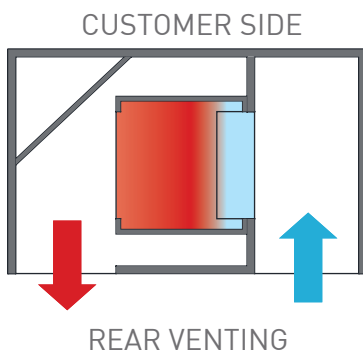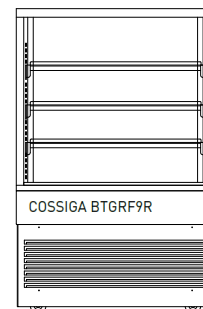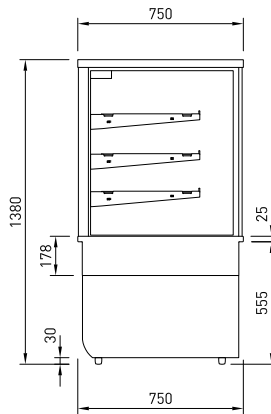

Electrical Safety & EMC  
Regulatory Compliance Mark



GEMS / MEPS Compliance Mark

[Download C.A.D models or contact us on COSSIGA.COM](#)