



PRODUCT FEATURES

- Deck forced refrigeration
- Canopy LED light
- Integral condensor
- Self evaporating
- 65mm deep full size pans supplied
- Glass supplied separately *



UNIT DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			bench cut out hole size	Pans	Refrigerant	Operating Current	Connection	Voltage
	Length mm	Depth mm	Height mm						
LSRF6	2165	690	555	2145x670	6 x 1/1 65mm Gastro Pans	R290	5.5 Amp	10amp 3 pin plug	240V


* prior to installation see, installation guidelines, ventilation requirements and drainage options documents

* GLASS AND GANTRY OPTIONS



When ordering a LS unit select the gantry glass type you require from the [GLASS OPTIONS](#) page in this document.

ELECTRICAL POWER

Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required.
Maximum ambient operating
temperature climate class N max 32°C

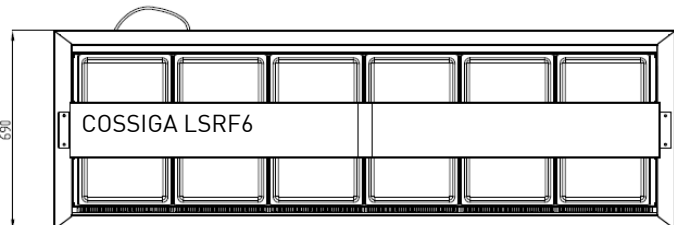

SEE CUTOUT INFO

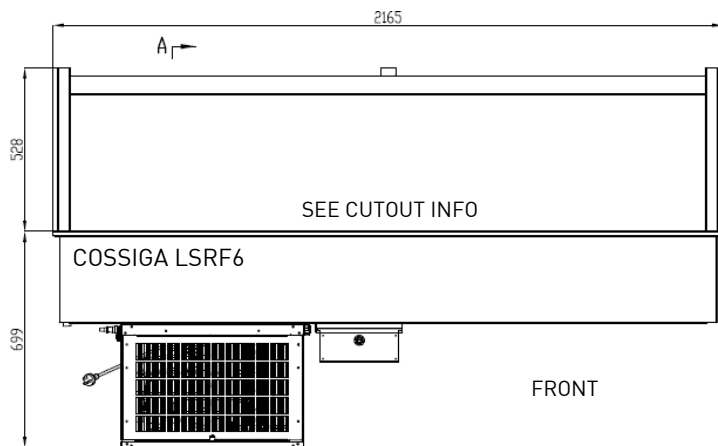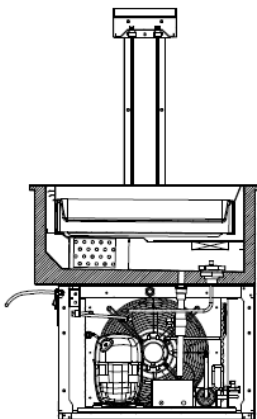

Electrical Safety & EMC
Regulatory Compliance Mark



GEMS / MEPS Compliance Mark