



### PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Two adjustable glass shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Pull down night blind
- Integral condenser
- Pigeonhole perspex screen



### CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4<sup>0</sup> factory set point

Model	Cabinet			Shelving no.	SHELVES SIZE				Total food units	Display m2
	Length mm	Depth mm	Height mm		TOP	2ND	3RD	BASE(WXD)		
BTGOR9	900	750	1380	2+BASE	790X290	790X380	NA	845X515	114	0.96

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents



Refrigerant	Operating Current	Connection	Voltage
250g			50 Hertz
R290	5.8 Amp	10amp 3 pin plug	240V

### ELECTRICAL POWER

Electrical power cord 2200mm  
 3 pin 10 amp 1 phase socket required  
 Maximum ambient operating temperature 25°C @ RH 55

Maximum shelf load weight 15kg spread evenly

All units rear venting

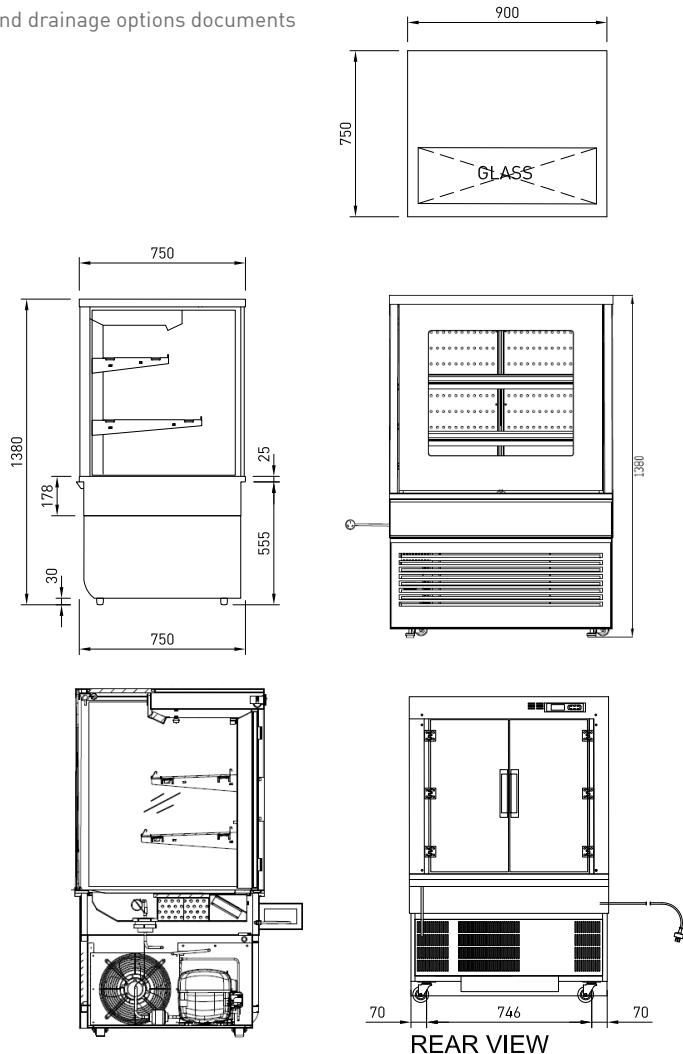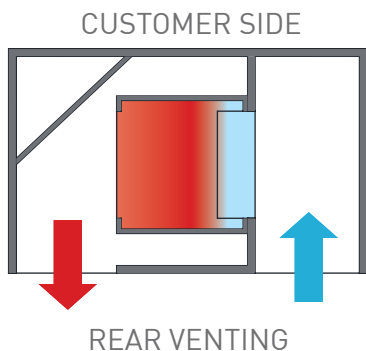

Download C.A.D models or contact us on [COSSIGA.COM](http://COSSIGA.COM)