




## PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

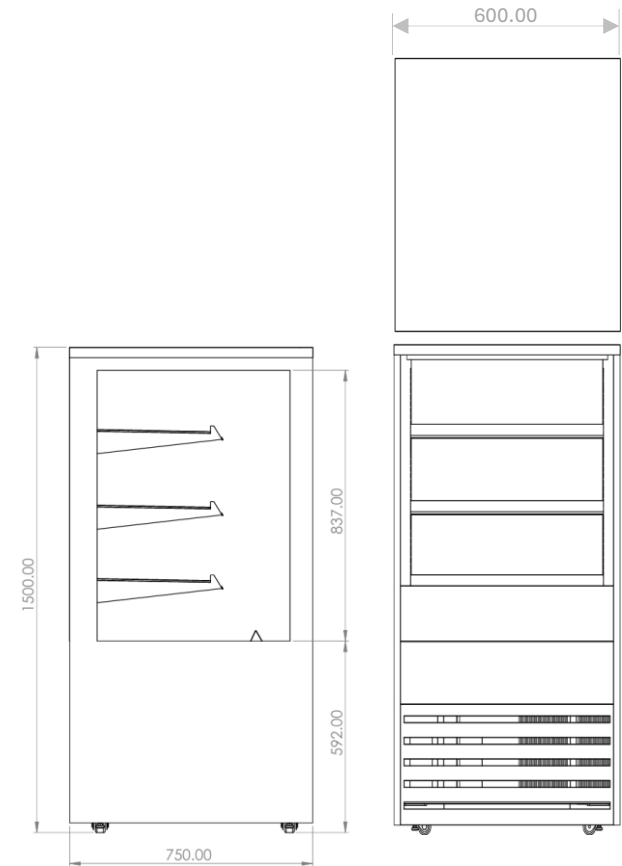


## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)									KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		V	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)
TTGOR6	600	750	1500	192	3 + BASE	3-5	490 X 440	545 X 515	75	0.78	50/60	R290	1.10	6	3 PIN PLUG	3 PIN PLUG	220-240	700	830	1670	223



## PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

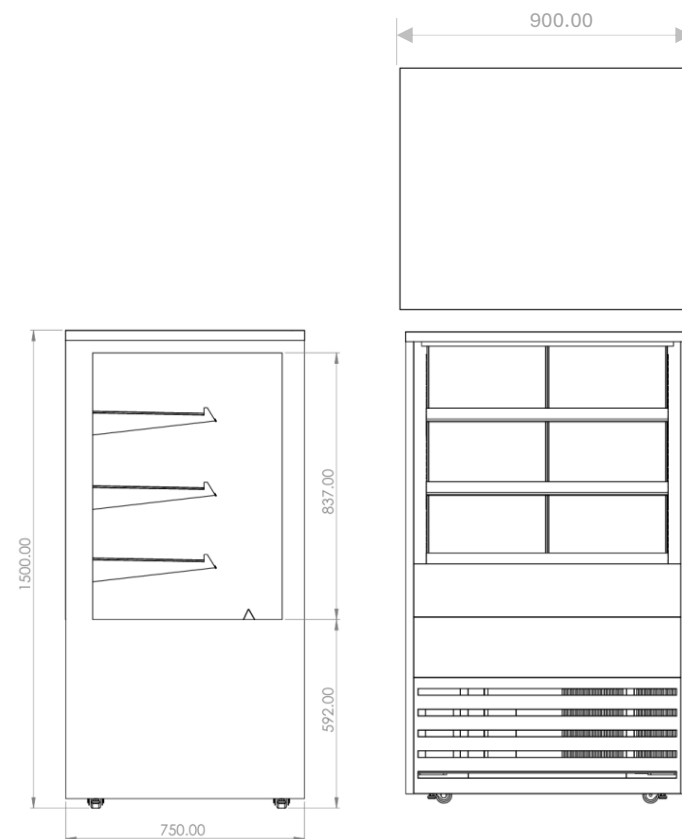


## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET			SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY	FREQUENCY	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING				
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)									WEIGHT KG	DEG C	W X D	W X D		100MM UNITS	M <sup>2</sup>	Hz	KW 230V	AMP
TTGOR9	900	750	1500	224	3 + BASE	3-5	790 X 440	845 X 515	120	1.25	50/60	R290	1.10	6	3 PIN PLUG	3 PIN PLUG	220-240	1000	830	1670	251



## PRODUCT FEATURES

- Open front
- Stainless steel hinged rear doors
- Deck forced refrigeration
- Double glazed glass ends
- Three adjustable shelves – flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser
- Pull down night blind
- Perspex riser

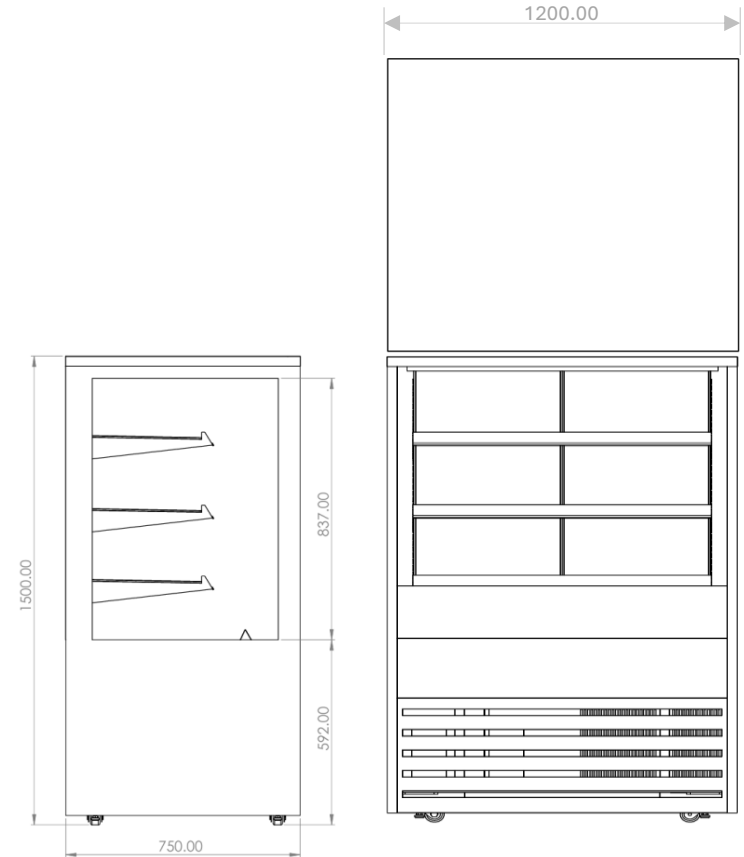

## CABINET DIMENSIONS AND SPECIFICATIONS

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M <sup>2</sup>	FREQUENCY Hz	REFRIGERANT	POWER		CONNECTION POWER CORD 2200MM		VOLTAGE V	PACKED FOR SHIPPING			
	LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)									KW 230V	AMP	NZ/AUS 10 AMP PLUG	UK 13 AMP PLUG		LENGTH (MM)	DEPTH (MM)	HEIGHT (MM)	WEIGHT (KG)
TTGOR12	1200	750	1500	256	3 + BASE	3-5	1090 X 440	1145 X 515	155	1.71	50/60	R290	1.39	7.6	3 PIN PLUG	3 PIN PLUG	220-240	1300	830	1670	284