


BTGAB6




PRODUCT FEATURES

- Single glazed
- Hinged rear door
- Solid front or sliding front doors
- Solid front that hinges at base
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated

Maximum shelf load weight 15kg spread evenly

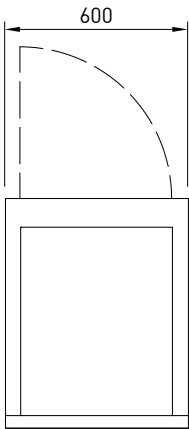

BTGAB6-SD

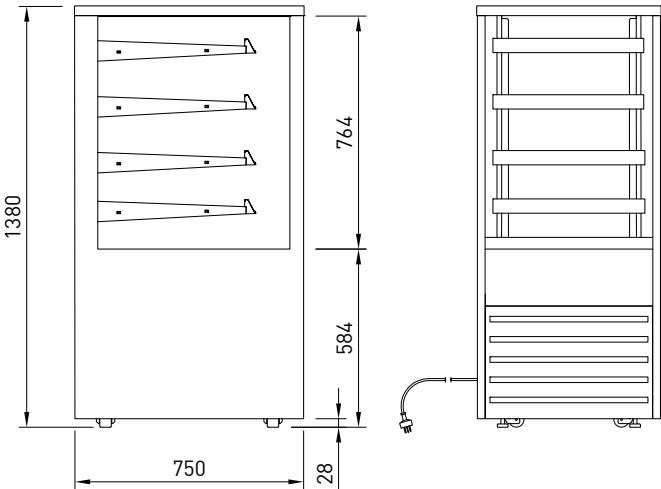

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGAB6 BTGAB6-SD	600	750	1380	112	4 + BASE	N/A	490 X 445	540 x 510	100	1.14	0.29	50 Hz	0.05	0.2	10 AMP	3 PIN PLUG	220-240V	700	830	1550	118


BTGAB9




PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Solid front or sliding front doors
- Solid front that hinges at base
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated

Maximum shelf load weight 15kg spread evenly



BTGAB9-SD

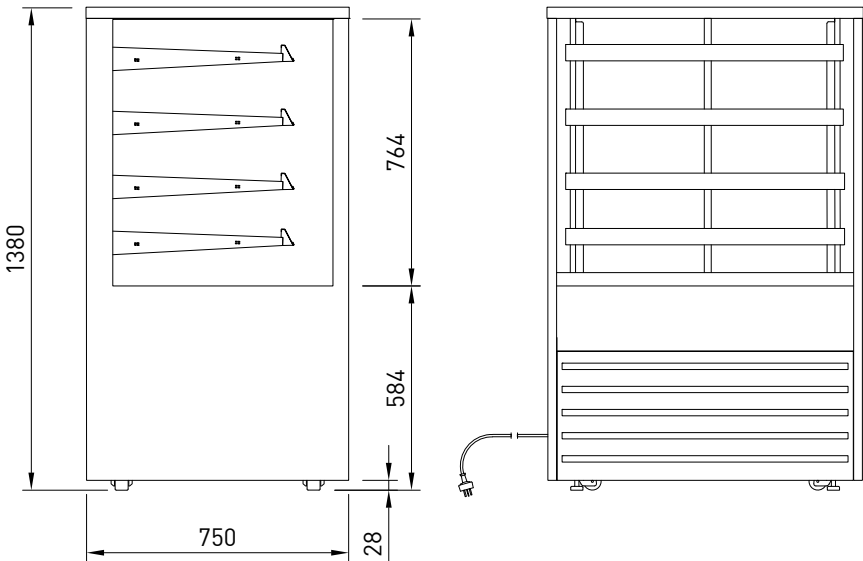

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGAB9 BTGAB9-SD	900	750	1380	146	4 + BASE	N/A	790 X 445	840 x 510	168	1.83	0.45	50 Hz	0.07	0.30	10 AMP	3 PIN PLUG	220-240V	1000	830	1550	152


BTGAB12




PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Solid front or sliding front doors
- Solid front that hinges at base
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated

Maximum shelf load weight 15kg spread evenly

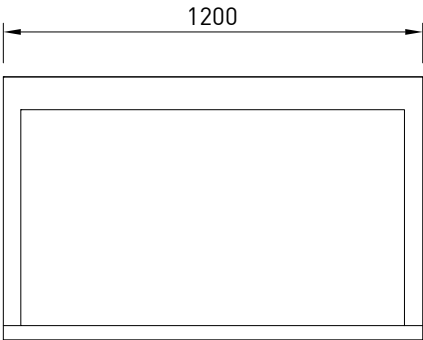

BTGAB12-SD

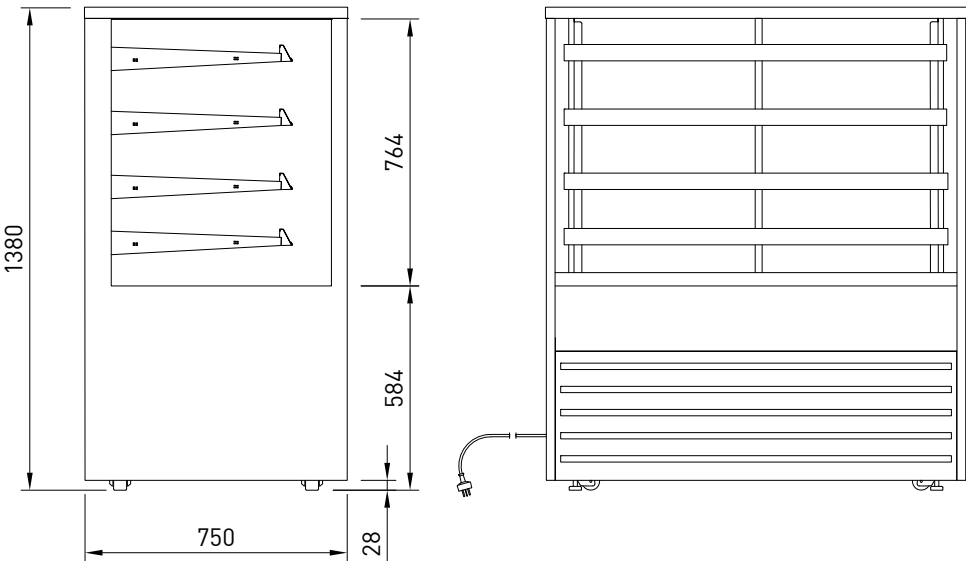

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGAB12 BTGAB12-SD	1200	750	1380	157	4 + BASE	N/A	1090 X 445	1140 x 510	255	2.52	0.60	50 Hz	0.09	0.4	10AMP	3 PIN PLUG	220-240V	1300	830	1550	165


BTGAB15




PRODUCT FEATURES

- Single glazed
- Sliding rear doors
- Solid front or sliding front doors
- Solid front that hinges at base
- Four adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Ambient converted from heated

Maximum shelf load weight 15kg spread evenly

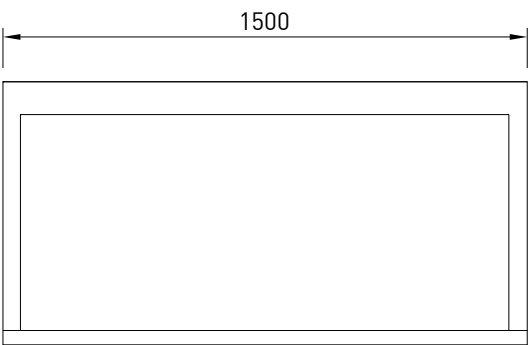

BTGAB15-SD

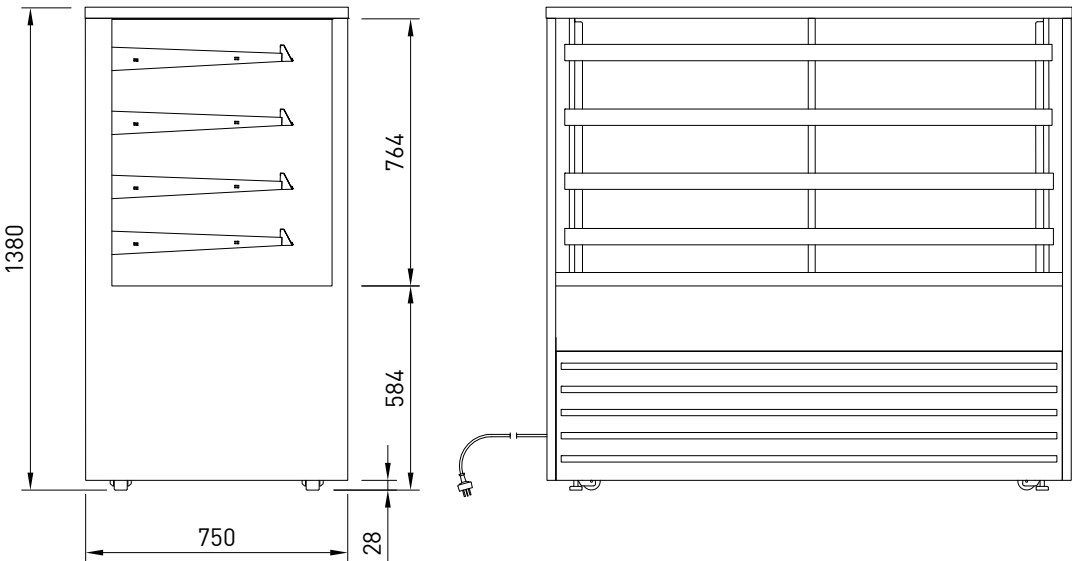

CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines and ventilation requirements document

MODEL	CABINET				SHELVING	OPERATING TEMP	SHELF	BASE TRAY	TOTAL FOOD	DISPLAY M <sup>2</sup>	INTERNAL VOLUME M <sup>3</sup>	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]									KW 230V	AMP	NZ/AUS 3 PIN	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
BTGAB15 BTGAB15-SD	1500	750	1380	170	4 + BASE	N/A	1390 X 445	1440 x 510	355	3.20	0.75	50 Hz	0.12	0.5	10 AMP	3 PIN PLUG	220-240V	1600	830	1550	178