




CC STGCC9
STGCC12

- Compact chilled
- Sliding rear and front doors
- Double glazed
- Deck forced refrigeration
- Two adjustable shelves - flat or angled
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Condensing set built into base

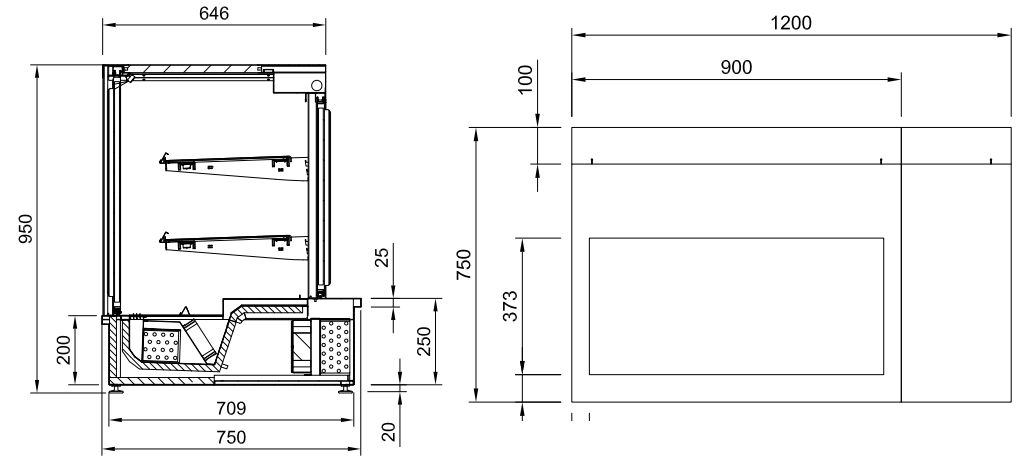


CABINET DIMENSIONS & SPECIFICATIONS




MODEL	CABINET			SHELVING WEIGHT KG	SHELVING 2 + BASE	OPERATING TEMP DEG C	SHELF W X D	BASE TRAY W X D	TOTAL FOOD 100MM UNITS	DISPLAY M ²	INTERNAL VOLUME M ³	FREQUENCY	REFRIGERANT	POWER		CONNECTION ELECTRICAL POWER CORD 2200MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]											KW 230V	AMP	NZ/AUS 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT
STGCC9	900	750	925	183	2 + BASE	3-5	790 X 430	840 x 513	136	0.96	0.45	50/60 HZ	R290	1.04	4.5	3 PIN PLUG	3 PIN PLUG	220-240V	1000	850	1090	189
STGCC12	1200	750	925	220	2 + BASE	3-5	1090 X 430	1140 x 513	175	1.32	0.60	50/60 HZ	R290	1.08	4.7	3 PIN PLUG	3 PIN PLUG	220-240V	1300	850	1090	225

Maximum shelf load weight 15kg spread evenly

Rear venting - Cannot be dropped into counter top

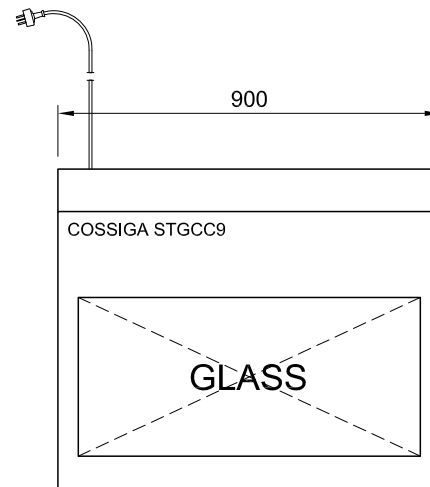


Allow 250mm at rear to any obstruction for rear venting

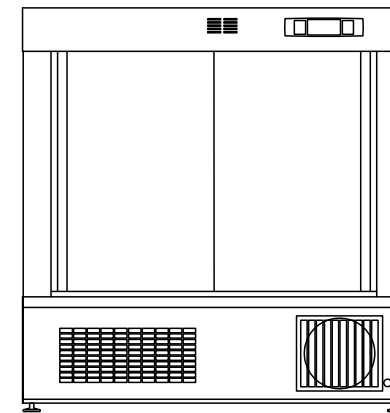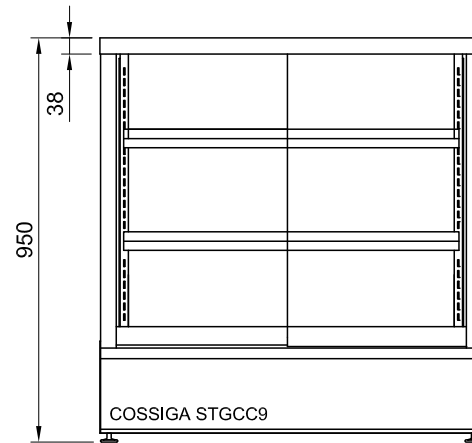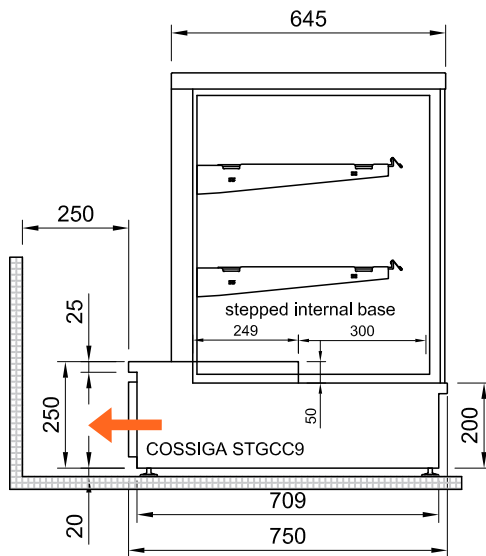




Shelf with ticket strip attached

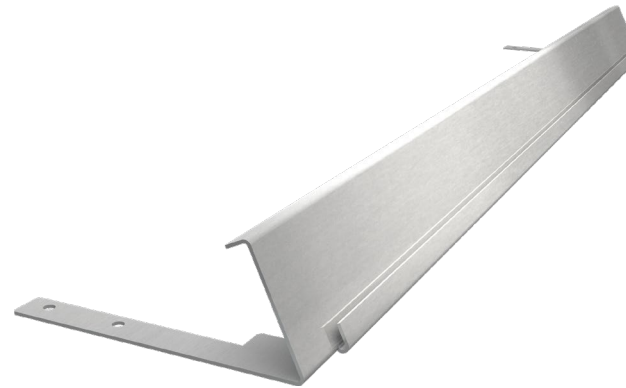

Ticket Strip
Stainless Steel
Attaches to shelf frame



End Profile

Lengths

CABINET LENGTH MM	TICKET STRIP LENGTH
900	775
1200	1075



Price Tabs

Stainless Steel
Write on with marker or adhesive tape
Measure 60mm x 30mm
Sold in packs of 20



Glass Shelf Options

Standard wire racks are removed and replaced with 6mm toughened glass panes

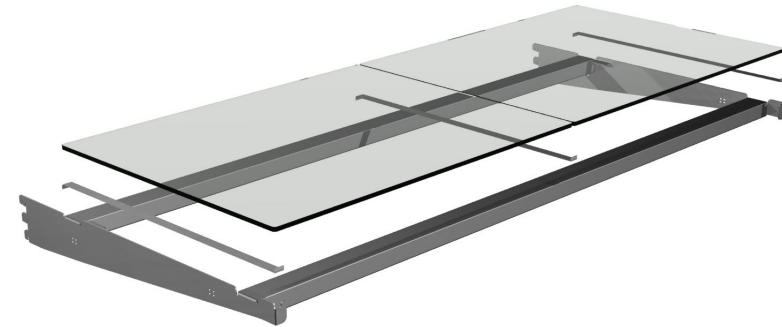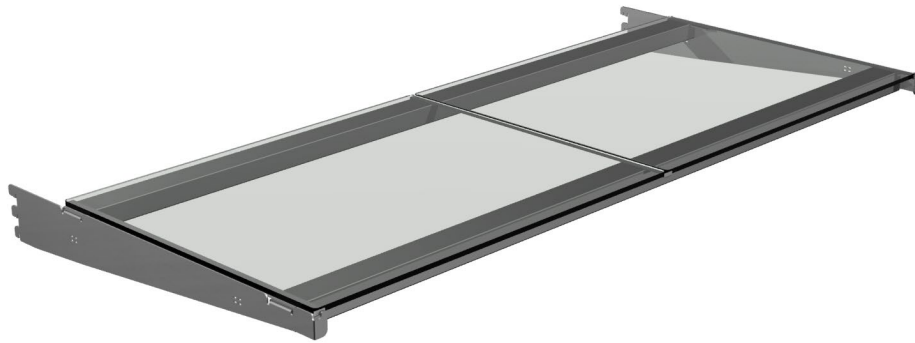

Maximum shelf load weight 15kg spread evenly

MODEL	GLASS	WIDTH MM	DEPTH MM	PER SHELF PANES	SHELVES	TOTAL PANES
STGRF9	6MM TOUGHENED - POLISHED EDGES	390	385	2	2	4
STGRF12	6MM TOUGHENED - POLISHED EDGES	540	385	2	2	4



Support bracket

Mirror film

- Applied to the inside glass rear doors
- Suitable for heated and chilled units




ADDS
DEPTH
TO YOUR
DISPLAYS

BLOCKS
WORK AREAS
BEHIND
UNITS


Mirror film adhered to
inside of rear door glass

Pie Trays


- Stainless Steel Construction
- Placed on shelves for heated food items

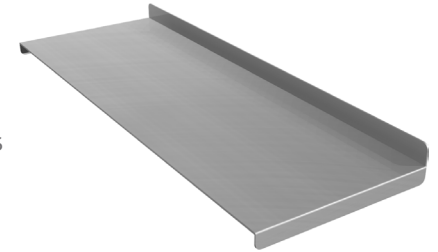


MODEL	CODE	QUANTITY	PIE TRAYS			TOTAL	TRAY WIDTH
			1ST SHELF DEPTH	2ND SHELF DEPTH	3RD SHELF DEPTH		
STG9	AA16016	6 Per Shelf	400MM	400MM	400MM	18 Trays	130MM
STG12	AA16017	9 Per Shelf	400MM	400MM	400MM	27 Trays	120MM

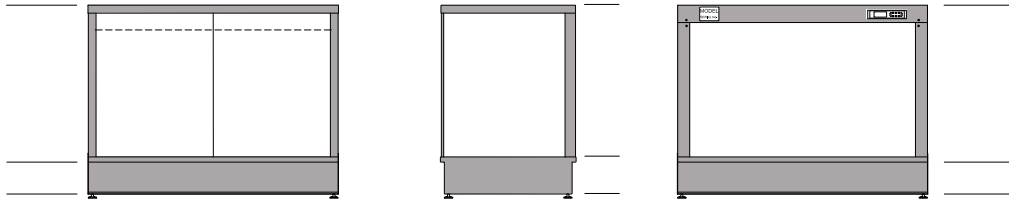

COUNTER TOP MODEL -
all exterior visible areas covered

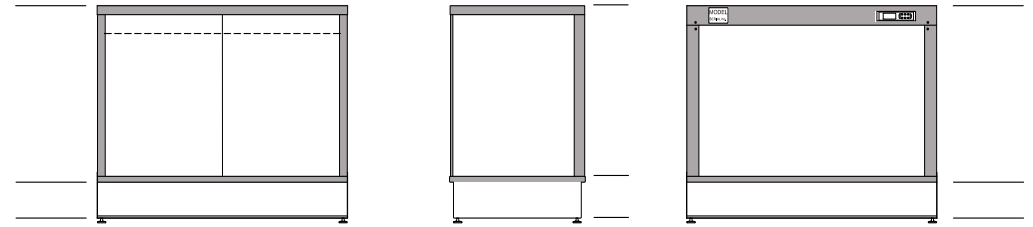

all exterior top visible areas covered

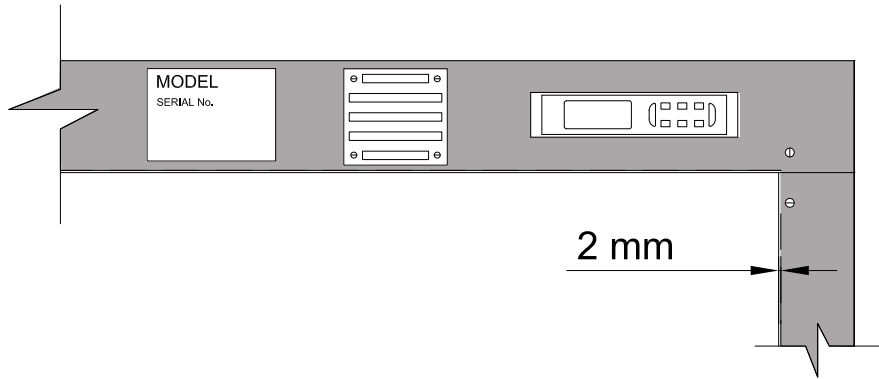

2mm gap left around rear frame

Rear of units cut around serial number plate,
exhaust fan and controller

